





DBI-SALA® is known as the premier brand of fall protection and rescue products around the world. For more than 65 years DBI-SALA® has provided, and still provides today, the best solutions for workers at height, no matter which industry you work in.

We understand that you risk your life every day, while making a living for yourself and your family. We know that it only takes one slip late in the shift to change your life. If this happens, be sure you're wearing the best, so you make it home safely at the end of the day.

DBI-SALA® equipment is legendary for its comfort, ease of use, adjustability, durability and reliability. We offer more than 15,000 equipment choices — the broadest line of fall protection gear on the planet. From flame resistant Kevlar®/Nomex® harnesses and specialized, sealed self retracting lifelines to customized, confined space and horizontal systems, you get gear that's made for you. Every DBI-SALA® product carries a 100% satisfaction guarantee and a lifetime warranty.

Finally, our job isn't done until you know how to use the gear we make. In-house and on-site training are priorities with us. When we exceed worker expectations, you exceed jobsite expectations!







LIFETIME WARRANTY

DBI-SALA® products are warranted for their entire lifetime, to be free from defects in materials and workmanship, under normal use and conditions. Our warranty extends from the product's original date of purchase, in new or unused condition, from any authorized DBI-SALA® brand distributor and applies exclusively to the product's end user. For detailed warranty information, see www.capitalsafety.com.

DESCENT AND RESCUE

devices are used to retrieve an injured worker or lower him to the ground.

TABLE OF CONTENTS

FULL BODY HARNESSES BELTS, WORKSEATS & ACCESSORIES	16-41 42-43
SHOCK ABSORBING LANYARDS POSITIONING LANYARDS	44-53 54-55
SELF RETRACTING LIFELINES	56-69
VERTICAL SYSTEMS	70-81
HORIZONTAL SYSTEMS	82-95
ANCHORAGE CONNECTORS	96-107
CUSTOM ACCESS SOLUTIONS	108-115
CONFINED SPACE RESCUE	116-141
RESCUE AND DESCENT	142-149
NETTING AND GUARDRAIL SYSTEMS	150-157



WE'VE WORKED IN YOUR INDUSTRY FOR DECADES.

DBI-SALA® people climb the rigs in the oil and gas fields. We straddle I-beams on construction sites. We attend tool-box safety discussions with transportation personnel at 5 a.m. And we review tie-off challenges on top of a nacelle hundreds of feet in the air, with wind industry workers. Our people work hard to understand your job, concerns and challenges before we design your equipment. That's how DBI-SALA® goes beyond compliance to produce the broadest, most innovative, high quality fall protection equipment for the world's most vital industries.

WIND ENERGY

DBI-SALA® has been a supplier of choice to the wind industry. We developed specialized ExoFit NEX™ harnesses and Force2™ lanyards, as well as unique rescue and escape systems such as the Rollgliss™ R500.



Our Lad-Saf™ ladder safety systems, offered in both standard and powered climb assist styles, are trusted by wind professionals globally.

TRANSPORTATION

We've developed dozens of specialized products, from evolution™ horizontal systems for railcar loading, to FlexiGuard™ custom access solutions for semi-truck servicing.
We've even designed a patented



fall-arrest-rated vacuum anchor system for aviation workers.



OIL AND GAS

DBI-SALA® was the first to bring "retractable" lifeline technology to the world in the 1940s and the first to bring "sealed retractable" technology to the oil and gas fields. We were the first to test our products to -55°F and meet the IP68 seal rating.

And we developed specialized equipment and training for a wide array of emergency escape devices.

MINING

DBI-SALA® developed harnesses for specialized miners gear and FlexiGuard™ systems to protect them while doing maintenance on oversized mining industry trucks.



CONSTRUCTION

DBI-SALA® understands that there's no more complex work environment than a construction site. We work closely with contractors to help us fine tune our design on key products, such as the Saflok MAX™

hook, used

widely

today on

concrete forms. We listened to steel erectors and created shoulder caps that protect the webbing on our Exofit NEX™ harnesses. EZ-Line™ is today's most user-friendly horizontal lifeline system and the world's only retractable design. Our industry-first, twin-leg Talon™ self retracting lifeline provides 100% protection and mobility.













GENERAL INDUSTRY

DBI-SALA® knows that every day thousands of manufacturing and facility workers around the world don safety boots and goggles, then head out to do their job. Whether you're processing, milling, finishing, inspecting or doing routine maintenance, DBI-SALA® has the products you want. We've developed specialty Advanced confined space equipment, tie-back Talon™ self retracting lifelines, ExoFit NEX™ harnesses, ShockWave™ lanyards, Lad-Saf™ ladder safety systems and innovative guardrail and netting solutions.

UTILITY, TELECOM AND MUNICIPALITIES

DBI-SALA® has been proactive in developing
equipment for these unique industries. Our
innovations include speciality Advanced confined
space equipment, Cynch-Lok™ and Saflok™ Pole
Anchors and Kevlar®/Nomex® constructed arc
flash products, including the first arc flash self
retracting lifeline.



OUR SITE OR YOURS. TRAINING ANYTIME, ANYWHERE.



Workers' lives are on the line every day, but ensuring their safety starts long before the job begins. No one understands this better than Capital Safety. Our training is based on 65 years of expertise and jobsite implementation around the globe.

capital

When it comes to protecting your work site, we deliver. We offer superior courses in world-class training facilities, based on standard curriculums or custom programs specific to your jobsite. Our comprehensive training provides practical, hands-on experience, including: scaffolding, fixed ladders, towers, sloped roofs, rebar walls, elevated catwalks, I-beams and confined spaces. Every course we offer exceeds industry standards set by OSHA, MSHA, ANSI, CSA and CE.

OPEN ENROLLMENT COURSES

are designed to a standard that ensures you are trained competently.

- COMPETENT PERSON
- COMPETENT PERSON TRAINER
- COMPETENT INSPECTOR
- PROGRAM ADMINISTRATOR
- COMPETENT CLIMBER & RESCUER
- AUTHORIZED PERSON
- QUALIFIED PERSON
- COMPETENT PERSON REFRESHER
- WIND ENERGY COMPETENT RESCUER
- WIND ENERGY COMPETENT RESCUER TRAINER
- CONFINED SPACE ENTRANT/SUPERVISOR
- CONFINED SPACE RESCUE
- CONFINED SPACE TRAINER



For greater flexibility, Capital Safety can bring standard courses, or a customized version, directly to your location. We will provide the necessary equipment and trainers required for your class size. A mobile training trailer, with climbing structure, will be available by summer 2011, for added hands-on training at any customer site.



In addition to basic courses, we offer courses for particular trades and specific industry work requirements. These include: Oilfield Rig Workers Awareness, Rig Rescue, Tower Climbing/Rescue, Confined Space Entry and Retrieval and more. We'll also customize courses.









FALL PROTECTION AWARENESS DEMONSTRATIONS

Our North American fleet of more than 40 specialized vehicles can bring on-site, hands-on fall protection demonstrations to your workforce. We demonstrate actual drop-tests with force measuring instruments so workers are familiar with the arresting forces they may experience during a fall. This provides an excellent introduction to fall protection.





THE MOST ADVANCED WAY TO TRACK SAFETY EQUIPMENT AND MANAGE YOUR SAFETY INSPECTION PROGRAM.

I-SAFE™ 3.0 NOW WITH MULTIPLE INTEGRATION OPTIONS

- Updated inspection status of each piece of equipment
- Tracks location and controls distribution of equipment
- Provides complete, documentable proof of compliance
- Offers multiple standard and customizable system software solutions

INSPECTION TRACKING

- Enhance user safety with up-to-date inspection logs
- Verification system promotes compliance
- Electronic record for traceability and audit
- Multiple reporting options available

INVENTORY CONTROL

- Tracks inventory on sites around the globe
- Paperless, accurate asset management
- Easy information retrieval, inventory control
- Helps to mitigate theft

INFORMATION MANAGEMENT

- Real-time updates ensure accurate equipment status
- Instant access to key information streamlines logistics, safety management
- Accountability by logging product, inspection status, by job

i-Safe[™] is an intelligent safety system. It uses Radio Frequency Identification (RFID) to maximize the effectiveness and minimize the total cost of your safety program.

i-Safe™ allows you to easily record and access information on inspections, inventory and use. It tracks equipment assignments by worker or location. The system also automates the inspection process, with preloaded templates

and other tracking information.

There are multiple system options available — using a web portal or versions that can be stored on your own equipment or behind your own firewall.

This allows for easy access and time-saving information management. In addition, mobile devices are supported for in-the-field, on-site





inspections. Almost all new DBI-SALA® fall protection products are delivered from the factory already RFID-enabled. Retrofit tags are also available to outfit existing inventory and other safety equipment. Whether you're responsible for a single construction site, a manufacturing plant or a series of oil rigs, i-Safe™ makes it easier to manage your safety inspection program.



i-Safe[™] Tag

i-Safe™ tags are standard equipment on most DBI-SALA® products. Each tag is programmed with its unique ID that registers its model type and history. i-Safe™ 3.0 utilizes high frequency (13.56 MHZ) module tags supporting ISO 15693.



Handheld RFID Reader

Tags can be read in the field with the handheld RFID reader, then synced with the full system back in the office, allowing for on-site inspections. Easy-to-use interface allows complete asset visibility.



Data Portal

Information is then linked with the web portal or stand alone system to ensure up-to-date asset status. You also have access to related safety and equipment information, training records, product advisories and other useful links.



Tag Kits

Easy do-it-yourself tag kits are available for all types of equipment, including harnesses, lanyards and SRLs—allowing you to extend the benefits of your i-Safe™ system to your entire inventory, regardless of brand or asset type.





UNIVERSAL HARDGOODS TAG



9000101 i-Safe[™] Reader



9000099 i-Safe™ Reader

9505839 Kit, Hardgoods Tag, 25 pack with Zip Tie, Adhesive Pad, and Key-Ring
9505841 Kit, Softgoods Tag, 25 Pack, with Zip Ties
9505843 Kit, Cable Tag, 4 Pack, with Round Ball Bumper
9506655 Kit, Softgoods Tag, 100 pack with Zip Ties
9506656 Kit, Hardgoods Tag, 100 pack with Zip Tie, Adhesive Pad, and Key-Ring
9000098 i-Safe™ Reader, Psion WAP G3, HF with Docking Station*
9000042 i-Safe™ Reader, Psion WAP, Docking Station Only
9000099 i-Safe™ Reader, Psion Ikon, HF with Docking Station*
9000100 i-Safe™ Reader, Psion Ikon, Docking Station Only
9000101 i-Safe™ Reader, Unitech, HF, with Docking Station*
9000102 i-Safe™ Reader, Unitech, Docking Station Only

*Software must be purchased separately

SALA



Choose the i-Safe[™] product that's right for you.

This chart allows you to identify the i-Safe™ system that best satisfies your needs for today and the future.

Feature/Description	i-Safe™ 3.0 Web Limited Edition	i-Safe™ 3.0 Web Pro Edition	i-Safe™ 3.0 Desktop Edition	i-Safe™ 3.0 Network Edition
Target Customer	Very Small Organizations No IT	Small Organizations Minimal IT	Small - Medium Organizations Minimal IT	Large Organizations Extensive IT
Data Location	Capital Safety Hosted Site	Capital Safety Hosted Site	End-User Internal PC	End-User Network
Assets Tracked	250 (1)	Unlimited	Unlimited	Unlimited
Pre-defined Inspection Templates - Fall Protection	Yes	Yes	Yes	Yes
Pre-defined Inspection Templates - Other	No	Optional	Optional	Optional
Number of Hand-Held Computers Supported	Optional (1)	Optional	Optional	Optional
Smartphones and Other Mobile Platform Portals Supported	No	Optional	Optional	Optional
Email Alerts	None	Optional	Optional	Optional
Email Offers	None	Optional	Optional	Optional
Reports	5	10 (Plus Optional)	20 (Plus Optional)	20 (Plus Optional)
Certificates, Filters, & Inspections	Yes	Yes (Plus Optional)	Yes (Plus Optional)	Yes (Plus Optional)
Process Customization	None	None	Optional	Optional
Software Customization	None	Minimal Optional	Full Optional	Full Optional
High Frequency RFID (HF-RFID) Tag Scanning Supported	No	Yes	Yes	Yes
HF-RFID Tags Included on All DBI-SALA® Products	Yes	Yes	Yes	Yes
Barcode Scanning Supported	No	Optional	Optional	Optional
Handheld Computers Available from Capital Safety (HF-RFID)	3 Models	3 Models	3 Models	3 Models
Handheld Computers Available from Capital Safety (RFID/Barcode)	1 Model	1 Model	1 Model	1 Model
Remote Support	Minimal	Basic Included in Maintenance	Basic Included in Maintenance, Additional Optional	Basic Included in Maintenance, Additional Optional
On-Site Installation Support	None	None	Optional	Optional
On-Site Training	None	Optional	Optional	Optional
Desktop/Network Software Investment	Free	Annual Fee	One Time Fee	One Time Fee
Handheld Computer Software Investment	N/A	Annual Fee	One Time Fee	One Time Fee
Software Support and Maintenance Fee	N/A	Included	Annual Fee	Annual Fee
Handheld Computer Software Support and Maintenance	N/A	Included	Annual Fee	Annual Fee
Handheld Computer Hardware Maintenance Agreement	N/A	Annual Fee	Annual Fee	Annual Fee

Notes: (1) DBI-SALA® Assets Only

CALL DBI-SALA® TODAY FOR AN I-SAFE™ 3.0 SOLUTION TAILORED TO YOUR NEEDS.





A harness is your single most important equipment choice. It affects your safety in many different ways. But its design and craftsmanship also have a direct influence on your comfort, confidence, productivity and versatility on the job.

DBI-SALA® harnesses—ExoFit Nex™, ExoFit™ XP, ExoFit™ and Delta™—have earned a reputation for maximum comfort, freedom of movement and ease-of-use, as well as launching innovations such as the spring-loaded, stand-up back D-ring, Delta™ No-Tangle pad and the Revolver™ torso adjusters.

Many of our harnesses can be used on most jobs. DBI-SALA® also manufactures harnesses for specific uses within industries such as Construction, Oil and Gas, Transportation, Utilities/Telecommunications and Municipalities and Wind Energy. General- and specific-use harnesses will be identified on the following pages.

All harnesses meet OSHA and ANSI standards, including the stringent ANSI Z359.1.

Equipped with







CHOOSING YOUR HARNESS

Look for quality in these features when selecting your harness.

1 DORSAL CONNECTION

The fall arrest point must be located on the back, positioned between the shoulder blades. Your harness must always include a dorsal attachment point.



Webbing is an important factor in the durability and safety of the harness. Ensure that the webbing is strong enough to endure rough use, exposure to sunlight and other elements without tearing or fraying. Specialty applications such as welding and electrical maintenance require Nomex®/Kevlar® or nylon that offers fire resistance or arc flash protection.

3 ADJUSTING POINTS

Whether you wear a harness 4 hours a day or 14, it needs to fit right for safety and comfort. Harnesses with adjusting points on the legs, waist (belt models), chest and torso allow a better fit.

4 LEG STRAPS

Depending on worker preference, leg strap fasteners may be available in different styles, including:





Tongue Buckle

Pass-Thru Buckle Quick Connect Buckle

5 PELVIC SUPPORT

A sub-pelvic strap provides additional support, security and comfort for the user. Properly positioned, it better distributes forces during a fall.





6 BOOK STYLE LABELS

Book style labels put product and inspection information at the workers' fingertips. Pages may include sizing, operating instructions, inspection log, warning labels and compliance information. These labels promote quick inspection, compliance and safety.



7 STITCHING

Double box stitching provides maximum strength and durability. It's sewn-in quality you can trust.



Cushioned shoulder, leg and hip pads keep the pressure off, providing extra worker comfort for long hours of wear. In a fall, they absorb shock and help distribute your weight. They may be built-in to avoid slipping or may be removable.



9 SEAT SLINGS

A removable seat sling provides job versatility and added comfort during long hours of use.



10 IMPACT INDICATORS

Impact indicators provide immediate notice that the worker and harness have been in a fall. This feature promotes safety and proper inspection.



111 LANYARD KEEPERS

A lanyard keeper provides a place to park your lanyard when not in use. It prevents tripping and entanglement for enhanced safety.




12 BREATHABLE LININGS

The ExoFit™ series of harnesses feature breathable linings that wick moisture away from your body, so you stay dry and comfortable in heat or cold.



ExoFit NEX™, ExoFit™ XP, ExoFit™ & Delta™ FULL BODY HARNESS SIZING CHART

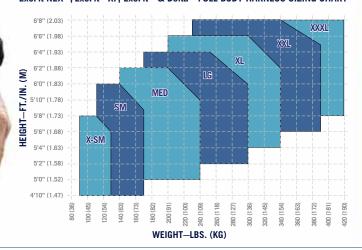

TYPES OF HARNESSES

DBI-SALA® harnesses are available in different types, with various features, depending on their intended use.



MULTI-PURPOSE HARNESS

This type typically includes extra attachment points which allow work in a variety of situations. The belt and pad provide additional back lumbar support, positioning rings and tool carrying options.



WORK POSITIONING HARNESS

These harnesses have positioning D-rings located on the hips for use with pole straps or work positioning lanyards, which allow hands-free operation. Harnesses of this kind may include integral waist belts.



LADDER CLIMBING HARNESS

Harnesses with a frontal attachment point, for connection to permanent ladder safety systems.



DESCENT CONTROL HARNESS

These harnesses typically have frontal attachment points for use with descent control devices.



CONFINED ENTRY/RETRIEVAL HARNESS

One attachment point located on each shoulder strap facilitates upright retrieval from confined spaces.

OFIT NEXT

The Ultimate Full Body Comfort Harnesses

ExoFit NEX™ harnesses are the newest, most advanced harnesses in the industry. They're the culmination of our experience with ExoFit™ and ExoFit™ XP, ongoing research and the incorporation of new materials and innovative features. When you purchase an ExoFit NEX™ harness, you can be certain that you're purchasing the finest harness available today, from DBI-SALA® or anyone else.

COMFORT • True to our NEX mission, we manufacture these harnesses using materials that won't add unnecessary weight.

FUNCTION • When speed and efficiency are project requirements, ExoFit NEX™ will provide the freedom and confidence to function at your maximum potential.

DURABILITY ■ ExoFit NEX[™] harnesses are designed using materials that last.

TORSO ADJUSTERS

Simple and fast adjustments that eliminate loose ends and lock into place, preventing slippage.

HYBRID COMFORT PADDING -

Lightweight, moisture wicking and breathable padding won't move or slip, always keeping the wearer comfortable.

TECH-LITE™ ALUMINUM D-RINGS

Extremely lightweight alloy commonly used in military and aerospace offers a higher level of security and comfort.

INTEGRATED TRAUMA STRAPS

Provide an adjustable, continuous loop for post fall, minimizing suspension trauma.

DUO-LOK™ QUICK CONNECT BUCKLES

Lightweight one-handed use with memory-fit web-lock ensures fast, non-slipping connections.

Equipped with



ULTRA-SOFT EDGING

E) OFIT

NEX-

Moves with you. Doesn't rub or chafe.

PROTECTIVE SHOULDER CAPS

Provide protection and comfort when carrying heavy materials.

MOLDED LANYARD KEEPERS

Easy holstered snap hooks break away to avoid trip hazard.

REFLECTIVE MATERIAL

For greater visibility in dark and dangerous environments, reflective material is integrated on legs, chest, shoulders and back.

BUILT-IN CARRYING POCKET

Conveniently holds and protects a cell phone, camera or other items.

REPEL TECHNOLOGY WEBBING

Water repellent to reduce attraction of mold and dirt—also has up to 5 times more abrasion resistance.



STAND-UP DORSAL D-RING

Patented spring-loaded design automatically stands-up, ensuring fast, easy and safe connections to your fall arrest system.



Model Shown 1113130



A single piece of material in the shape of an X wraps around the wearer for the ultimate in comfort. security and no-tangle donning.



EXOFIT NEX™

VEST-STYLE FULL BODY HARNESSES

Vest-style harnesses are the most universal, with multiple configurations and connection point options. They're used across a wide variety of industries.



1113055 Exofit nex™ Vest-style harness

Aluminum back and side D-rings, locking quick connect buckles. (XLarge)

1113046 Small

1113049 Medium

1113052 Large



1113070

EXOFIT NEX™ VEST-STYLE HARNESS

Aluminum back and shoulder D-rings, locking quick connect buckles. (XLarge)

1113061 Small

1113064 Medium

1113067 Large



1113040

EXOFIT NEX™ VEST-STYLE HARNESS

Aluminum front and back D-rings, locking quick connect buckles. (XLarge)

1113031 Small

1113034 Medium

1113037 Large



1113085 EXOFIT NEX™

back and side D-rings,

EXOFIT NEX™
VEST-STYLE HARNESS
Aluminum front,

locking quick connect buckles. (XLarge)

1113076 Small

1113079 Medium

1113082 Large



1113010

1113001 Small

1113007 Large

1113004 Medium

EXOFIT NEX™ VEST-STYLE HARNESS

Aluminum back D-ring, locking quick

connect buckles. (XLarge)

A front-mounted D-ring makes the cross-over style ideal as a rescue harness and for ladder climbing applications.



1113100

EXOFIT NEX™ CROSS-OVER STYLE HARNESS

Aluminum front and back D-rings, locking quick connect buckles. (XLarge)

1113091 Small

1113094 Medium

1113097 Large



1113115

EXOFIT NEX™ CROSS-OVER STYLE HARNESS

Aluminum front, back and side D-rings, locking quick connect buckles. (XLarge)

......

1113106 Small

1113109 Medium

FULL BODY HARNESSES

EXOFIT NEX[™]

TOWER CLIMBING HARNESSES

Tower climbing models are built to keep workers comfortable during extended hours in harness. Tool loops are ideal for carrying equipment.

1113193

EXOFIT NEX™ TOWER CLIMBING HARNESS

Aluminum front, back and side D-rings, locking quick connect buckles with sewn-in hip pad and belt, removable seat sling with positioning D-rings. (XLarge)

1113190 Small

1113191 Medium

1113192 Large



BACK VIEW


A removable seat sling adds even more comfort, for those who wear them all day long.

EXOFIT NEX™

CONSTRUCTION STYLE HARNESSES Made for general construction work, these harnesses have excellent tool-carrying capability, sewn-in hip pad and removable body belt.



Protective hip padding loops prevent equipment pouches from sagging and reduce abrasion in vulnerable areas.



Easily adjusted tongue buckle body belt.



EXOFIT NEX™ CONSTRUCTION **STYLE HARNESS**

Aluminum back and side D-rings, locking quick connect buckles with sewn-in hip pad, removable belt. (XLarge)

1113121 Small

1113124 Medium

1113127 Large



1113160

EXOFIT NEX™ CONSTRUCTION STYLE HARNESS

Aluminum front, back and side D-rings, locking quick connect buckles, sewn-in hip pad, removable belt.

(XLarge)

1113151 Small

1113154 Medium





EXOFIT NEX™ MINERS' HARNESSES

Our miners' harnesses are made with belts constructed specifically to hold equipment carried by miners.





1113199

EXOFIT NEX™ MINER'S HARNESS

Aluminum back D-ring, locking quick connect buckles, integrated hip padding with belt and miner's equipment straps. (XLarge)

1113195 Small

1113196 Medium

1113197 Large

BACK VIEW

VOLIT VICTOR

FULL BODY HARNESSES

EXOFIT NEX™

OIL & GAS FULL BODY HARNESSES

The ExoFit NEX $^{\text{TM}}$ Oil & Gas models combine the industry 1st innovations of the ExoFit NEX $^{\text{TM}}$ with the additional features developed specifically for the needs of the on and off shore drilling markets.

1113297

EXOFIT NEX™ OIL & GAS HARNESS

18" D-ring extension, derrick attachments, hip pad & belt with rigid seat sling (Large). For use with 1003221 derrick belt (order separately).

1113295 | Small

1113296 | Medium

1113298 | Large





1113292 **EXOFIT NEX™** (

EXOFIT NEX™ OIL & GAS HARNESS

18" D-ring extension, derrick attachments, quick connect chest buckle, hip pad & belt with lumbar D-ring and soft seat sling (Large). For use with 1000570 derrick belt (order separately).

1113290 | Small

1113291 | Medium

1113293 | XLarge

1113305 | Small (pass-thru chest buckle)

1113306 | Medium (pass-thru chest buckle)

1113307 | XLarge (pass-thru chest buckle)

1113287

EXOFIT NEX™ OIL & GAS HARNESS

18" D-ring extension, derrick attachments, lifting D-rings off hips (Large). For use with 1003221 derrick belt (order separately).

1113285 | Small

1113286 | Medium

1113288 | XLarge



DERRICK BELT

With tongue buckle attachment (Large) (Harnesses sold separately.)

0000000



DERRICK BELT

1003230 With tongue buckle attachment (Small).

1003220 With tongue buckle attachment (Medium).

1003222 With tongue buckle attachment (XLarge).

1000572 With pass-thru attachment (Small).

1000573 With pass-thru attachment (Medium).

1000570 With pass-thru attachment (Large/XLarge).



EXOFIT NEX™

ROPE ACCESS & RESCUE HARNESSES—Certified to NFPA 1983

The ExoFit NEX™ Rope Access and Rescue Harnesses incorporate the most advanced technologies in the industry. These multi-use harnesses are ideal for the professional performing rescue and emergency services, industrial rope access and rigging, wind energy and tower maintenance—as well as for aborist activities. The harnesses combine specialized designs, components and hardware to optimize rope rescue and industrial rope access work.



1113348

EXOFIT NEX™ ROPE ACCESS AND RESCUE HARNESS

Repel™ web, Tech-Lite™ aluminum front, back and side D-rings, Duo-Lok™ quick connect buckles and hybrid comfort padding (XLarge)

1113345 | Small

1113346 | Medium

1113347 | Large

EXOFIT NEX[™] ROPE ACCESS & RESCUE BLACKOUT HARNESS

1113373

EXOFIT NEX™ BLACK-OUT ROPE ACCESS AND RESCUE HARNESS

Repel™ web, Tech-Lite™ aluminum front, back and side D-rings, Duo-Lok™ quick connect buckles and hybrid comfort padding (XLarge)

1113370 | Small

1113371 | Medium

1113372 | Large





EXOFIT NEX™ ARC FLASH

EXOFIT

Model Shown

420 LB.

CAPACITY

ON ALL MODELS

1113318

The Ultimate Full Body Comfort Harnesses

ExoFit NEX™ Arc Flash models feature flame resistant and non-conductive construction, making them perfect for use where high voltage electricity or hot-work such as welding is a concern. These harnesses include all of the Comfort, Function and Durability features of the original NEX harness. In addition to meeting the ASTM F887-11 arc flash standard specification for personal climbing equipment, they also meet ANSI Z359 and CSA requirements.

FLAME RESISTANT WEBBING

Nomex® exterior with Kevlar® core and thread provides 7,000 lb. strength and ultimate flame resistance.

REVOLVER™ VERTICAL TORSO ADJUSTERS

Simple and fast adjustments that eliminate loose ends and lock into place, preventing slippage.

PVC COATED TECH-LITE™ ALUMINUM D-RINGS

Non-conductive, extremely lightweight aluminum alloy hardware offers the highest level of comfort and security.

FLAME RESISTANT TRAUMA STRAPS •

Provide an adjustable, continuous loop for post fall, minimizing suspension trauma.

INTEGRATED INSULATORS

Leather insulators behind exposed hardware prevent contact with body during "hot" situations.

Equipped with



ULTRA-SOFT EDGING -

Moves with you. Doesn't rub or chafe.

ARC FLASH RATED

Tested to perform in accordance with ASTM F887-11 standard for personal climbing equipment.

ARC FLASH HYBRID PADDING

Lightweight shoulder, hip and leg padding always keeps the wearer comfortable.

MOLDED LANYARD KEEPERS

Easy holstered lanyard hooks break away to avoid trip hazard.

- REFLECTIVE MATERIAL

Integrated on legs, chest, shoulders and back for greater visibility and safety.

BUILT-IN CARRYING POCKET

Conveniently holds a cell phone, camera or other items.

DUO-LOK™ QUICK Connect Buckles

Lightweight aluminum, one-handed use with memory fit web lock ensures fast, non-slipping connections.

STAND-UP DORSAL D-RING

Non-conductive, extremely lightweight PVC-coated aluminum D-ring is spring loaded for fast and easy connections. Also available in web loop configurations.



EXOFIT NEX™ ARC FLASH

VEST-STYLE FULL BODY HARNESSES



1113338

EXOFIT NEX™ ARC FLASH HARNESS

Nomex[®]/Kevlar[®] web. PVC coated aluminum back D-ring, coated pass-thru buckles, comfort padding (XLarge)

1113335 Small

1113336 Medium

1113337 Large



1103073

EXOFIT NEX™ ARC FLASH POSITIONING HARNESS

Nomex[®]/Kevlar[®] web. PVC coated aluminum back and side D-rings, locking quick connect buckles, comfort padding. (XLarge)

1103070 Small

1103071 Medium

1103072 Large



EXOFIT™ ARC FLASH HARNESS

Nomex®/Kevlar® web, PVC coated aluminum back D-ring, locking quick connect buckles, comfort padding. (XLarge)

1103085 Small

1103086 Medium

1103087 Large



1113333

EXOFIT NEX™ ARC FLASH **CLIMBING HARNESS**

Nomex®/Kevlar® web, PVC coated aluminum front, back and side D-rings. locking quick connect buckles, comfort padding. (XLarge)

1113330 Small

1113331 Medium

1113332 Large



1113328

EXOFIT NEX™ ARC FLASH RESCUE HARNESS

Nomex®/Kevlar® web. dorsal web loop and front rescue loops, locking quick connect buckles, comfort padding. (XLarge)

1113325 Small

1113326 Medium

1113327 Large

EXOFIT NEX™

ARC FLASH

CONSTRUCTION STYLE HARNESSES

With integrated hip pad and body belt, these harnesses have excellent tool-carrying capabilities, allow work positioning and provide added back support.



1113318

EXOFIT NEX™ ARC FLASH CONSTRUCTION HARNESS

Nomex[®]/Kevlar[®]web. **PVC** coated aluminum back and side D-rings, locking quick connect buckles, sewn-in hip pad and belt, comfort padding. (XLarge) 1113315 Small

1113316 Medium

1113317 Large



1113323

EXOFIT NEX™ ARC FLASH CONSTRUCTION **HARNESS**

Nomex®/Kevlar®web. dorsal web loop, front rescue loops and PVC coated side D-rings, locking quick connect buckles, sewn-in hip pad and belt, comfort padding. (XLarge) 1113320 Small

1113321 Medium

SALA

EXOFIT™ XP

The Second Generation Full Body Comfort Harnesses

ExoFit™ XP made its mark as the industry's most comfortable harness. Its design incorporates a single piece of material that wraps around you in the shape of an X, for the ultimate in no-tangle donning and comfortable security. Its padding can be removed and cleaned. XP materials are soft and lightweight, yet extremely durable.

EASY-GRIP END TABS AND KEEPERS =

For fast, efficient and secure web adjustment.



REMOVABLE PADDING

Cleaning is easy. Just throw it in the washer.

CUSHIONED LEG AND HIP STRAPS

Comfort and additional security during a fall.

QUICK CONNECT BUCKLES

Color-coded and provide one-handed operation for fast, easy donning.

ULTRA-SOFT EDGING

Moves with you. Doesn't rub or chafe.

Equipped with



CUSHIONED SHOULDER PADS

Keeps pressure off, absorbs shock, helps distribute weight in a fall. Designed so they won't slip or slide off your shoulder.

REFLECTIVE PIPING

Enhances visibility in low-light conditions.

INTEGRATED LANYARD KEEPERS

Prevent dangerous entanglements. They snap free when snagged.

SOFT. LIGHTWEIGHT WEBBING

Strong, yet isn't stiff or coarse.

3-D MESH AND BREATHABLE LINING

Allows moisture to evaporate and cool air to circulate, keeping you cool and dry.



STAND-UP DORSAL D-RING WITH IMPACT INDICATOR

It's spring-loaded, ensuring fast, easy and safe connections to a lanyard or SRL.



CAPACITY

Madal Shawn

420 LB.

Model Shown 1110103

SUPERIOR X-DESIGN

A single piece of material in the shape of an X wraps around the wearer for the ultimate in comfort, security and no-tangle donning.



EXOFIT™ XP

VEST-STYLE FULL BODY HARNESSES

Vest-style harnesses are the most universal, with multiple configurations and connection point options. They're used across a wide variety of industries.



1110228

EXOFIT™ XP VEST-STYLE HARNESS

Back and side D-rings, loops for belt, quick connect buckles. (XLarge)

1110225 Small

1110226 Medium

1110227 Large



1110128

EXOFIT™ XP VEST-STYLE HARNESS

Back D-ring, loops for belt, tongue buckle legs. (XLarge)

1110125 Small





1109728

EXOFIT™ XP VEST-STYLE HARNESS

Front and back D-rings. loops for belt, quick connect buckles. (XLarge)

1109725 Small

1109726 Medium

1109727 Large



1109753

EXOFIT™ XP VEST-STYLE HARNESS

Front, back and side D-rings, loops for belt, quick connect buckles. (XLarge)

1109750 Small

1109751 Medium

1109752 Large

EXOFIT™ XP **CROSS-OVER STYLE HARNESSES**

1110103

buckles. (XLarge)

1110100 Small

1110101 Medium

1110102 Large

EXOFIT™ XP VEST-STYLE HARNESS

Back D-ring, loops for belt, quick connect

A front-mounted D-ring makes the cross-over style ideal for ladder climbing and rescue applications.



1109803

EXOFIT™ XP CROSS-OVER STYLE HARNESS

Front and back D-rings, loops for belt, quick connect buckles. (XLarge)

1109800 Small

1109801 Medium

1109802 Large



1110353

EXOFIT™ XP CROSS-OVER STYLE HARNESS

Back, front, and side D-rings, sewn-in hip pad and hip adjustments. (XLarge)

1110350 Small

1110351 Medium

FULL BODY HARNESSES

EXOFIT

EXOFIT[™] XP

CONSTRUCTION STYLE HARNESSES Made for general construction work, these harnesses have excellent tool-carrying capability, a sewn-in hip pad and removable body belt.



1110153

EXOFIT™ XP CONSTRUCTION STYLE HARNESS

Back D-ring, sewn-in back pad and belt with side D-rings, quick connect buckles. (XLarge)

1110150 SM 1110151 MED 1110152 LG



1110178

EXOFIT™ XP CONSTRUCTION STYLE HARNESS

Back D-ring, sewn-in back pad and belt with side D-rings, tongue buckle legs. (XLarge)

1110175 SM 1110176 MED 1110177 LG





Dorsal web loop option for no metal connections

7,000 lb. Nylon or Nomex®/Kevlar® webbing options to meet your different jobsite needs

Flame resistant Nomex®/Kevlar® fabric used in back, hip and leg pads

Leather insulator option behind metal hardware reduces static energy transfer

 PVC coated hardware option for non-conductive, non-sparking applications

EXOFIT™ XP **ARC FLASH HARNESSES**

XP arc flash harnesses are perfect for use in any industry where high voltage electricity is a concern. That's because all DBI-SALA® arc flash equipment has been tested to perform in accordance with the stringent ASTM F887-11 Standard Specification for Personal Climbing Equipment.

Testing for fall protection is performed in two steps. The first exposes the equipment to an arc flash at 40 cal/cm² and the second is a drop test compliant with ANSI Z359.1 after the exposure.



EXOFIT™ XP ARC FLASH HARNESS

Removable Nomex®/Kevlar® padding, 7,000 lb. nylon web, back web loop, quick connect buckles, back and leg Nomex®/Kevlar® pads, leather insulators, rescue loops. (XLarge) 1110964 SM, 1110840 MED, 1110841 LG



1110892

FXNFIT™ XP ARC FLASH HARNESS

Nomex®/Kevlar® webbing. PVC-coated hardware, pass-thru buckles, back and leg Nomex®/Kevlar® pads. (XLarge)

1110893 Small

1110890 Medium

1110891 Large

EXOFIT XP™ ARC FLASH HARNESSES

X-LARGE SMALL MEDIUM LARGE 1100942 1100943 1100940 1100941 Nomex®/Kevlar® web, vest-style, back D-ring, Nomex®/Kevlar® back and leg pads, quick connect buckles.

1110845 1110849 1110843 1110844

Removable Nomex®/Kevlar® padding, 7,000 lb. nylon web, quick connect buckles, rescue loops, leather insulators, PVC coated back D-ring.

1110872 1110873 1110870 1110871

Cross-over style, removable Nomex®/Kevlar® padding, 7000 lb. nylon web, front and back web loop, quick connect buckles, leather insulators.

1110882 1110883 1110880 1110881

Construction style, Nomex®/Kevlar® web and pads, back web loop, quick connect buckles, Kevlar® pass-thru body belt.

1111303 1111300 1111301 1111302

Construction style, Nomex®/Kevlar® web and pads, PVC coated back D-ring, quick connect buckles, Kevlar® pass thru body belt.



1110852

EXOFIT™ XP CONSTRUCTION ARC FLASH HARNESS

Removable Nomex®/Kevlar® padding, 7,000 lb. nylon web, back web loop, quick connect buckles. leather insulators, rescue loops and body belt. (XLarge) 1110853 Small

1110850 Medium



The Industry's First Comfort Harnesses

ExoFit is the design that changed what workers expect from a harness.

It's our original comfort fit harness, with a single piece of material that wraps around you in the shape of an X. It dons without tangling and provides comfortable security. ExoFit remembers your adjustments. Snap three buckles and you're ready to work. Shoulder, hip and leg padding is built-in so it can't slip. A breathable lining guarantees you'll stay dry and comfortable.

ULTRA-SOFT EDGING -

Moves with you. Doesn't rub or chafe.

TORSO BUCKLES

Hold straps firmly in place, adjust easily and complete the 5-point adjustment system.

CUSHIONED LEG AND HIP STRAPS

Comfortable and offer additional security during a fall.

QUICK CONNECT BUCKLES -

Provide one-handed operation for fast, easy donning.

Equipped with

32



CUSHIONED SHOULDER PADS

Help minimize pressure on shoulders. Designed so they won't slip or slide off your shoulder.

BREATHABLE LINING

Immediately draws moisture away, keeping you dry and comfortable.

420 LB. CAPACITY

EASY-GRIP END TABS

Something secure to hang on to when adjusting the straps.

ANTI-TEAR BALLISTIC NYLON

Abrasion-resistant for rugged strength and durability. Twice the endurance of standard nylon or polyester.

REFLECTIVE PIPING

Enhances visibility in low light conditions.

Keeps you upright every time. 5,000 lb. minimum tensile strength.



Model Shown 1107981















EXOFIT[™]

Vest-style harnesses are the most universal, with multiple configurations and connection point options. They're used across a wide variety of industries.



1108581

EXOFIT™ VEST-STYLE HARNESS

Back and side D-rings, loops for belt, quick connect buckles. (XLarge)

1108575 Small 1108576 Medium



1109358

EXOFIT™ **VEST-STYLE HARNESS**

Back D-ring, loops for belt, tongue buckle legs. (XLarge)

1109355 Small

1109356 Medium

1109357 Large



1108532

EXOFIT™ VEST-STYLE HARNESS

Front and back D-rings, loops for belt, quick connect buckles. (XLarge)

1108525 Small

1108526 Medium

1108527 Large



1108606

EXOFIT™ **VEST-STYLE HARNESS**

Front, back and side D-rings, loops for belt, quick connect buckles. (XLarge)

1108600 Small

1108601 Medium

1108602 Large

1107981

EXOFIT™ VEST-STYLE HARNESS

Back D-ring, loops for belt, quick connect buckles. (XLarge)

1107975 Small

1107976 Medium

1107977 Large

EXOFIT ™ VEST-STYLE HARNESSES					
X-LARGE	SMALL	MEDIUM	LARGE		
1108754	1108751	1108752	1108753		
	Back and s	houlder D-ring	gs, loops for belt, quick connect buckles.		
1109226	1109228	1109225	1109229		
	Back, side and shoulder D-rings, loops for belt, quick connect buckles.				
1111428	1111425	1111426	1111427		
	Stainless s	teel hardware.	back D-rings, loops for belt, quick connect buckles.		

EXOFIT™ **CROSS-OVER STYLE HARNESSES**

A front-mounted D-ring makes the cross-over style ideal for ladder climbing and rescue applications.



1108682 **EXOFIT™ CROSS-OVER**

Front and back D-rings, loops for belt, quick connect buckles.

STYLE HARNESS

(XLarge)

1108675 Small

1108676 Medium

1108677 Large



1108706 **EXOFIT™ CROSS-OVER STYLE HARNESS**

Front, back and side D-rings, loops for belt, quick connect buckles.

(XLarge)

1108700 Small

1108701 Medium

FULL BODY HARNESSES

EXOFIT™

CONSTRUCTION STYLE HARNESSES

Made for general construction work, these harnesses have excellent tool-carrying capability, a sewn-in hip pad and removable body belt.



Back D-ring, sewn-in back pad and belt with side D-rings, quick connect buckles. (XLarge)

1108500 Small

1108507

STYLE HARNESS

1108501 Medium

1108502 Large





1110478 **EXOFIT™ CONSTRUCTION STYLE HARNESS**

Back D-rings, sewn in hip pad and belt with side D-rings, tongue buckle legs. (XLarge)

1110475 Small

1110476 Medium

1110477 Large

EXOFIT TO CONSTRUCTION STYLE HARNESSES

X-LARGE **SMALL MEDIUM** LARGE 1108979 1108977 1108978 1108975 Back and front D-ring, sewn-in back pad and belt with side D-rings, quick connect buckles.

1108519 1108516 1108517 1108518

> Back D-ring, sewn-in back pad and belt with side D-rings, quick connect buckles, 9504066 and 9504072 tool pouches.



1100303

EXOFIT™ DERRICK HARNESS

Vest-style, back D-ring with 18" extension, belt with back pad and back D-ring, soft seat sling with positioning D-rings, pass-thru buckle connections at shoulder for 1000570 derrick belt. (XLarge)

1100300 Small 1100301 Medium 1100302 Large

Harness at left pictured with 1000570 derrick belt



EXOFIT™ DERRICK BELT

Positioning D-rings, pass thru buckles for harness connection. (Universal Size)

EXOFIT™

WIND ENERGY HARNESSES

Our wind industry harnesses meet global compliance standards: ANSI, OSHA, CSA and CE.



Reinforced lumbar area for added back support. Tool loops allow you to keep your tools close at hand.



Integrated trauma straps minimize suspension trauma after a fall.

1102388

EXOFIT™WIND ENERGY HARNESS

Quick connect buckle legs, PVC coated front, back and side D-rings, sewn-in hip pad and belt with tool loops. (XLarge)

1102385 Small

1102386 Medium

1102387 Large



1102343

EXOFIT™ WIND ENERGY HARNESS

FULL BODY HARNESSES

Quick connect buckle legs, PVC coated front, back and side D-rings. (XLarge)

1102340 Small

1102341 Medium

1102342 Large

1108657 EXOFIT™ TOWER CLIMBING HARNESS

Front and back D-rings, belt with back pad and side D-rings, removable seat sling with positioning D-rings, quick connect buckles. (XLarge)

1108650 Small 1108651 Medium

1108652 Large



Excellent tool-carrying capability. Extra tough tubular web encases sub-pelvic webbing for added wear resistance for straddling beams.

1100533

EXOFIT™ IRON WORKER'S HARNESS

Back D-ring, sewn-in back pad and belt with side D-rings, reinforced seat straps, tongue buckle legs. (XLarge)

1100530 Small

1100531 Medium



Innovative, full body support for more than two decades.

New, improved Delta™ harnesses combine "industry-first" advancements with popular features that have made Delta™ the workhorse of the industry. Today's Delta™ represents more than twenty years of design, research, manufacturing know-how and on-the-job performance.

Durable - Convenient - Comfortable

Delta™ harnesses are as tough as those who wear them. They have a shape of their own so you can don them quickly and easily. And Delta™ supports your back and hips while bearing heavy loads.

NO TANGLE DESIGN

Defining the Delta™ name, the patented triangular design creates a frame that allows the harness to fall into place when donned.

DELTA™ COMFORT HIP PAD

Improved ergonomic fit constructed with a soft, breathable, comfortable interior that supports your back and hips.

TECH-LITE™ QUICK CONNECT BUCKLES

Lightweight aluminum alloy buckles for fast and easy connections.

Equipped with



REPEL™ WEBBING

Water repellent to reduce attraction of mold and dirt—also has more abrasion resistance.

- LANYARD KEEPERS

Delta™ lanyard keepers hold your unused snap hooks and help reduce trip hazards.



REVOLVER™ VERTICAI Torso adjuster

Simple and fast adjustment that eliminates loose ends and locks into place, preventing slippage.

STAND-UP Dorsal D-Ring

Patented spring-loaded design automatically stands-up, ensuring fast, easy and safe connections to your fall arrest system.

420 LB.

Model Shown 1101656

IMPACT INDICATOR •

Provides visual alert that the harness has been involved in a fall and for safety inspections.



Vest-style harnesses are the most universal, with multiple configurations and connection point options. They're used across a wide variety of industries.



1102008

$\mathbf{DELTA}^{\mathsf{TM}}$ **VEST-STYLE HARNESS**

Side and back D-ring, tongue buckle leg straps. (Universal Size) 1102008 (pictured) Tongue Buckles 1110625 **Quick Connect Buckles**

1103875 Pass-Thru Buckles



1102090

$DELTA^{TM}$ **VEST-STYLE HARNESS**

Back and front D-rings, quick connect buckles. (Universal Size) 1102090 (pictured) **Quick Connect Buckles** 1107807 **Tongue Buckles**

1112126

Pass-Thru Buckles



DELTA™ VEST-STYLE HARNESS

Back D-ring, tongue buckle leg straps. (Universal Size)

1102000 Tongue Buckles (pictured)

1110600 Quick Connect Buckles

1103321 Pass-Thru Buckles



1101781

DELTA™ **VEST-STYLE HARNESS**

Back and shoulder D-rings, pass thru buckles. (Universal Size)

1101781 (pictured) Pass-Thru Buckles

1101254 **Tongue Buckles**

1110602

Quick Connect Buckles

DELTA™ VEST-STYLE HARNESSES

1107813 Front and back D-rings, Hi-Vis web, loops for belt, quick connect buckles. (XLarge) (1107804 LG)

1102001 Back D-rings, parachute adjuster leg straps. (Universal Size)

1101828 Back D-rings, parachute adjuster leg straps, shoulder retrieval D-rings. (Universal Size)

1105400 Back and side D-rings, parachute adjuster leg straps. (Universal Size)

1104725 Back D-ring, with belt loops, non-conduct/sparking hardware, pass-thru buckle leg straps. (Universal Size)



FULL BODY HARNESSES



DELTA

CONSTRUCTION STYLE HARNESSES

Made for general construction work, these harnesses have excellent tool-carrying capability, a sewn-in hip pad and removable body belt.



1101656

DELTA™ CONSTRUCTION STYLE HARNESS

Vest-style, back and side D-rings, belt with sewn-in back and shoulder pads. tongue buckle leg straps. (XLarge)

1102201 Small

1101654 Medium

1101655 Large

1110578

DELTA™ CONSTRUCTION STYLE HARNESS

Back and side D-rings, quick connect buckle legs and chest strap, belt with sewn-in back pad. (XLarge)

1110575 Small

1110576 Medium

1110577 Large

DELTA™ CONSTRUCTION STYLE HARNESSES

1107809 Front, back and side D-rings, belt and hip pad, tongue buckle leg. 1107805 SM 1107802 MED 1107801 LG 1107809 XL

1103513 Back D-ring, pass-thru buckles, loops for belt. (Universal Size)

1103512 Back and side D-rings, pass-thru buckles, loop for belt. (Universal Size)

1102526 Back D-ring, tongue buckle legs, loops for belt. (Universal Size)

1102025 Back and side D-rings, tongue buckle legs, loops for belt. (Universal Size)

DELTA

CROSS-OVER STYLE HARNESSES

A front-mounted D-ring makes the cross-over style ideal for ladder climbing and rescue applications.



1102950

DELTA™ CROSS-OVER STYLE HARNESS

Back and front D-rings. tongue buckles legs. (Universal Size) 1102950 (pictured)

Tongue Buckles

1110700 **Quick Connect Buckles**

1102010 Pass-Thru Buckles

DELTA™ CROSS-OVER STYLE HARNESSES

1101812 CONSTRUCTION STYLE CROSS-OVER HARNESS

Front and back D-rings, pass-thru legs, belt and hip pad with side D-rings. (XLarge) 1101809 SM 1101810 MED 1101811 LG



1110725

DELTA™ CROSS-OVER STYLE HARNESS

D-rings, quick connect buckles. (Universal Size)

1110725 (pictured) **Quick Connect Buckles**

1103375 **Tongue Buckles**

1103270

Pass-Thru Buckles



1106452 (pictured)

DELTA™ IRON WORKER'S HARNESS

Vest-style, back D-ring, adjustable belt support straps with clips, body belt with permanently attached pad, shoulder pads, accessory clips, wear layer web on seat sling, pass thru leg straps. (XLarge)

1106453 SM 1106451 MED 1106550 LG

1106408

DELTA™ IRON WORKER HARNESS

Vest-style, back D-ring adjustable belt support straps with clips, body belt with permanently attached pad, shoulder pads, accessory clips, wear layer web on seat sling, tongue buckle leg straps. (XLarge) 1106403 SM 1106404 MED 1106405 LG



1107778 (pictured)

DELTA™ TOWER CLIMBING HARNESS

Vest-style, front and back D-ring belt with 4" wide pad and side D-rings, two tool pouch D-rings, seat sling with positioning D-rings, tongue buckle legs. (XLarge)

1107776 SM 1107777 MED 1107775 LG

1103352

DELTA™ TOWER CLIMBING HARNESS

Cross-over style, front D-ring, belt with 4" wide pad and side D-rings, two tool pouch D-rings, seat sling with positioning D-rings, tongue buckle legs. (XLarge)

1103355 SM 1103351 MED 1103350 LG

DELTA ARC FLASH HARNESSES

Arc flash harnesses are perfect for use in any industry where high voltage electricity is a concern. That's because all DBI-SALA® arc flash equipment has been tested to perform in accordance with the stringent ASTM F887-05 Standard Specification for Personal Climbing Equipment.



1110752

DELTA™ ARC FLASH HARNESS

7,000 lb. nylon web, no metal above the waist, front and back web loop, pass-thru buckle legs, leather insulators. (XLarge) 1110754 SM 1110750 MED 1110751 LG



1110782

DELTA™ ARC FLASH HARNESS

7,000 lb. nylon web, back web loop, quick connect buckles, leather insulators, rescue loops. (XLarge)

1110788 Small

1110780 Medium

1110781 Large



1110830

DELTA™ ARC **FLASH HARNESS**

Nomex®/Kevlar® web. PVC coated hardware, back D-ring, pass-thru leg straps. (Universal Size)



1110812

DELTA™ ARC **FLASH HARNESS**

Nomex®/Kevlar® web. no metal above the waist, front and back web loop, quick connect buckle legs, leather insulators. (XLarge)

1110815 Small

1110810 Medium

1110811 Large



1110802

DELTA™ ARC **FLASH HARNESS**

Nomex®/Kevlar® web. construction style, back web loop, quick connect buckles. pass-thru belt/hip pad with side D-rings. (XLarge)

1110803 Small

1110800 Medium

1110801 Large

DELTA™ ARC FLASH HARNESSES

1110790 7,000 lb. nylon web, vest-style, PVC coated hardware, back D-ring, pass-thru buckles. (Universal Size)

1110820 Nomex®/Kevlar® web, vest-style, back web loop, quick connect buckles. (Universal Size)

1110940 Nomex®/Kevlar® web, cross-over style, PVC coated hardware, front, back and side D-rings. (Universal Size)

1102005 7,000 lb. nylon with coated hardware, one front rescue loop, pass-thru buckles. (XLarge) 1102002 SM 1102003 MED 1102004 LG

DELTA™ ARC FLASH KITS

1150054 Includes 1110751 Delta[™] arc flash nylon harness with web loop and 1240861 arc flash shock absorbing lanyard, 6', with bag. (Large)

1150058 Includes 1110752 Delta[™] arc flash nylon harness with web loop and 1240861 arc flash shock absorbing lanyard, 6', with bag. (XLarge)



1111580

DELTA VEST™ HI-VIS REFLECTIVE HARNESS

Orange workvest-style harness, reflective, back D-ring, quick connect legs. (Universal Size)

DELTA VEST™

HI-VIS REFLECTIVE AND NON-REFLECTIVE WORKVEST HARNESSES

Sleeveless waist-length vest with harness built-in for high visibility, day or night. Meets ANSI class II requirements for high visibility vests.



1111584 **DELTA VEST™ HI-VIS**

REFLECTIVE HARNESS

Yellow workvest-style harness, reflective, back D-ring, quick connect legs. (Universal Size)



1111576

DELTA VEST™

Cotton blue workvest-style harness, non-reflective, back D-ring, quick connect legs. (Universal Size)

DELTA™ HI-VIS REFLECTIVE AND NON-REFLECTIVE HARNESSES

1107404 Hi visibility orange workvest-style harness, reflective, back D-ring, tongue buckle legs. (Universal Size)

1107420 Hi visibility yellow workvest-style harness, reflective, back D-ring, tongue buckle legs. (Universal Size)

Blue cotton workvest-style harness, non-reflective, back D-ring, tongue buckle legs. (Universal Size)



DELTA NOMEX°/KEVLAR°

WELDERS' HARNESSES

1107416

1105475

Vest-style, Nomex®/Kevlar® conductive/spark hardware, pass thru buckle leg straps,

DELTA™ NOMEX®/KEVLAR® HARNESSES

web, back D-ring, with nonloops for belt. (Universal Size)

DELTA™ NOMEX*/KEVLAR* HARNESSES

1104625 Vest-style, back D-ring, pass thru buckle leg stra (Universal Size)	s, loops for belt.
---	--------------------

1109975 Vest-style, back D-ring, quick connect buckles, loops for belt. (Universal Size)

1104775 Cross-over style, front, back and side D-rings, pass thru buckle leg straps, loops for belt. (Universal Size)



DELTA[™] RESIST WEBBING HARNESSES

RESIST technology (polyurethane coated webbing) provides protection against grease, oil, dirt and grime.

1110990 **DELTA RESIST** WEBBING HARNESS

Vest-style, back D-ring, tongue buckle legs. (Universal Size)





DELTA

OIL AND DERRICK HARNESSES

These harnesses are designed specifically for workers who operate the monkey and tubing boards on oil rigs. They feature comfort and security, with easy donning. These models include connections for an optional derrick belt, which provides comfort while positioning for the next drilling pipe.

Harnesses shown with derrick belt.



DELTA™ DERRICK HARNESS

Back and lifting D-rings, tongue buckle legs and connection to 1003222 derrick belt. (XLarge)

1106357 Small

1106350 Medium

1106353 Large

1003222

DERRICK BELT Work positioning rings, tongue buckle belt. (XLarge) 1003220 SM/MED, 1003221 LG



1106107

DELTA™ DERRICK HARNESS

18" dorsal D-ring extension, belt and hip pad with back D-ring, seat sling, tongue buckle legs, pass-thru connection to 1000570 derrick belt.

1106112 Small

1106108 Medium

1106106 Large



1000570

DERRICK BELT Work positioning rings, pass thru buckle connection.



DELTA™ DERRICK HARNESS

Back, side D-rings, tongue buckle legs, use with 1000545 derrick belt. (XLarge)

1105826 Small

1105827 Medium

1105825 Large

1000545

DERRICK BELT Work positioning rings, pass-thru buckle connection. (XLarge)

1000542 SM, 1000543 MED, 1000544 LG





Built-in seat board for added support.

1108128

DELTA™ BOSUN CHAIR HARNESS

Front and back D-ring with 18" dorsal D-ring extension, tongue buckle belt/pad and side D-rings, seat sling with rigid seat board. (X Large)

1108126 SM 1108127 MED 1108125 LG



DELTA™ OIL AND DERRICK HARNESSES

1106103 18" dorsal D-ring extension, belt and hip pad with back D-ring, seat sling, tongue buckle legs. (XLarge)

1106100 SM 1106101 MED 1106102 LG

1104801 Back and lifting D-rings, tongue buckle legs and straps for connection to 1000555 derrick belt. (XLarge)

1104803 SM 1104804 MED 1104800 LG

BOSUN CHAIR HARNESS

1108103 Front, back and side D-rings with added 18" extension, tongue buckle belt/pad and side D-rings, with soft 8" wide seat sling. (XLarge)

1108101 SM 1108102 MED 1108100 LG

BODY BELTS AND WORKSEATS

LINEMAN'S BELTS



1000663

LINEMAN'S BELT

5 3/4" back pad, side D-rings, tape thong, 2 leather tabs for pouches, 4 leather tool accessory snap and ring. D-size = D23 (57.5 cm). D20-D29 available.

1000664 = D24 (61 cm)1000665 = D25 (63.5 cm)

1000673

LINEMAN'S BELT 7-9" back pad (depending on D) side D-rings, tape thong, 2 leather tabs for pouches, 4 leather tool loops, accessory snap and ring. D-size = D23 (57.5 cm). D20-D29 available.

1000674 = D24 (61cm)1000675 = D25 (63.5cm)



WORKSEATS



Bosun chair, 12" x 24" x 1" board, cushion and side snaps.

1001140

Bosun chair only, 12" x 24" x 1" board.

1001005

Work seat with board, tongue buckle belt and pad, suspension D-rings, adjustable leg/shoulder strap. (XLarge) 1001001 XSM 1001002 SM 1001003 MED 1001004 LG

1001090

Harness accessory, seat sling, 8" wide, belt attachment loops and D-rings.

TONGUE BUCKLE BELTS

1000025

Tongue buckle belt, side D-rings, 3" pad. (XLarge)

1000021 XSM 1000022 SM 1000023 MED 1000024 LG

1000055

Delta tongue buckle belt, no D-ring, no pad. (XLarge) 1000051 XSM 1000052 SM 1000053 MED 1000054 LG



1000005 Tongue buckle belt, back D-ring, 3" pad. (XLarge) 1000001 XSM 1000002 SM 1000003 MED 1000004 LG

1000165 Tongue buckle belt, with floating D-ring, no pad. (XLarge) 1000161 $\,$ XSM 1000162 $\,$ SM 1000163 $\,$ MED 1000164 $\,$ LG

1000616 Tongue buckle belt, with back D-ring, no pad. (XLarge) 1000612 XSM 1000613 SM 1000614 MED 1000615 LG

1000717 ExoFit[™] tongue buckle belt, no D-ring, no pad. (XLarge) 1000708 SM 1000709 MED 1000716 LG

CUSTOMIZE YOUR HARNESSES

DBI-SALA® can put a custom label on your harnesses, or group of harnesses, with an order of 12 or more.

- Same style of harness required, order can be in multiple sizes.
- One logo per harness.
- Logos on Delta™ harnesses—black on clear background, sublimation transferred.
- Logos on ExoFit[™] and ExoFit[™] XP—black on white background, heat transferred and sewn.
- Logos on ExoFit NEX[™] harnesses—custom logo and embroidery, multiple colors to choose from.







HARNESS ACCESSORIES



SUSPENSION TRAUMA SAFETY STRAPS

They are deployed when needed, hook together in seconds and let a suspended worker stand up in harness, relieving downward pressure. The continuous loop design allows for one- or two-foot suspension. You can quickly attach them to most harness brands right in the field. The compact, lightweight design stays out of your way.

9501403

SUSPENSION TRAUMA SAFETY STRAPS

One pair, connects to most harnesses.



FLAME RESISTANT SUSPENSION TRAUMA SAFETY STRAPS

One pair, connects to most harnesses.

1150174

HARNESS HYDRATION SYSTEM 50 oz. capacity, compatible with all

DBI-SALA® harnesses.



9500468

OFF-SHORE LIFEJACKET

Off-shore orange life vest, back opening for harness, safety whistle, 62 sq. inches of Solas grade reflective tape, foamfilled head support collar with two vertical adjustable straps, hinged back panel for comfort, universal size. Cat. No: 1600 type 1-US Coast Guard Approved.



9504066

11-POCKET CONSTRUCTION POUCH

9504072

15-POCKET CONSTRUCTION POUCH

9501264

DBI-SALA® CELL PHONE HOLDER



9505494

PERSONAL RADIO SLEEVE

Carrying holster for personal radio or Lad-Saf™ sleeve.



9511597

HARNESS AND LANYARD BAG

DBI-SALA® bag 7-1/2" wide x 6-1/2" deep x 15-1/2" long, holds a harness and lanyard or 50 ft. of 5/8" rope.



9505504 SM, MED **9505515** LG, XL, XXL

LUMBAR WEAR PADS

Removable lumbar wear pad for ExoFit NEX™ wind energy harness belt.

TOOL LANYARDS: Tether tools to prevent injury, damage and lost productivity from dropped items.

1150914

TOOL LANYARD, SINGLE CARABINER WITH CHOKER

Extends from 42" to 50" and prevents tools from falling. Holds up to 15 lb. (6.8 kg) tool capacity. Simply choke off to any harness or belt. (Tool not included.)



1150915

DOUBLE CARABINER

15 lb. (6.8 kg) capacity



1150916

DOUBLE CARABINER

30 lb. (13.6 kg) capacity



1150917

TWIN-LEG TRIPLE CARABINER

30 lb. (13.6 kg) capacity





1150037

DORSAL WEB COVER

Helps protect dorsal webbing on harness while climbing or descending a ladder such as in wind turbine towers.



9504374

ATTACHMENT BREAKAWAY LANYARD KEEPER

Plastic ring with velcro used to "park" lanyard when not in use.



9502006

FOAM SHOULDER PAD

Sold one each, two required per harness.



1231117

D-RING EXTENSION

D-ring at one end, snap hook at other x 18" (46 cm).




9501207

DELTA™ COMFORT PAD

Attaches to most harnesses to provide wrap-around comfort.



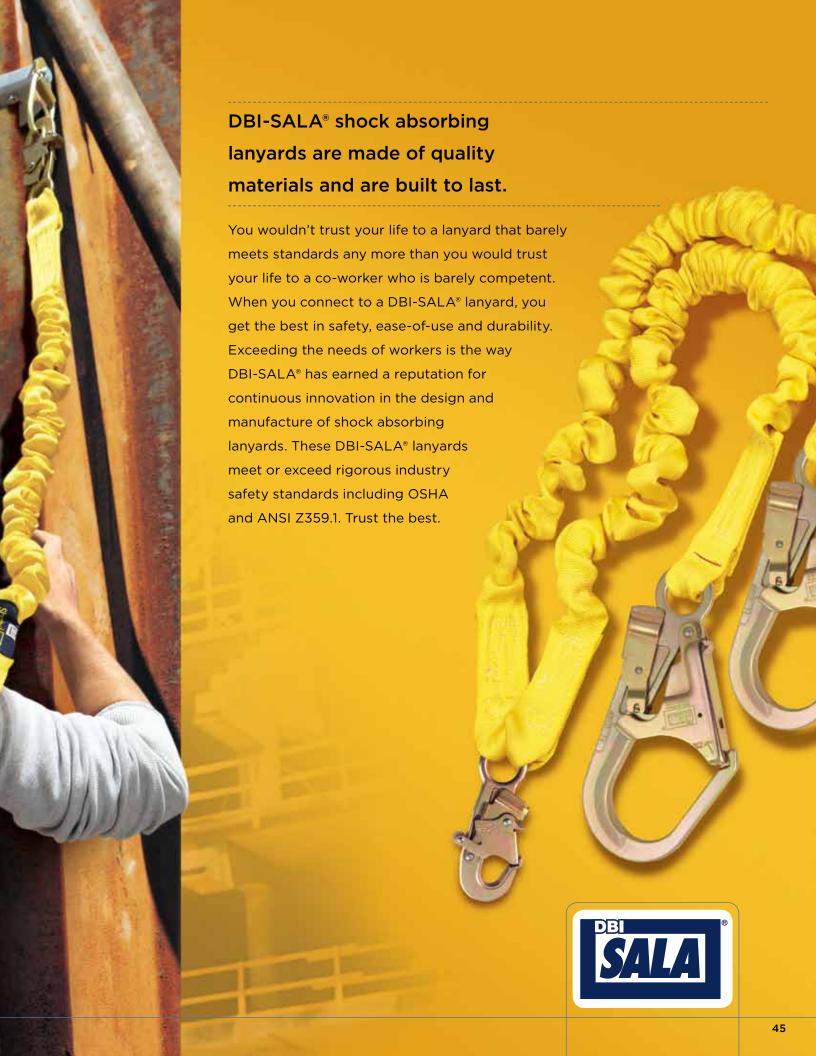

CHOOSING A LANYARD

Look for quality in these features when selecting a lanyard.

1 WEBBING

Webbing must be strong enough to endure rough use and exposure to sunlight and other elements, without tearing or fraying. Nomex®/Kevlar® webbing should be used for applications such as welding or arc flash hazards. Webbing may also be coated with polyurethane for protection against grease, oil and grime. Cable lanyards offer extra durability and are ideal if you're working in abrasive or high-heat environments.

2 IMPACT INDICATORS

Impact indicators let you see if a shock absorber has been involved in a fall. Once an energy absorber has been deployed, the lanyard must be removed from service immediately and destroyed.

3 CONNECTOR/HOOK

DBI-SALA® patented snap hooks are popular because they allow one-handed use and won't pinch your thumbs or fingers.

Lanyards can also be fitted with larger hooks or carabiners, for connection to larger anchorages.





PACK STYLE SHOCK ABSORBING LANYARDS

These basic lanyards include a pack style shock absorber and offer a variety of leg types (web, cable, Kevlar®). They dissipate energy, limiting the forces on your body during a fall.



TUBULAR STYLE SHOCK ABSORBING LANYARDS

These lanyards feature an internal shock absorber that dissipates the energy of a fall. This style is available in both a traditional fixed length design and a "stretch" style that expands and contracts.



DOUBLE-LEG 100% TIE-OFF LANYARDS

Two lanyards that are connected at one end. This style of lanyard is used to provide 100% tie-off, allowing you to stay protected when moving from one location to another.



POSITIONING LANYARDS

Lanyards without shock absorbers, such as rope or web lanyards and chain rebar assemblies, are designed for positioning or restraint applications.



4 LENGTH

The standard lanyard length is 6 ft. (1.8 m), but both shorter and longer length lanyards are available. A lanyard should be long enough to be user-friendly, but kept as short as possible to minimize the free fall distance.

5 SHOCK ABSORBER

Lanyards used as part of a personal fall arrest system must contain an energy absorbing unit that limits fall arrest forces during a fall to less than 1,800 lbs. (8kN). Most designs keep forces below 900 lbs. (4kN) for added safety. Shock absorbers come in pack or tubular styles depending on your preference.

Equipped with



Workers prefer DBI-SALA® snap hooks



One-hand operation makes DBI-SALA® snap hooks the most popular in the industry. You can even operate them with your gloves on. Open and close without getting your fingers in the way!

All DBI-SALA® lanyards feature 3,600 lb. (16kN) rated gates, meeting the rigorous ANSI Z359 standard.

LANYARD HOOK OPTIONS

Standard Hook 3/4" (19 mm) gate opening - 3,600 lb. (16kN) gate strength. Aluminum Rebar Hook 2-1/4" (57 mm) gate opening - 3,600 lb. (16kN) gate strength Flat Steel Rebar Hook 2-1/2" (62.5 mm) gate opening - 3,600 lb. (16kN) gate strength. Saflok Max™ Steel Rebar Hook 3" (76.2 mm) gate opening - 3,600 lb. (16kN) gate strength.





(16kN) gate strength





opening - 3,600 lb. (16kN) gate strength.



Wrapbax™ Hook 3/4" (19 mm) gate opening -5,000 lb. (22kN) gate strength.





opening - 5,000 lb.

(22kN) gate strength.



SPECIALTY LANYARDS



TIE-BACK LANYARDS

When a qualified anchorage connector is not available, a tie-back lanyard acts as both a connecting means and an anchorage connector, reducing inventory and cost.



KEVLAR® LANYARDS

Special material has an 800°F char temperature rating, exceptional cut resistance and is ideal for high temperature environments or those requiring arc flash protection.



LANYARDS FOR TYING OFF AT YOUR FEET

These lanyards can be used at your feet, allowing a 12 ft. (3.7 m) free fall and maintaining forces below 1,800 lbs. (8kN). Also use for 6 ft. (1.8 m) falls for heavier workers up to 420 lbs. (190 kg).



FALL RESTRICTING DEVICE

Unique device cinches around a wood pole during a "cut out" preventing user from falling to the ground and allowing user to regain footing.

SHOCK ABSORBING LANYARDS

Shockwww/ave2

ShockWave[™]2 is uniquely designed to expand and contract (6 ft. to 4-1/2 ft.), in reaction to a worker's movements. The tubular web stays out of your way when not in use, avoiding trips and snags. A built-in impact indicator provides easy visual evidence if the shock has been impact loaded through a fall or improper use. It limits the average fall arresting forces to 900 lbs. (4kN).

1244306

SHOCKWAVE™2 LANYARD

Single-leg with snap hooks at each end x 6 ft. (1.8 m).



1244321

SHOCKWAVE[™]2 LANYARD Single-leg with snap hook and steel rebar hook x 6 ft. (1.8 m).



1244311 Single-leg with snap hook and aluminum rebar hook x 6 ft. (1.8 m).

1244360 Single-leg with snap hook and Saflok Max[™] hook x 6 ft. (1.8 m).

1244406 Double-leg with snap hooks at each end x 6 ft. (1.8 m).

1244412 Double-leg with snap hook and flat steel rebar hooks x 6 ft. (1.8 m).

1244448

SHOCKWAVE™2 100% TIE-OFF LANYARD


Double-leg with snap hook and Saflok Max^{TM} hooks on leg ends x 6 ft. (1.8 m).



1244409

SHOCKWAVE™2 100% TIE-OFF LANYARD

Double-leg with snap hook and aluminum rebar hooks on leg ends x 6 ft. (1.8 m).



SHOCKWAVE™2 SPECIALTY LANYARDS

RESCUE LANYARDS

These lanyards incorporate a built-in D-ring to help facilitate the rescue of a fallen worker.

1244456

SHOCKWAVE™2 RESCUE LANYARD

Double-leg with snap hook and flat steel rebar hooks on leg ends, D-ring for rescue or self retracting lifeline (SRL) attachment x 6 ft. (1.8 m).



1244750

SHOCKWAVE™2 RESCUE LANYARD

Double-leg with snap hook and flat steel rebar hooks on leg ends, integrated rescue D-rings x 6 ft. (1.8 m).



SHOCKWAVE™2 RESCUE LANYARDS

1244455 Double-leg with snap hooks and D-ring for SRL x 6 ft. (1.8 m).

1244459 Double-leg with snap hook and Saflok Max[™] rebar hooks and D-ring for SRL x 6 ft. (1.8 m).

1244751 Double-leg with snap hook and aluminum rebar hooks on leg ends, integrated rescue D-rings x 6 ft. (1.8 m).

WEB LOOP LANYARDS

Simply choke-off to back D-ring or to dorsal web loop. Reduces weight and is ideal for electrical applications where no metal above the waist is preferred.

1244310

SHOCKWAVE™2 Web loop lanyard

Single-leg with snap hook at one end and web loop at the other x 6 ft. (1.8 m).



1244413

SHOCKWAVE™2 WEB LOOP 100% TIE-OFF LANYARD

Double-leg with snap hooks at leg ends and web loop at center x 6 ft. (1.8 m).



NOMEX®/KEVLAR® ARC FLASH LANYARDS

Constructed from unique materials, these lanyards are ideal for high heat environments or for electrical work when arc flash is a concern. Meets arc requirements of ASTM F887-11.

1244610

SHOCKWAVE™2 ARC FLASH LANYARD

Nomex®/Kevlar® single-leg with snap hooks x 6 ft. (1.8 m).



1244611

SHOCKWAVE™2 ARC FLASH LANYARD

Nomex®/Kevlar® single-leg with snap hook and web loop x 6 ft. (1.8 m).



SHOCKWAVE™2 ARC FLASH LANYARD

Nomex®/Kevlar® double-leg with snap hooks x 6 ft. (1.8 m).



1244631

SHOCKWAVE™2 Arc flash lanyard

Nomex®/Kevlar® double-leg with snap hooks at leg ends and web loop at center x 6 ft. (1.8 m).



TIE-BACK LANYARDS

When a qualified anchorage connector is not available, a tie-back lanyard acts as both a connecting means and an anchorage connector.

1244650

SHOCKWAVE™2 TIE-BACK LANYARD

Single-leg with snap hook and 5,000 lb. tie-back carabiner x 6 ft. (1.8 m).



SHOCKWAVE[™]2 100% TIE-OFF TIE-BACK LANYARD

Double-leg with snap hook and 5,000 lb. tie-back carabiners at leg ends x 6 ft. (1.8 m).





5 STOP[™]II SHOCK ABSORBING LANYARDS

EZ-Stop™ II lanyards use a controlled tearing action when subjected to fall arrest forces. They limit the average arresting forces to 900 lbs. (4kN) or less. These lanyards feature 1" polyester web construction (unless specified differently), double locking snap hooks, a durable nylon shock absorber cover and various lengths and hook options to fit your job.



EZ-STOP™II DOUBLE-LEG LANYARDS

1241006 Double-leg with elastic leg and snap hooks at each end x 6 ft. (1.8 m). 1241008 Double-leg with elastic legs, snap hook and aluminum rebar hooks at leg ends x 6 ft. (1.8 m). 1240416 Double-leg with snap hook and aluminum rebar hooks at leg ends x 6 ft. (1.8 m). 1240427 Double-leg with snap hook and flat steel rebar hooks at leg ends x 6 ft. (1.8 m). 1240804 Double-leg with 7/32" vinyl covered cable and snap hooks x 6 ft. (1.8 m).

1240006

EZ-STOP™II LANYARD

Single-leg with snap hooks at each end x 6 ft. (1.8 m).

1240256

EZ-STOP™II **ADJUSTABLE LANYARD**

Single-leg, adjustable length with snap hooks x 6 ft. (1.8 m)



1240706

EZ-STOP™II LANYARD

Single-leg with 7/32" vinyl covered cable and snap hooks x 6 ft. (1.8 m)



1240906

EZ-STOP™II LANYARD

Elastic leg, 1" web, snap hooks at ends, x 6 ft. (1.8 m)



EZ-STOP™II SINGLE-LEG LANYARDS

Single-leg with snap hook and aluminum rebar hook x 6 ft. (1.8 m).

Single-leg with snap hook and Saflok Max[™] hook x 6 ft. (1.8 m).

1240086 Single-leg with snap hook and Saflok[™] steel carabiner x 6 ft. (1.8 m).

1240362

EZ-STOP™II SHOCK ABSORBER

Add in-line to a non-shock absorbing lanyard for fall arrest applications. Snap hook at one end, D-ring at other x 19.5" (50 cm).



EZ-STOP™II SPECIALTY LANYARDS

TIE-BACK LANYARDS

When a qualified anchorage connector is not available, a tie-back lanyard acts as both a connecting means



Single-leg with floating D-ring for tie-back, snap hooks at ends x 6 ft. (1.8m).

1241206 Double-leg with floating D-rings for tie-back, snap hooks at ends x 6 ft. (1.8m).

1241124

EZ-STOP™II TIE-BACK LANYARD

Single-leg with floating D-ring for tie-back, snap hook and aluminum rebar hook x 6 ft. (1.8m).

1241219

Double-leg with floating D-rings for tie-off, snap hook and aluminum rebar hooks at leg ends x 6 ft. (1.8m).

1241220

EZ-STOP™II 100% TIE-OFF **TIE-BACK LANAYRD**

Double-leg with floating D-rings for tie-back, snap hook and flat steel rebar hook at leg ends x 6 ft. (1.8m).

steel rebar hook x 6 ft. (1.8m).

RESIST LANYARDS

Polyurethane coated webbing provides ultimate protection against grease, oil and grime.

1240850

EZ-STOP™II RESIST LANYARD

Single-leg polyurethane coated wel snap hooks x 6 ft. (1.8m).

1*2*40880

EZ-STOP™II TIE-BACK RESIST LANYARD

Double-leg polyurethane coated web, floating D-rings for tie-back, snap hooks x 6 ft. (1.8m).

1240526 Double-leg polyurethane coated web, snap hooks x 6 ft. (1.8m).

KEVLAR® LANYARDS

When you need protection from high heat, such as when welding or working in high temperature environments.

KEVLAR® TIE-BACK LANYARD

Single-leg Kevlar® web with floating D-ring for tie-back, snap hooks x 6 ft. (1.8m).

EZ-STOP™II KEVLAR® LANYARDS

1240559 Single-leg Kevlar® web with snap hook and aluminum rebar hook x 6 ft. (1.8m).

1240680 Double-leg Kevlar® web with snap hooks at each end x 6 ft. (1.8m).



SHOCK ABSORBING LANYARDS

ARC FLASH LANYARDS

Constructed from unique materials, these lanyards are ideal for high heat environments or for electrical work when arc



EZ-STOP™II ARC FLASH LANYARDS

1240861 Single-leg with Kevlar® pack, coated web, snap hook at leg end, web loop at other x 6 ft. (1.8 m).

1240536 Double-leg with Kevlar® pack, coated web, snap hooks at leg ends, web loop at center x 6 ft. (1.8 m).

1240871 Double-leg with Kevlar® pack, coated web, snap hooks at leg ends, web loop at center x 6 ft. (1.8 m).

1240870

EZ-STOP™II ARC FLASH LANYARD

Single-leg with Kevlar® pack and web, snap hooks x 6 ft. (1.8 m).



WEB LOOP LANYARDS


Simply choke-off to back D-ring or to dorsal web loop. Reduces weight and is ideal for electrical applications where no metal above the waist is preferred.

1240068

EZ-STOP™II WEB LOOP LANYARD

900 lbs. or under.

Single-leg with snap hook at one end and web loop at other x 6 ft. (1.8 m).

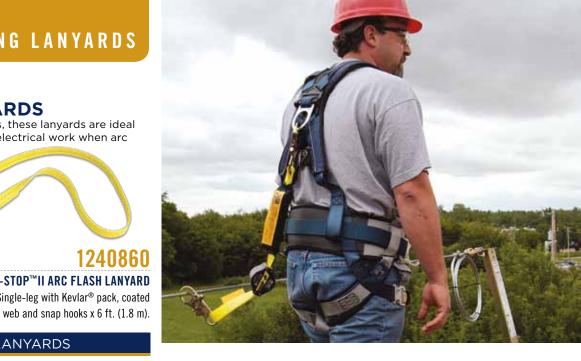

RETRAX™ LANYARDS

Unique spring technology retracts and expands from 2-1/2 ft. to 6 ft. in reaction to users movements.





EZ-STOP™ II RETRAX™ LANYARD

Single-leg with snap hooks at each end x 6 ft. (1.8m).

EZ-STOP™II RETRAX™ LANYARDS

1241461 Single-leg with snap hook and flat steel rebar hook x 6 ft. (1.8 m).

1241462 Single-leg with snap hook and aluminum rebar hook x 6 ft. (1.8 m).

1241463 Single-leg with snap hook and web loop x 6 ft. (1.8 m).

1241481 Double-leg with snap hook and flat steel rebar hooks at leg ends x 6 ft. (1.8 m).

1241482 Double-leg with snap hook and aluminum rebar hooks at leg ends x 6 ft. (1.8 m).



SHOCK ABSORBING LANYARDS

These lanyards are lightweight and simple. Their basic 1-3/8" tubular web design has proven to not only be safe and effective, but very popular. EZ-Stop" III lanyards limit average arresting forces to

1244024 Single-leg with span.

1244006

EZ-STOP™III SHOCK ABSORBING LANYARD

Single-leg with snap hooks at each end x 6 ft. (1.8 m).

1244024 Single-leg with snap hook and aluminum rebar hook x 6 ft. (1.8 m).

MLabBax_5 TIE-BACK LANYARDS

WrapBax[™]2 eliminates the need for a separate anchorage connector, reducing inventory and cost, simplifying inspections, training and improving compliance. It offers a unique 5,000 lb. (22kN) hook and heavy duty webbing, providing abrasion resistance. Limits the average arresting force to 900 lbs. (4kN) or less.



WRAPBAX™2 TIE-BACK LANYARD

Single-leg with snap hook and 5.000 lb. (22kN) WrapBax[™] hook x 6 ft. (1.8 m).

1242102 Single-leg Force2[™] with snap hook and 5,000 lb. (22kN) WrapBax $^{\text{TM}}$ hook x 6 ft. (1.8 m).



1242128 Double-leg Force2[™] with snap hook and 5,000 lb. (22kN) WrapBax[™] hooks at leg ends x 6 ft. (1.8 m).



Ideal when there is no overhead anchorage and your only option is to tie-off at your feet. It can be used for up to a 12 ft. (3.7 m) free fall and limits the average forces below 1,800 lbs. (8kN). It can also be used as a standard lanyard up to a 6-ft. free fall for workers that require a capacity of 311 lbs. to 420 lbs. (141 kg to 190 kg).

1245006 FORCE2™ LANYARD

Single-leg with snap hooks at each end x 6 ft. (1.8 m).

1245176 Double-leg with snap hooks at each end x 6 ft. (1.8 m).

1245177 Double-leg with snap hook and flat steel rebar hooks at leg ends x 6 ft. (1.8 m).



WIND ENERGY LANYARDS 1244760 FORCE2™ WIND **ENERGY LANYARD** Double-leg with elastic webbing, snap hook and flat steel rebar hooks

at leg ends, Tech-Lite™ rescue

compliance OSHA, ANSI and CE.

cover x 6 ft. (1.8 m). Global

D-rings, nylon shock pack with PVC

1241081

FORCE2™ ARC FLASH LANYARD

Double-leg with Kevlar®/Nomex® adjustable web, snap hooks at ends x 6 ft. (1.8 m).

Single-leg with Kevlar®/Nomex® adjustable web, snap hooks at ends x 6 ft. (1.8 m).

1242551

FORCE2™ WIND ENERGY LANYARD

Double-leg with elastic web, snap hook and Saflok Max[™] hooks on leg ends, integrated rescue D-rings x 6 ft. (1.8 m).

1242550 Double-leg with elastic web, snap hook and aluminum rebar hooks at leg ends, integrated rescue D-rings x 6 ft. (1.8 m).

FORCE2™ WIND ENERGY LANYARDS

Double-leg with elastic web, snap hook and aluminum rebar hooks at leg ends x 6 ft. (1.8 m).

1245208 Double-leg with elastic web, snap hook and Saflok Max[™] hooks at leg ends x 6 ft. (1.8 m).

POSITIONING LANYARDS

Lanyards without shock absorbers, such as rope or web lanyards and chain rebar assemblies, are designed for positioning or

restraint applications.

WEB POSITIONING LANYARDS

1" polyester web construction for durability that will last. Available in various lengths.

Single-leg with 1" polyester web, adjustable length and snap hooks at each end x 6 ft. (1.8 m).

1231106

WEB LANYARD

Single-leg with 1" polyester web and snap hooks at each end x 6 ft. (1.8 m).



POSITIONING WEB LANYARDS

Single-leg with 1" polyester web and snap hooks x 2 ft. (0.6 m).

Single-leg with 1" polyester web and snap hooks x 3 ft. (0.9 m).

Single-leg with 1" polyester web and snap hooks x 4 ft. (1.2 m).

ROPE POSITIONING LANYARDS

Nylon or polyester rope available in various lengths with exclusive five-tuck splice and seizing method to hold the connection and prevent unweaving.

1232354

NYLON ROPE LANYARD

Single-leg 1/2" nylon rope with snap hooks at each end x 6 ft. (1.8 m).



POLYESTER ROPE LANYARD

Single-leg 1/2" polyester rope with adjustable length and snap hooks at each end x 6 ft. (1.8 m).



POSITIONING ROPE LANYARDS

Single-leg 1/2" nylon rope with adjustable length and snap hooks at each end x 6 ft. (1.8 m).

1232306 Single-leg 1/2" polyester rope with snap hooks at each end x 6 ft. (1.8 m).

CHAIN & WEB REBAR POSITIONING LANYARDS

Made of twist link chain or polyester web for strength and durability. A variety of hook options provide a safe and compatible connection to many types of structures.



CHAIN REBAR LANYARDS

5920050 Chain rebar assembly with snap hooks and swiveling flat steel rebar hook at center x 20.5" (52 cm).

5920051 Chain rebar assembly with snap hooks and swiveling aluminum rebar hook at center x 22" (56 cm).

5920080 Chain rebar assembly with snap hooks and aluminum rebar hook at center x 20.5" (52 cm).

5920101 Chain rebar assembly with snap hooks and swiveling 2000114 carabiner at center x 22" (56 cm).



WEB REBAR LANYARDS

1231389 Web rebar assembly with snap hooks and Saflok Max[™] hook at center x 18" (45 cm).

1231520 Web rebar assembly with snap hooks and swiveling aluminum hook at center x 22" (56 cm).

2108403



Use with large carabiner to form a positioning assembly that is short and compact. Steel hooks with self locking/closing 3,600 lb. (16kN) gates.

WHERE BUCKET TRUCKS DARE NOT GO.

CYNCHLOK* GETS YOU THERE FASTER AND SAFER.

Cynch-Lok™ was developed with help from real pole climbers and features effortless adjustment and "cynches" around the pole during a "cut-out." Cynch-Lok™ meets CSA Z259.14 standards for Type A and AB (dry, wet and icy poles) and ASTM F887 - 11. Cynch-Lok™ allows you to easily hitch-hike poles (move or jump the strap upwards) with a hand position that's comfortable. It also moves past obstacles without difficulty. Exterior straps can easily be swapped out in the field depending on pole size, eliminating the need for multiple systems.



CYNCH LOK* FALL RESTRICTING DEVICES

1204057

CYNCH-LOK™ ROPE FOR DISTRIBUTION POLES

- Pole Size (Dia/Circ): Min 5.5"/17.5"- Max 18.5"/58"
- Weight: 4.8 lbs (2.1 kg)

1204058 Cynch-Lok[™] Rope for Transmission Poles, Pole Size: (Dia/Circ): Min 5.5"/17.5"- Max 30.5"/96" Weight: 5.3 lbs (2.4 kg)

1204075

CYNCH-LOK™ WEB FOR DISTRIBUTION POLES

- Pole Size (Dia/Circ): Min 5.5"/17.5" Max 18.5"/58"
- Weight: 4.9 lbs (2.2 kg)

1204076 Cynch-Lok™ Web for Transmission Poles, Pole Size: (Dia/Circ): Min 5.5"/17.5"- Max 30.5"/96" Weight: 5.4 lbs (2.4 kg)



CYNCH-LOK™ REPLACEMENT COMPONENTS

1200110

CYNCH-LOK™ REPLACEMENT STRAP FOR DISTRIBUTION POLES

- Pole Size (Dia/Circ): Min 5.5"/17.5"- Max 18.5"/58"
- Weight: 1.9 lbs (.86 kg)

1200111 Cynch-Lok™ Replacement Strap for Transmission Poles, Pole Size: (Dia/Circ): 5.5"/17.5

- Max 30.5"/96, Weight: 2.4 lbs. (1.1 kg)



1200115 (not shown)

CYNCH-LOK™ REPLACEMENT ROPE INTERIOR STRAP

Weight: 2.9 lbs (1.3 kg)

1200136 (not shown)

CYNCH-LOK™ REPLACEMENT WEB INTERIOR STRAP

Weight: 3.0 lbs (1.3 kg)

ADDITIONAL POSITIONING LANYARDS

1234030

ADJUSTABLE WEB POSITIONING STRAP

Nylon web with friction buckle and snap hooks x 6 ft. (1.8 m)





1234070

ADJUSTABLE ROPE POSITIONING STRAP

with Rope Adjuster x 8 ft. (2.4 m)





DBI-SALA® is #1 in the development of reliable, versatile self retracting lifelines (SRLs).

Our innovations include the first retractable lifeline, sealed SRL, RSQ dual-mode SRL, 3-way SRL with built-in retrieval and the impact indicator—important safety innovations which have now been widely adopted across the industry. When there is nothing between you and the ground but clouds, it doesn't make sense to choose another brand. Our SRLs meet OSHA and ANSI standards.

HOW TO CHOOSE THE RIGHT SRL?

- HOUSING CONSTRUCTION
 Thermoplastic—When weight is key
 Aluminum—When ultimate durability is required
- LIFELINE MATERIAL Wire rope or synthetic options for varying environments
- SEALED DESIGN For harsh/corrosive environments
- RETRIEVAL Ideal for confined space rescue/retrieval applications
- RSQ Built-in rescue allows user to be lowered after a fall either automatically or manually
- FAST-LINE™ Allows user to replace lifeline assembly in the field
- TIE-BACK Eliminates the need for a separate anchorage connector
- HARNESS MOUNT Direct connection takes the hassle out of fall protection
- ARC FLASH RATED Built to withstand the demands of electrical work
- LEADING EDGE Specialized lifeline and external shock for leading edge applications

MATRIX	SEALED-BLOK™	ULTRA-LOK™	TALON™	NANO-LOK™
Lifeline Lengths	15' - 175'	10' - 85'	6' - 16'	6'
Housing Construction	Aluminum	Thermoplastic	Thermoplastic	Thermoplastic
Lifeline Material	Cable/Synthetic	Cable/Synthetic/Web	Web	Web
Sealed Design for Corrosive Environment	•			
Retrieval Option	-			
RSQ™	-	-		
FAST-Line™	-			
Tie-Back Option			-	
Direct Harness Mount			•	•
Arc Flash Rated		•		
Leading Edge		-		
Compact Size				•

Equipped with





SALA

SELF RETRACTING LIFELINES

SEALED-BLOK™

SELF RETRACTING LIFELINES

These sealed SRLs incorporate a patented concept that separates all dynamic components, including the motor spring and brake, from foreign elements such as grease, moisture and dirt. You can always trust your SRL to work at peak efficiency without worrying about the environment you're working in.

TRUSTED - Our sealed SRLs are backed by decades of proven field service for absolute confidence.

DURABLE - Heavy-duty, corrosion resistant materials stand-up to even the harshest of environments.

RELIABLE - Sealed design protects device from foreign elements, extending maintenance intervals and longevity.

PIVOTING ANCHORAGE LOOP Centers the load.

---- - ALUMINUM HOUSING

Provides exceptional strength, durability and corrosion resistance.

STAINLESS STEEL **END-PLATE**

SEALED DESIGN

Ensures efficient, safe operation under all working conditions —only SRL to meet IP68 sealed rating.

ANTI-RATCHETING **DESIGN**

Stavs locked on rigid and non-rigid (horizontal lifeline) anchors.

420 LB. WEIGHT CAPACITY

Higher capacity for operator and tools (option).

Model Shown

3400900

Provides added comfort and ease-of-use

ERGONOMIC CABLE HANDLE

when making connections.

GALVANIZED & STAINLESS STEEL CABLE

Abrasion resistant and corrosion resistant lifeline options.

IMPACT INDICATOR

Provides visual indication of fall arrest.

3.600 LB. GATE

Reduces chances of accidental disengagement ("roll-out").

CARRYING HANDLE


Built-in design for easy transport certified as secondary fall arrest rated anchorage point.



SELF LOCKING SWIVEL HOOK Limits lifeline twisting.

FAST-LINE™

Provides the user with ability to replace the lifeline in the field.



(see pages 62-62 for details) Allows user to select either fall arrest mode or descent mode.



Model Shown 3400930



SEALED-BLOKTM SELF RETRACTING LIFELINES

The Sealed-Blok™ lifeline extends and retracts enabling the user to move about within a recommended working area at normal speeds. Should a fall occur, a speed-sensing brake system (4.5 ft./sec.) will activate, stopping the fall and reducing the forces imposed on the user to 900 lbs. (4kN) or less.



3-way models with built-in emergency retrieval and mounting brackets are ideal for confined space rescue. Available with and without mounting brackets. See confined space section for additional options.



FAST-Line™ allows the lifeline assembly to be replaced out in the field.

FAST-LINE™ CABLE REPLACEMENT ASSEMBLIES



3900105

Galvanized Cable with Plated Hook 50 ft. (15 m) FAST-Line™ galvanized replacement cable assembly.

3900108 85 ft. (25.9 m) **3900112** 130 ft. (39.6 m)



Stainless Steel Cable with Stainless Steel Hook 50 ft. (15 m) FAST-Line™ stainless steel replacement cable assembly.

Other models available; please contact DBI-SALA®.

3900111 85 ft. (25.9 m) **3900114** 130 ft. (39.6 m)

	LIFELINE MATERIAL	HOOK MATERIAL	INCLUDES MOUNTING BRACKET	RETRIEVAL CAPABILITY	RSQ CAPABILITY	310 LB. (141 KG) WEIGHT CAPACI	420 LB. (189 KG) WEIGHT CAPACI	15 ft. (4.5 m)	30 ft. (9 m)	50 ft. (15 m)	85 ft. (25.5 m)	130 ft. (39 m)	175 ft. (52.5 m)
						-		3400825	3400800				3400610
							•			3400900	3400860	3400965	
	ABLE			-		-			3400850				3400620
OSHA/ANSI	GALVANIZED CABLE	STEEL		-			•			3400920	3400870	3400975	
	/ANIZ	STI		-	•	-				3400940	3400910	3401002	
	GAL				-	-				3400930	3400885	3400990	
			•	-		-			3400853				
			-	-			•			3400923	3400871	3400976	
	щ					-		3400827	3400802				3400612
	STAINLESS STEEL CABLE	EE					•			3400902	3400862	3400967	
	TEEL	STAINLESS STEEL			•	-				3400932	3400886	3400991	
	ESS S	INLE		•		-			3400852				
	TAIN	STA		•			•			3400922	3400874	3400979	
	S			•	•	-				3400942	3400912	3401004	
			-	•		-			3400858				
			-	-			•			3400926	3400882	3400987	
						WEI	GHT	12 lbs. (5.5 kg)	18 lbs. (8 kg)	29 lbs. (13 kg)	44 lbs. (20 kg)	60 lbs. (27 kg)	100 lbs. (45 kg)
	SEALED DESIGN				EALED DESIGN		IGN	Sealed	Sealed	Sealed	Sealed	Sealed	Non- Sealed
FAST-LINE™					T-LIN	NE™			Standard	Standard	Standard		
			APPF	ROXII	MATE	LEN	GTH	10.2" (25 cm)	11.5" (29 cm)	13.3" (34 cm)	16" (41 cm)	18.7" (48 cm)	18.7" (48 cm)
			API	PROX	IMAT	E WI	DTH	7.6" (19 cm)	9.4" (24 cm)	10.4" (27 cm)	9.9" (25 cm)	11.7" (30 cm)	11.7" (30 cm)
			APP	ROXI	MATE	HEI	GHT	4.3" (11 cm)	5.4" (14 cm)	6.9" (18 cm)	6.7" (17 cm)	7.2" (18 cm)	10.9" (28 cm)

ULTRA-LOK™

These SRLs are rugged, yet extremely lightweight and superbly engineered devices you can count on for safety, efficiency and comfort. Stainless steel components, an anti-ratcheting brake system and a semi-sealed design provide the user with a system built to last.

SEMI-SEALED DESIGN

Gasket between housing halves helps prevent contaminants from entering, extending life of device.

TOP SWIVEL

Limits lifeline twisting for smoother operation.

CONSTANT MOVING PAWLS

Helps prevent corrosion or freeze-up and provides audio indicator of functioning brake system.

ANTI-RATCHETING DESIGN

Stays locked on rigid and non-rigid (horizontal lifeline) anchors.

RESERVE LIFELINE

Allows brake to function properly when entire lifeline is extended.

STAINLESS STEEL COMPONENTS

Motor spring, fasteners, locking pawls, shaft, springs and ratchet plate are stainless steel to extend life of device.

THERMOPLASTIC HOUSING

Lightweight, compact and durable.



Provides added comfort and ease-of-use when making connections.

MULTIPLE LIFELINE OPTIONS

Cable, web, Vectran[™] and Spectra[™] rope lifeline options for ultimate jobsite flexibility.

SELF LOCKING SWIVEL HOOK Limits lifeline twisting.

IMPACT INDICATOR

Provides visual indication of fall arrest.

3600 LB. GATE

Model Shown 3504450

Reduces chances of accidental disengagement ("roll-out").

420 LB. WEIGHT CAPACITY

Higher capacity for operator and tools (option).



Model Shown 3504550

RSQ™ DUAL-MODE DESIGN (see pages 62-63 for details)

10

Allows user to select either fall arrest mode or descent mode.







ULTRA-LOK"

SELF RETRACTING LIFELINES

The Ultra-Lok™ lifeline extends and retracts, enabling the user to move about within a recommended working area at normal speeds. Should a fall occur, a speed-sensing brake system (4.5 ft./sec.) will activate, stopping the fall and reducing the forces imposed on the user to 900 lbs. (4kN) or less.



3103108

WEB SRL

Nylon web lifeline models are lighter weight for added comfort and are less abrasive to objects around system.



3504500

LEADING EDGE SRL

Unique design incorporates larger diameter 7/32" cable and an in-line shock absorber for the demands of leading edge applications.

LIFELINE MATERIAL	HOOK STYLE	HOOK THROAT SIZE (IN)	RATED GATE CAPACITY (LBS.)	SWIVEL HOOK	ORDER PICKER MOUNTING	LEADING EDGE	RSQ	SRL WEIGHT CAPACITY (LBS.)	11 ft. (3.4 m)	20 ft. (6.1 m)	30 ft. (9.1 m)	50 ft. (15.2 m)	55 ft. (16.7 m)	85 ft. (26 m)
	STEEL CARABINER	5/8	3,600					310		3504445	3504446	3504463		
GALVANIZED CABLE		5/8	3,600			•		310			3504500		3504600	
	STEEL HOOK	0.44	0.000				•	310		1		3504550		
		3/4	3,600	-				310		3504433	3504430	3504450		3504485
	07551 11001/	0.44	0.000				•	310				3504551		
STAINLESS	STEEL HOOK	3/4	3,600					310		3504434	3504431	3504451		3504486
STEEL CABLE	STAINLESS STEEL	0.44	0.000				•	310		1	1	3504552		
	HOOK	3/4	3,600					310		3504437	3504432	3504452		3504487
VECTRAN ROPE	STEEL HOOK	3/4	3,600					310		3504438		3504480		
	STEEL CARABINER	11/10	3,600					310		3103209				
		11/16	3,600					420	3103119					
	STAINLESS STEEL CARABINER	11/16	3,600					310		3103214	1			
	ALUMINUM REBAR HOOK	2 1/4	3,600		-			420	3103110					
NYLON WEB				•	•			420	3103108					
	STEEL HOOK	5/8	3,600	-				310		3103208				
	STEEL HOOK	3/6			-			420	3103107					
								310		3103207				
	STAINLESS STEEL	3/4	3 600	-	-			420	3103136					1
	HOOK	3/4	3,600	•				310		3103212	 			
	CTEEL HOOK	F /O	2 000	•	•			310	3103175	1 1 1 1 1	1 1 1 1		! ! ! !	
KEVLAR®/ Nomex® web	STEEL HOOK	5/8	3,600	•				310		3103275				
	WEB LOOP (CHOKER)	N/A	N/A		•			310	3103176					
			API	PROXI	MATE	WEB :	SRL W	/EIGHT	3.9 lbs. (1.8 kg)	5.5 lbs. (2.5 kg)	-	-	-	-
		AF	PROXIMAT	TE CAI					8 lbs. (3.6 kg)	9 lbs. (4.1 kg)	11 lbs. (5 kg)	15 lbs. (6.8 kg)	30 lbs. (13.6 kg)	33 lbs. (15 kg
								DEPTH	2" (5.1 cm)	2" (5.1 cm)	3.3" (8.4 cm)	3.3" (8.4 cm)	3.3" (8.4 cm)	3.3" (8.4 cm
								WIDTH IEIGHT	5.2" (13.3 cm) 7.6" (19.3 cm)	6.4" (16.2 cm) 8.9" (22.6 cm)	6" (15.2 cm) 11.5" (29.2 cm)	6" (15.2 cm) 11.5" (29.2 cm)	6" (15.2 cm) 11.5" (29.2 cm)	6" (15.2 cm 11.5" (29.2 cm

^{*} Other models available; please contact DBI-SALA®.



CHOOSE YOUR MODE



AUTOMATIC DESCENT MODE

(Self Rescue/Descent):

A speed-sensing brake stops the fall just like in fall arrest mode, then instantly a centrifugal brake activates, lowering the user at a controlled speed to the next level or the ground.

Model Shown

3504550



FALL ARREST MODEAssisted Rescue by Pole



FALL ARREST MODEAssisted Rescue by Hand



AUTOMATIC DESCENT MODE Self Rescue/Descent









SEALED-BLOK™ RSQ ASSISTED RESCUE ACCESSORIES

3500201	First-Man-Up™ Pole 6-12 ft. (1.8-3.6 m) with Assisted Rescue Tool
3500202	First-Man-Up™ Pole 8-16 ft. (2.4-4.8 m) with Assisted Rescue Tool
3500200	Assisted Rescue Tool Only (If you already have a First-Man-Up™ Pole)

ULTRA-LOK™ RSQ ASSISTED RESCUE ACCESSORIES

3500101	First-Man-Up [™] Pole 6-12 ft. (1.8-3.6 m) with Assisted Rescue Tool
3500102	First-Man-Up™ Pole 8-16 ft. (2.4-4.8 m) with Assisted Rescue Tool
3500100	Assisted Rescue Tool Only (If you already have a First-Man-Up™ Pole)

SELF RETRACTING LIFELINES




SELF RETRACTING LIFELINE

Talon™ is an extremely compact SRL with an all metal anti-ratcheting braking system that limits arresting forces to 900 lbs. (4kN). Because of our unique brake system, your workers can maintain a normal work pace and not be interrupted with constant lock ups. An SRL that is lighter, stronger and safer!

- Extremely lightweight design under 3 lbs. (1.4 kg)
- Built-in connector for direct attachment to harness
- Greater freedom of movement without compromising safety
- Maintains compact size and weight for comfort and convenience



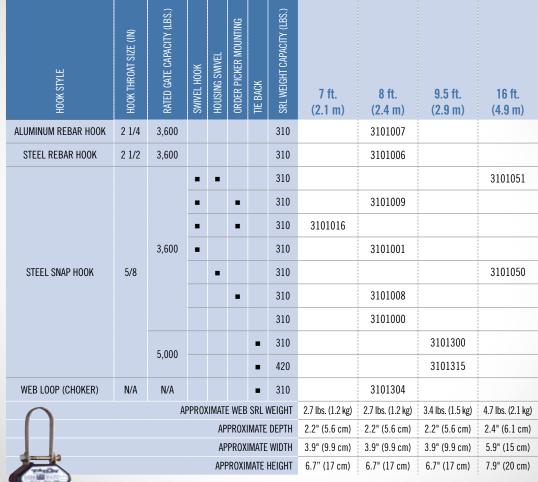



3101001

TALON™ QUICK CONNECT SELF RETRACTING LIFELINE

Web SRL with quick connector and swiveling hook x 8 ft. (2.4 m).



TALON™ ORDER PICKER SELF RETRACTING LIFELINE

Web SRL with order picker connector and swiveling hook x 8 ft. (2.4 m).



* Other models available; please contact DBI-SALA®.



TWIN-LEG SELF RETRACTING LIFELINE

Provides a significant increase in mobility and safety, allowing user to "leap-frog" while moving from one location to

another. Each lifeline works independently, extending up to 6 feet and automatically retracting, providing fall protection and mobility 100% of the time.


■ Twin-leg 100% tie-off SRL provides continuous protection


• Built-in anchorage connector for direct attachment to harness or anchorage

 Compact, lightweight design does not hinder movement

 Replaces a simple lanyard with the convenience of a retractable lifeline

> Model Shown 1102000 Harness

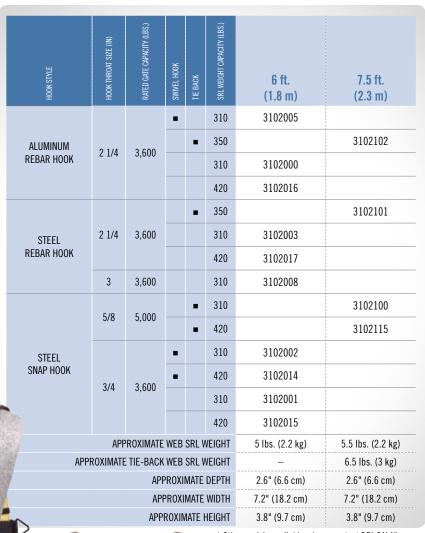



3102100

TALON™ TIE-BACK **MODEL SHOWN**

All twin-leg Talon™ SRLs include: Delta Comfort Pad and 2 ea. Lanyard Keepers



SINGLE AND TWIN-LEG TALON™ HOOK OPTIONS



Standard Hook 3/4" (19 mm) Gate Opening -3,600 lb. (16Kn) Gate Strength



Swiveling Hook 3/4" (19 mm) Gate Opening -3,600 lb. (16Kn) **Gate Strength**



WrapBax™ Hook 3/4" (19 mm) Gate Opening -5.000 lb. Gate Strength



2000112—Saflok™ Steel Carabiner 11/16" (17.5 mm) Gate Opening -3,600 lb. (16Kn) Gate Strength



2000114—Saflok™ **Steel Carabiner** 2-3/16" (55.5 mm) Gate Opening -3,600 lb. (16Kn) **Gate Strength**



Aluminum Rebar Hook 2-1/4" (57 mm) Gate Opening - 3,600 lb. (16Kn) Gate Strength



Flat Steel Rebar Hook 2-1/2" (62.5 mm) Gate Opening - 3,600 lb. (16Kn) Gate Strength



Saflok Max™ Steel Rebar Hook 3" (76.2 mm) Gate Opening - 3,600 lb. (16Kn) Gate Strength

SELF RETRACTING LIFELINES

NANC-LOK*

SELF RETRACTING LIFELINE

Nano-Lok™ is ergonomically designed for ease-of-use and is ideal for direct connection to most harnesses. At only 1.6 lbs., it's virtually unnoticable on your back, stays out of the way and can be easily used as a lanyard replacement. Whether your application requires single or twin leg configurations, mounting to an overhead anchor or for connection directly to harness, there are more than 30 models to choose from to suit almost any application. Nano-Lok™ locks quickly—stopping a fall within inches—providing more protection at low heights. In addition, tension is always kept on the lifeline, which reduces dragging, snapping and trip falls. Both features are key safety improvements.





DIRECT-TO-HARNESS CONNECTION —INSTALLS DIRECTLY TO WEBBING ON MOST HARNESSES

- Leaves D-ring open for other equipment or rescue
- Provides snug fit to workers back
 eliminates nuisance flopping
- Lower attachment point keeps housing at shoulder level vs. head level

Equipped with





IMPACT-RESISTANT HOUSING

High-strength housing provides maximum durability

100% TIE-OFF CONFIGURATION

Provides continuous fall protection and added mobility when moving from one location to another; replaces twin-leg lanyard improves safety

IMPACT INDICATOR

Integrated shock absorber provides visual indication of a fall

- RETRACTABLE LIFELINE

6-ft. lifeline provides continuous fall protection without restrictions—keeps lifeline out of worker's way, reducing dragging, snagging and trip falls

• i-Safe™ EQUIPPED

Helps track equipment and manage safety inspection programs

EXTREMELY COMPACT & LIGHTWEIGHT

At just 1.6 lbs., this SRL is the lightest, most compact unit on the market in its class—15% lighter and 30% smaller

WIDE VARIETY OF CONFIGURATIONS

Provides complete jobsite versatility and flexibility

420 LB. WEIGHT CAPACITY

Higher capacity for operator and tools



SINGLE LEG ANCHORAGE CONNECTOR

Attaches directly to back of most harnesses (no separate carabiner required) with swiveling anchorage loop that limits lifeline twisting for smoother operation

TWIN LEG ANCHORAGE CONNECTOR

Attach two SRLs directly to back of most harnesses; installs to web—leaves dorsal D-ring open for other equipment or rescue; design provides snug fit to worker's back; interchangeable SRLs allow versatility and replacement options

AUTOMATIC QUICK-ACTIVATING ARRESTOR

Stops falling worker within inches
—reduces fall distances and
average arresting forces to 900 lbs.
or less; replaces lanyard and
improves safety





NANO-LOK* **HOOKS AND ANCHORS SELECTION GUIDE**

LIFELIN	IE HOOK	ANCHORAGE TYPE
A — Steel Snap Hook B — Steel Rebar Hook C — Aluminum Rebar Hook	5 — Steel Swiveling Snap Hook E — Aluminum Carabiner (Captive Eye) F — Aluminum Snap Hook	A—Steel Snap Hook B—Steel Rebar Hook C—Aluminum Rebar Hook G—Cab Mount H—Single Leg Connector I—Twin Leg Connector J—Twin Leg Connector K—Steel Carabiner L—Aluminum Carabiner



A—STANDARD STEEL SNAP

B—FLAT STEEL REBAR 2-1/2" (62.5 mm) gate opening



C—ALUMINUM REBAR 2-1/4" (57 mm) gate opening



D—STEEL SWIVELING SNAP 3/4" (19 mm) gate opening



E-ALUMINUM CARABINER 3/4" (19 mm) gate opening



F—ALUMINUM SNAP 3/4" (19 mm) gate opening



L-ALUMINUM CARABINER 3/4" (19 mm) gate opening



ANCHOR END



10	N GUIDE	Steel Sn. Steel Re	Aluminu	Steel Sv	Aluminu Aluminu	Steel Sn		Aluminu Cab Mo	Single L	Twin Leg	Twin Leg	Steel Ca Aluminu	PART	WEIGHT
		A – B	ا ا	٦ 	F - /	H	<u>ا</u> د	ا ا	1			주	NUMBER	(LBS.)
	CAB MOUNT	-						-					3101240	2.38
	GAD MOUNT			-				-					3101239	2.67
		-							-				3101228	2.35
				-					-				3101253	2.64
	HARNESS MOUNT	-							-				3101229	3.32
	(HOUSING TO HARNESS)				-				-				3101225	1.97
					-				-				3101226	2.26
			-						-				3101227	2.92
		-										-	3101215	2.51
				-								•	3101216	2.80
		-										•	3101217	3.48
SINGLE LEG		-				-							3101218	2.61
	HOOK MOUNT	-				-							3101219	3.58
	(HOUSING TO D-RING, STRUCTURE OR ANCHOR POINT)			-			•						3101241	3.88
					-								3101235	1.87
					-								3101214	2.16
			-										3101236	2.81
					-		- 1	•					3101237	2.81
					-		- 1	•					3101238	3.10
		-											3101252	1.95
				-									3101251	2.25
	NO ANCHOR CONNECTOR (ANCHORAGE LOOP ONLY)	-											3101250	2.92
					-								3101211	1.58
					-								3101210	1.87
			•					1					3101254	2.53
										•			3101279	4.43
				-						•			3101278	5.02
	HARNESS MOUNT							1		•			3101280	6.37
	(HOUSING TO HARNESS)				-					-			3101275	3.69
5					-		1	1		-	-		3101276	4.26
TWIN LEG								+		-		-	3101277	5.57
≥		-						-	-		-	-	3101287	4.32
	FIXED D-RING			-				-	-		-	-	3101274	4.90
	HARNESS MOUNT	-							-		-	-	3101288	6.26
	(HOUSING TO HARNESS)				-						-		3101271	3.57
					-						-		3101272	4.14
			-					-			-		3101273	5.46
SS	CAB AND							-					3100089	.42
ANCHORS	HARNESS MOUNT								-				3100088	.39
ANC	(ANCHORS ONLY)									-			3100087	.52
		-									-1		3100107	.41

G-CAB MOUNT H—SINGLE LEG CONNECTOR

Stainless steel bracket, Triple-action open/close, 1.63" (41.4 mm) by 4.25" zinc-plated steel (108 mm)



I—TWIN LEG CONNECTOR Self locking/closing gate, 3/4" (19 mm) opening



J-TWIN LEG CONNECTOR, FIXED Triple locking gate, 3/4" (19 mm) opening, required for ExoFit™ and other "fixed" D-ring harnesses



K—Saflok™ STEEL **CARABINER** 11/16" (17.4 mm) gate opening





ACCESSORIES

See pages 90-101 for other anchorage devices.

8102101

REMOTE POWER TAGLINE SYSTEM

Ideal for use in applications where bridge cranes or other temporary overhead obstructions exist and fall protection is needed.

The system provides easy, remote access to an overhead self retracting lifeline.

- 75 ft. per minute travel speed for rapid access
- 100 ft. length—long enough to handle the tallest ceiling-to-floor application
- Accommodates up to three SRLs for added jobsite versatility
- Includes both wireless remote and corded controls for added flexibility
- Operates on standard 110 volt power for ease of installation

8102102 REMOTE POWER TAGLINE SYSTEM 220 volt power

7211856

TAGLINE FOR SRL

1003006 **TIE-OFF ADAPTOR** Pass thru style polyester web x 6 ft. (1.8 m)

5900551

Cable pass-thru tie-off adaptor x 6 ft. (1.8 m)

3/16" polypropylene rope with 0-ring at one end x 50 ft. (15 m)

7211857 Tagline x 25 ft. (7.6 m)

7211858 Tagline x 35 ft. (10.6 m)













2000112

SAFLOK™ CARABINER

Steel carabiner, self locking/ closing 3,600 lb. (16kN) gate, 11/16" (17.5 mm) opening.

2000113

SAFLOK™ CARABINER

Steel carabiner, self locking/ closing 3,600 lb. (16kN) gate, 1-3/16" (30 mm) gate opening.



SAFLOK™ CARABINER

Steel carabiner, self locking/ closing 3,600 lb. (16kN) gate, 2-3/16" (55.5 mm) gate opening.

LOAD ARRESTOR

Protect valuable equipment and materials with sturdy, self-contained backup load arrestors. They are designed and engineered to completely stop a dropping load if it breaks free from the main support unit.

3700300

LOAD ARRESTOR


Inertia-activated shock-absorbing brake with indicator button. Maximum load is 660 lbs. (300 kg), length of cable is 40 ft. (12.2 m)

3700400 Load Arrestor, 880 lb. (400 kg) load rating x 26 ft. (8 m)


3700801 Load Arrestor with pulley, 1,760 lb. (800 kg) load rating x 13 ft. (4 m)

3700501 Load Arrestor, 1,100 lb. (500 kg) load rating x 17 ft. (5.2 m)



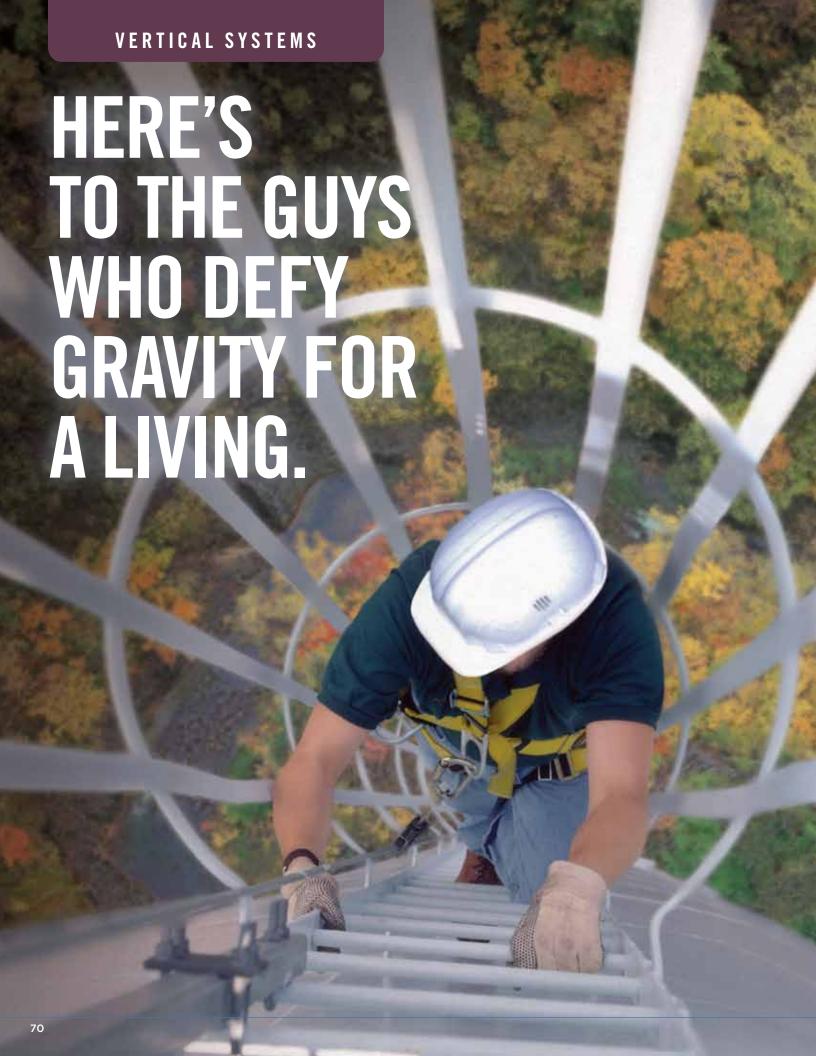



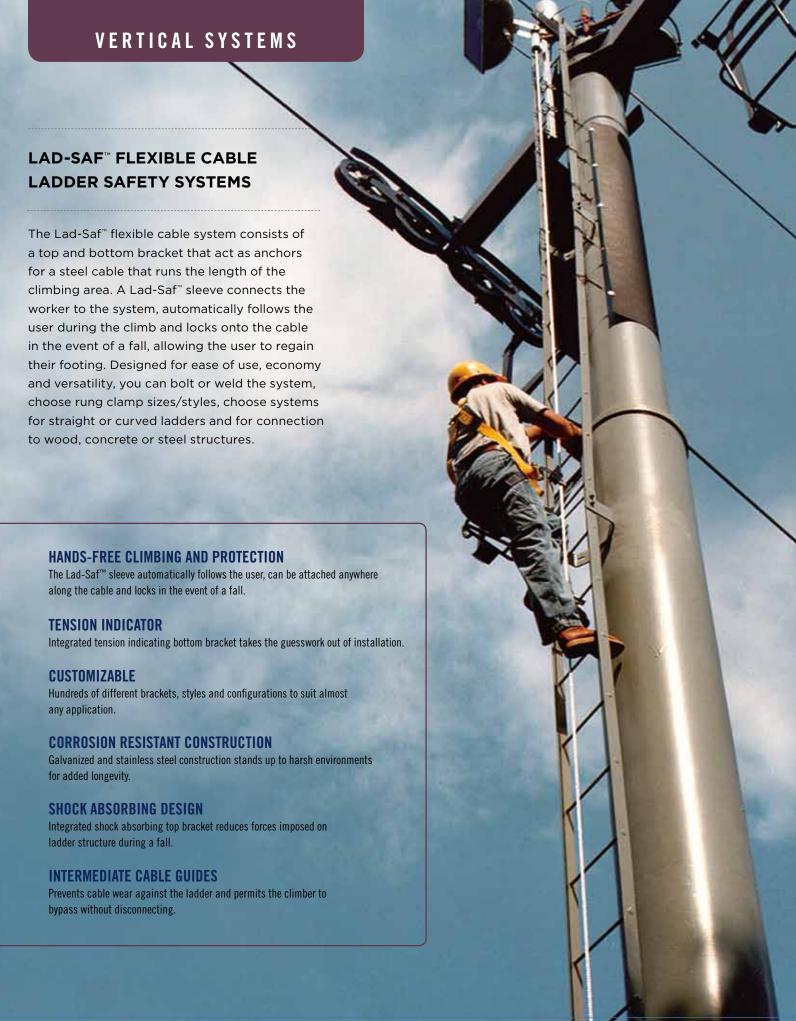

LAD-SAF™ FIXED LADDER SAFETY SYSTEM



STANDARD TOP BRACKET

Galvanized top bracket with mounting hardware. For systems up to 499 ft. (152 m) high, fits up to 1-1/8" (2.85 cm) rung diameter, attaches to 3 rungs, built-in energy absorber.

6116410 Standard top bracket and hardware for systems over 500 ft. (152.4 m).

-6110000

CABLE LIFELINE

Galvanized cable, 3/8" (9.5 mm) diameter. 1x7 type. Last 3 digits in part number indicate length.

-6100400

CABLE GUIDE

Non-metallic cable guide with mounting hardware. For systems up to 199 ft. (60.6 m), fits up to 1-1/8" (2.85 cm) rung diameter. Must have 1 every 25 ft. (7.6 m).

• 6100515 Cable guide and hardware for systems over 200 ft. (61 m).

-6116540

LAD-SAF™ FLEXIBLE CABLE SLEEVE

Climbing sleeve - see product details to right.

-6100090

STANDARD BOTTOM BRACKET

Fits up to 1-1/8" (2.85 cm) rung diameter, attaches to 2 rungs, tensioning device, galvanized.

LAD-SAF™ FLEXIBLE CABLE SLEEVE

The Lad-Saf™ sleeve is globally recognized and preferred because of its user friendly and reliable design. The sleeve is easily attached or removed anywhere along the cable and automatically follows you as you climb or descend. In the event of a fall, the device locks onto the cable lifeline allowing you to regain your footing and continue to climb.





VERTICAL SYSTEMS

LAD-SAF™ STEEL POLE (WELD-ON) LADDER SAFETY SYSTEM



-6116261

TOP BRACKET

Weld-on top bracket with built-in energy absorber and fasteners.

6100710 Stand-off, stainless steel for use with top bracket.

-6110000

CABLE LIFELINE

Galvanized cable, 3/8" (9.5 mm) diameter, 1x7 type. Last 3 digits in part number indicate length.

6100430

CABLE GUIDE

Non-metallic cable guide. Must have 1 every 25 ft. (7.6 m).

6100136 Cable guide support, same quantity as cable guide(s).

6116540

LAD-SAF™ FLEXIBLE **CABLE SLEEVE**

Climbing sleeve—see product details on previous page.

-6100035

BOTTOM BRACKET

Galvanized bottom bracket with built-in tensioner.

6100710 Stand-off, stainless steel for use with bottom bracket.

Angle-iron clamp-on and wood pole bolt-on systems also available call today.







LAD-SAF™ CURVED LADDER SAFETY SYSTEM



every 25 ft. (7.6 m) plus 3 through each curved section.

6110000·

CABLE LIFELINE

Galvanized cable, 3/8" (9.5 mm) diameter, 1x7 type. Last 3 digits in part number indicate length.

6116540-

LAD-SAF™ FLEXIBLE CABLE SLEEVE

Climbing sleeve—see product details on previous page.

6100015·

BOTTOM BRACKET

Fits up to 1-1/8" (2.85 cm) rung diameter, attaches to 2 rungs, tensioning device, galvanized.





LAD-SAF™ LADDER ACCESSORIES



6147000

TELESCOPING EXTENSION

Self-contained ladder safety system can be returned to its stored position when not in use below the opening so it can be covered.

- Telescoping top bracket with hardware
- Galvanized cable lifeline
- Counterweight to tension lifeline
- Order by length—last three digits in part number indicate length

6116038

LADDER MAST

Galvanized removable extension with pulleys, mounting bracket for winch/SRL.

6116027

Galvanized bottom mounting bracket attaches 6116038 to ladder.

6116026

LADDER ANCHOR POST

Galvanized removable extension with eye-bolt anchor to attach 3-way SRL.

6116027

Galvanized bottom mounting bracket attaches 6116026 to ladder.



5901980

LADDER GATE

Protects you from the dangers (and liability) of unauthorized ladder access.

- Fits ladder widths up to 20" (50.8 cm)
- Mounting hardware included
- Aluminum construction
- 8 ft. (2.4 m) height x 36" (91.4c m) width





The Railok 90™ rigid rail system consists of top and bottom entry/exit gates, rail joints, and multiple mounting bracket options designed to mount the rigid aluminum rail to the structure. A Railok 90™ shuttle connects the worker to the system and locks onto the rail in the event of a fall, allowing the user to regain their footing. Designed for ease of use and versatility, you can configure to an existing ladder or customize a system with integrated ladder pegs when no ladder exists. Various clamps are available to attach to almost any structure.

SHOCK ABSORBING DESIGN

Integrated metallic energy absorber in shuttle reduces forces imposed on system and worker.

HANDS-FREE CLIMBING AND PROTECTION

The Railok 90[™] shuttle automatically follows the user and locks in the event of a fall.

LADDER RUNG CLAMPS

Provide multiple anchor points to the structure for added safety.

CUSTOMIZABLE

Many different clamps and configurations available to suit almost any need.

CORROSION RESISTANT CONSTRUCTION

Aluminum, stainless steel and galvanized construction stands up to harsh environments for added longevity.





TOP LADDER RAIL GATE

Aluminum and galvanized steel clamp with fastening hardware. Allows user to easily attach shuttle to the system and prevents accidental removal from the system.

-6000120

LADDER RUNG CLAMP

Aluminum and galvanized steel clamp with fastening hardware. Attaches rail to ladder structure. Use within 1 ft. (0.3 cm) of rail splice and one at least every 5 ft. (1.5 m).

-6000033

STANDARD RAIL

Anodized extruded aluminum rail x 6.56 ft. (2 m).
6000031 3.28 ft. (1 m) rail section
6000035 9.84 ft. (3 m) rail section

-6000100

RAIL JOINT

Aluminum and galvanized steel rail joint with fastening hardware. Attaches two rail sections together.

-6000377

RAILOK 90™ SHUTTLE

Climbing shuttle automatically follows user and locks onto rail during fall.

-6000375

BOTTOM STANDARD RAIL GATE

Aluminum and galvanized steel clamp with fastening hardware. Allows user to easily attach shuttle to the system and prevents accidental removal from the system.

-6000354

TOP LADDER RAIL GATE

Aluminum and galvanized steel clamp with fastening hardware. Allows user to easily attach shuttle to the system and prevents accidental removal from the system.

-6000132

ANGLE IRON CLAMP

Aluminum and galvanized steel clamp with fastening hardware. Attaches rail to angled iron structure. Other clamp styles available.

-6000298

STEP BOLT

Galvanized steel step bolt with fastening hardware. Attaches to ladder rail to create climbing pegs.

-6000100

RAIL JOINT

Aluminum and galvanized steel rail joint with fastening hardware. Attaches two rail sections together.

-6000307

LADDER RAIL

Anodized extruded aluminum rail with step bolt holes x 7.87 ft. (2.4 m).

6000301 1.96 ft. (0.6 m) ladder rail section **6000302** 2.95 ft. (0.9 m) ladder rail section

6000303 3.93 ft. (1.2 m) ladder rail section

6000304 4.92 ft. (1.5 m) ladder rail section

6000306 5.90 ft. (1.8 m) ladder rail section

-6000377

RAILOK 90™ SHUTTLE

Climbing shuttle automatically follows user and locks onto rail during fall.

-6000375

BOTTOM LADDER RAIL GATE

Aluminum and galvanized steel clamp with fastening hardware. Allows user to easily attach shuttle to the system and prevents accidental removal from the system.





LAD-SAF" POWERED CLIMB ASSIST LADDER SAFETY SYSTEM




powered climb assist system.

VERTICAL SYSTEMS

SSB CLIMB ASSIST SYSTEM

The DBI-SALA® SSB Climb Assist System, with external counterweight, aids workers and provides fall protection while climbing lengthy ladders and towers. It's ideal for use on land-based and offshore drilling platforms, where environmental and work conditions can make climbing ladders hazardous.

- Counterweight includes a runaway brake for added safety
- No limit to length of system for ultimate flexibility
- Durable aluminum housing and steel drum for durability and corrosion resistance

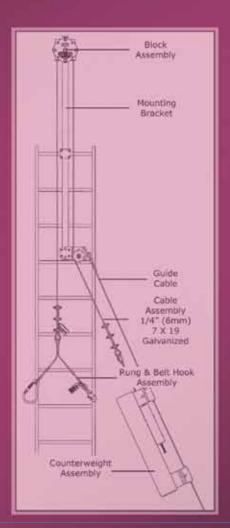

·3511063

SSB SAFETY BLOCK

Climb assist main block pulley assembly.

-3512000

LIFELINE ASSEMBLY

Galvanized 1/4" (6.3 cm) 7x19 cable assembly with rung and belt hook (last three digits in part number signify length).

3530000 Stainless steel lifeline assembly.

-3511783

MOUNTING BRACKET

Attaches safety block to structure. Fits round rungs up to 3/4" (1.9 cm) diameter or square rungs up to 9/16" (1.4 cm) per side.

3511785 Mounting Bracket, fits round rungs over 3/4" (1.9 cm) up to 1-1/2" (3.8 cm) diameter or square rungs over 9/16" and up to 1-1/2" (3.8 cm) per side.

-3511598

COUNTERWEIGHT ASSEMBLY

80 lb. (36.3 kg) counterweight with integrated runaway brake system.



ROPE GRABS

5000335

LAD-SAF™ ROPE GRAB (AUTO)

- Mobile design automatically follows user for hands-free operation
- Detachable design can be attached or removed anywhere along lifeline
- Inertia and cam locking systems for safety and to prevent "panic-grab"
- For use on 5/8" (16 mm) polyester/ polypropylene rope lifeline
- Use with 3 ft. (0.9 m) shock absorbing lanyard

5002042 Lad-Saf™ rope grab with attached 1242007 EZ-Stop™ shock absorbing lanyard x 3 ft (0.9 m).



1224005

EZ-STOP™ ROPE ADJUSTER (MANUAL)


- Manual design allows user to fix unit in place for positioning or restraint
- Attached 2 ft. (0.6 m) shock absorbing lanyard
- For use on 5/8" (16 mm) polyester/polypropylene rope lifeline

5000338

LAD-SAF™ WIRE ROPE GRAB (MANUAL)

- Manual design allows user to fix unit in place for positioning or restraint
- For use in extremely abrasive or corrosive environments
- For use on 3/8" (9.5 mm) 7x19 galvanized or stainless steel cable
- Use with 4 ft. (1.2 m) shock absorbing lanyard



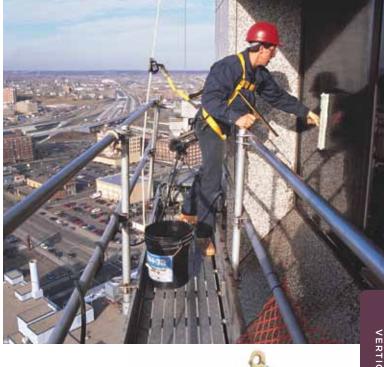

5000400

ROPE GRAB KIT

Complete rope grab system in a bag for convenient compliance and safety on the job.

Kit includes:

- Mobile Rope Grab (5000335)
- Shock Absorbing Lanyard (1240007)
- Lifeline x 50 ft. (1202794)
- Counterweight (5901583)
- Tie-Off Adaptor (1003000)
- Carrying Bag (9511597)

5000401 Rope grab kit with 100 ft. (30 m) lifeline (1202844) and (9503806) carrying bag.



Rope Lifelines

DBI-SALA® blended rope lifeline assemblies feature additional abrasion and UV resistance, for added durability, longevity and safety. Various styles and lengths are available to suit any need.

Lifeline Material	Hook Style	Lifeline Diameter (inch/mm)	30' Lifeline (9 m)	50' Lifeline (15 m)	75' Lifeline (22 m)	100' Lifeline (30 m)	150' Lifeline (46 m)
Polyester/ Polyproplyene	Snap Hook at One End	5/8" (15.9 mm)	1202754	1202794	1202821	1202844	1202879
Blend	Snap Hook at Both Ends		1202753	1202790	1202823	1202842	1202878

5901583

COUNTERWEIGHT 5.7 lb. (2.6 kg) flexible counterweight keeps lifeline taught.

You can always depend on our horizontal safety systems for mobility and fall protection when working at height. That's why safety engineers and site directors choose DBI-SALA® horizontal lifelines. We offer the broadest selection, as well as significant advantages in safety and productivity. Systems meet OSHA standards.

HOW TO CHOOSE A HORIZONTAL LIFELINE SYSTEM

A horizontal lifeline may appear to be a basic line strung between two anchors, but it is not. It is critical to choose a system that has been precision engineered and rigorously tested to meet OSHA and ANSI requirements. These systems are used to protect workers operating in the horizontal plane who may not have continuous access to suitable anchorage points. Some important considerations when selecting a system include:

ANCHORAGE STRUCTURE

The structure your system must attach to, such as an I-beam, rebar stud, concrete column or roof, can dictate the type of specialized system required.

PORTABLE OR PERMANENT

Temporary jobs require lightweight and easy-to-use portable systems that can be moved from one location to another. If a hazardous work

area is accessed often, such as a rooftop, a permanent solution like evolution™ may be a better choice.

CLEARANCE REQUIREMENTS

The distance between the work area and the next level or obstruction is often called "fall clearance," and this is a critical factor when choosing your system. Anchorage height, type of lifeline and length are just a couple of factors that will affect the required clearance needed.

LIFELINE TYPE

Synthetic lines are extremely lightweight and compact while galvanized or stainless steel options offer added corrosion and abrasion resistance.

NUMBER OF USERS

Always consider the number of workers required to get the job done and choose a system that can accommodate those personnel safely.

Most Horizontal Lifelines Equipped with






HORIZONTAL SYSTEMS

SECURASPAN™ HORIZONTAL LIFELINE SYSTEMS

Extremely lightweight and portable, these systems incorporate a modular, multi-base design that accommodates a wide range of steel and concrete beams.

- Interchangeable stanchions are ideal for both steel and concrete applications
- Extremely lightweight and portable for fast and easy set-up and use
- Single and multi-span options available for jobsite customization
- Pass thru bracket design provides 100% continuous protection
- Integrated Zorbit[™] energy absorber limits forces on structure
- Capacity of 2 workers per span, up to 6 workers for multi-span system
- Durable and corrosion resistant construction



STEEL I-BEAM APPLICATIONS

This lightweight and extremely easy to install engineered fall protection system is ideal for steel construction. Single spans up to 60 ft. and with the optional "bypass" brackets, the system can be configured to run indefinitely.

- Single clamp and wing nut design
- All adjustments made from top of beam
- Fits flanges 6" to 12" wide, 2-1/4" thick (15.2-30.5 cm, 5.7 cm)
- Optional bases for 18", 24" and 36" widths (45.7, 60.9 and 91.4 cm)

SECURASPAN[™] I-BEAM HORIZONTAL LIFELINE SYSTEM

Complete single span system includes 2 stanchions (7400047) and cable assembly with tensioner and Zorbit™ energy absorber.

7400420 20 ft. (6.1 m) SecuraSpan[™] I-beam HLL System

7400430 30 ft. (9.1 m) SecuraSpan™ I-beam HLL System

7400440 40 ft. (12.2 m) SecuraSpan™ I-beam HLL System

7400450 50 ft. (15.2 m) SecuraSpan™ I-beam HLL System

7400460 60 ft. (18.3 m) SecuraSpan™ I-beam HLL System



CONCRETE REBAR & SHEAR STUD APPLICATIONS

Provides tie-off point before decking or other fall protection is available on pre-stressed concrete beams with rebar or shear studs. Stanchions are adjustable from vertical 20 degrees left or right for easy passage, or completely horizontal for transportation to jobsite.

- Simply attach with torque wrench
- Simple chain tie-back connection
- Fits 1/2" to 1" diameter (#4 to #8 rebar) and 4" to 12" center to center

SECURASPAN™ REBAR/SHEAR STUD HORIZONTAL LIFELINE SYSTEM

Complete single span system includes 2 stanchions (7400215) and cable assembly with tensioner and Zorbit $^{\text{m}}$ energy absorber.

7400620 20 ft. (6.1 m) SecuraSpan™ Rebar/Shear Stud HLL System

7400630 30 ft. (9.1 m) SecuraSpan™ Rebar/Shear Stud HLL System

7400640 40 ft. (12.2 m) SecuraSpan™ Rebar/Shear Stud HLL System

7400650 50 ft. (15.2 m) SecuraSpan[™] Rebar/Shear Stud HLL System

7400660 60 ft. (18.3 m) SecuraSpan™ Rebar/Shear Stud HLL System



CONCRETE LOOP REBAR APPLICATIONS

An easy-to-install system for pre-stressed concrete beams, this attaches directly to the loop rebar. With integrated "bypass" brackets, the system can be configured to run indefinitely.

- Simple hook and loop with wing nut
- Fits 1/2" to 4-1/2" dia. (#4 to #12 rebar)
- Adjusts to fit 3-1/2" to 8" (8.9-20.3 cm) tall loop with 3" (7.6 cm) or greater spacing

SECURASPAN™ LOOP REBAR HORIZONTAL LIFELINE SYSTEM


Complete single span system includes 2 stanchions (7400045) and cable assembly with tensioner and Zorbit[™] energy absorber.

7400320 20 ft. (6.1 m) SecuraSpan™ Loop Rebar HLL System 7400330 30 ft. (9.1 m) SecuraSpan[™] Loop Rebar HLL System

7400340 40 ft. (12.2 m) SecuraSpan[™] Loop Rebar HLL System

7400350 50 ft. (15.2 m) SecuraSpan™ Loop Rebar HLL System

7400360 60 ft. (18.3 m) SecuraSpan™ Loop Rebar HLL System



SECURASPAN™ SYSTEM COMPONENTS

7400047 Stanchion with I-beam base, fits 6"-12"

7400055 Stanchion with I-beam base, fits 12"-18"

7400056 Stanchion with I-beam base, fits 18"-24"

(15.2-30.5 cm) flange

(30.5-45.7 cm) flange

(45.7-61 cm) flange

(61-91.4 cm) flange

7400052 I-beam base only, fits 6"-12" (15.2-30.5 cm) flange 7400008 Intermediate bypass bracket kit



I-BEAM SYSTEM COMPONENTS



REBAR SYSTEM COMPONENTS

7400215 Stanchion with rebar/shear stud base, pass thru and end anchor brackets

7400214 Tie-back base and chain assembly

7400053 End-anchor retro-fit kit with rebar/shear stud base, tie-back assembly, end-anchor and pass thru bracket

7400057 Stanchion with I-beam base, fits 24"-36" 7400054 Intermediate retro-fit kit with rebar/shear stud base and pass thru bracket



LOOP **SYSTEM COMPONENTS**

7400045 Stanchion with loop rebar base and pass thru bracket

CLEARANCE CHART

SPAN LENGTH	1-2 USERS 6' (1.8 m) LANYARD	1-2 USERS SRL					
20-30 ft. (6.1-9.0 m)	16'-7" (5.1 m)	13'-2" (4 m)					
50-60 ft. 20'-2" 16'-8" (15.4-18.5 m) (6.2 m) (5.1 m)							

LIFELINE OPTIONS FOR ALL SYSTEMS

Cable assembly with turnbuckle and Zorbit™, lengths available in 10 ft. increments. Cable assemblies over 60 ft. (18.3 m) include two Zorbit™ devices.

20 ft.	30 ft.	40 ft.	50 ft.	60 ft.	70 ft.	80 ft.	90 ft.
(6.1 m)	(9.1 m)	(12.2 m)	(15.2 m)	(18.3 m)	(21.3 m)	(24.4 m)	(27.4 m)
7403020	7403030	7403040	7403050	7403060	7403070	7403080	7403090
100 ft.	110 ft.	120 ft.	130 ft.	140 ft.	150 ft.	160 ft.	170 ft.
(30.5 m)	(33.5 m)	(36.6 m)	(39.6 m)	(42.7 m)	(45.7 m)	(48.8 m)	(51.8 m)
7403100	7403110	7403120	7403130	7403140	7403150	7403160	7403170
180 ft.	190 ft.	200 ft.	210 ft.	220 ft.	230 ft.	240 ft.	250 ft.
(54.9 m)	(57.9 m)	(61.0 m)	(64.0 m)	(67.1 m)	(70.1 m)	(73.2 m)	(76.2 m)
7403180	7403190	7403200	7403210	7403220	7403230	7403240	7403250
260 ft.	270 ft.	280 ft.	290 ft.	300 ft.	310 ft.	320 ft.	330 ft.
(79.8 m)	(82.3 m)	(85.3 m)	(88.4 m)	(91.4 m)	(94.5 m)	(97.5 m)	(100.6 m)
7403260	7403270	7403280	7403290	7403300	7403310	7403320	7403330





7605060

EZ-LINE™ RETRACTABLE HORIZONTAL LIFELINE SYSTEM

 $\mathsf{EZ}\text{-}\mathsf{Line}^{\mathsf{TM}}$ is user friendly and extremely fast to install, remove and store. The innovative retractable design of $\mathsf{EZ}\text{-}\mathsf{Line}^{\mathsf{TM}}$ eliminates large and bulky coils of cable that are difficult to set-up, relocate and store.



- Built-in winch for fast and easy set-up, use and dismantling
- Customize length in any increment up to 60 ft. (18.25 m)
- Built-in pre-tension and impact indicators for easy set-up and inspection
- Extremely lightweight, 33% lighter than conventional systems
- Capacity of 2 workers

CLEARANCE CHART

SPAN LENGTH	2 USERS 6' (1.8 m) LANYARD	2 USERS SRL				
20-30 ft. (6.1-9.0 m)	21'-6" (6.6 m)	9'-10" (3.0 m)				
50-60 ft. (15.4-18.5 m)	12'-4" (3.8 m)					
NOTE: See product instruction manual for complete clearance information.						

SAYFLINE™

CABLE HORIZONTAL LIFELINE SYSTEMS

The Sayfline™ cable system is highly portable and ideal for situations where welding, sparks or harsh environments are present, or where minimal clearance exists. Complete system includes cable lifeline assembly with wedge grip termination, tensioner and Zorbit™ shock absorber.

- Durable all-metal system can be left in place for long periods of time
- Portable system can be re-used over and over again
- Cable lifeline with tensioner and shock absorber
- Use with any 5,000 lb. (22kN) anchorage devices
- Capacity of 2 workers
- 20 ft. to 100 ft. lengths available (6.1 m to 30.5 m)



CLEARANCE CHART

SPAN LENGTH	1-2 USERS 6' (1.8m) LANYARD	1-2 USERS SRL				
20-30 ft. (6.1-9.0 m)	20'-6" (6.3 m)	9'-1" (2.8 m)				
50-60 ft. (15.4-18.5 m)	24'-5" (7.4 m)	12'-5" (3.8 m)				
NOTE: See product instruction manual for complete clearance information.						

SAYFLINE™ CABLE HLL SYSTEMS

20 ft. (6.1 m)	30 ft. (9.1 m)	40 ft. (12.2 m)	50 ft. (15.2 m)	60 ft. (18.3 m)	70 ft. (21.3 m)	80 ft. (24.4 m)	90 ft. (27.4 m)	100 ft. (30.5 m)	
7602020	7602030	7602040	7602050	7602060	7602070	7602080	7602090	7602100	

SAYFLINE™ SYNTHETIC HORIZONTAL LIFELINE SYSTEMS

Sayfline™ systems are extremely lightweight, easy to install and portable—ideal for maintenance, bridge work, construction and general industry applications, providing absolute safety and reliability.

- Complete system in convenient bag is installed with no special tools or equipment
- Portable system can be re-used over and over again
- Kernmantle rope lifeline with tensioner and shock absorber
- Two tie-off adaptors are included to anchor the system to a structure
- Capacity of 2 workers
- 20 ft. to 100 ft. lengths available (6.1 m to 30.5 m)





SPAN LENGTH	2 USERS 6' (1.8m) LANYARD	2 USERS SRL				
20-30 ft. (6.1-9.0 m)	23'-4" (7.1 m)	11'-6" (3.5 m)				
50-60 ft. (15.4-18.5 m) 30'-2" (9.2 m) 18'-3" (5.5						
NOTE: See product instruction manual for complete clearance information.						

SAYFLINE™ SYNTHETIC HLL SYSTEMS

20 ft. (6.1 m)	30 ft. (9.1 m)	40 ft. (12.2 m)	50 ft. (15.2 m)	60 ft. (18.3 m)	70 ft. (21.3 m)	80 ft. (24.4 m)	90 ft. (27.4 m)	100 ft. (30.5 m)
7600502	7600503	7600504	7600505	7600506	7600507	7600508	7600509	7600510



SECURASPAN™ POUR-IN-PLACE HORIZONTAL LIFELINE SYSTEMS

The Pour-in-Place SecuraSpan™ system installs to column tops, providing an overhead tie-off point during the decking process. The stanchion slides into the embedded pour-in-place sleeve and does not require "tie-back" for fast installation.

- Lightweight and portable for fast and easy set-up and use
- Single and multi-span options with unlimited length for jobsite customization
- Pass thru design provides 100% continuous protection
- Integrated Zorbit™ energy absorber limits forces on worker and structure
- Capacity of two workers per span, up to six workers for multi-span system
- Durable and corrosion resistant construction

SAYFLINE™ POUR-IN-PLACE HLL SYSTEMS

Complete system includes 2 stanchions (7400203), and cable assembly with tensioner and Zorbit $^{\text{TM}}$ energy absorber.

20 ft. (6.1 m)	30 ft. (9.1 m)	40 ft. (12.2 m)	50 ft. (15.2 m)	60 ft. (18.3 m)
7400220	7400230	7400240	7400250	7400260

SECURASPAN™ POUR-IN-PLACE ACCESSORIES

7400203 Stanchion assembly, 7'6" tall

7400200 Intermediate bracket, Pour-In-Place stanchion

7400201 Concrete sleeve for Pour-In-Place stanchion



CLAMP-ON VERTICAL BASE
Zinc-plated steel construction,
clamps to existing vertical steel
and concrete structures.



BOLT-ON VERTICAL BASE
Zinc-plated steel construction,
bolts to vertical steel and
concrete structures.



WELD-ON VERTICAL BASE
Steel c-channel construction,
weld to vertical steel structures.

7400222



CLEARANCE CHART

NOTE: See product instruction manual for complete

1-2 USERS SRI

9'-1" (2.8 m)

12'-5" (3.8 m)

SPAN LENGTH

20-30 ft. (6.1-9.0 m)

50-60 ft. (15.4-18.5 m)

clearance information.

8530267
BOLT-ON FLOOR BASE
Zinc plated steel construction.
Bolts to steel and concrete
horizontal surfaces.

HORIZONTAL LIFELINE COMPONENTS

The revolutionary Zorbit™ energy absorber and wedge grip termination featured on our Sayfline™ cable horizontal lifeline system is also available to customize your existing system. A competent and qualified person must be involved who fully understands how to properly engineer a custom system.

- Allows use of standard 5,000 lb. (22kN) rated anchors
- Lightweight and compact for easy set-up and use
- Simple design makes integration into system fast and easy




7∩PRIT™ KITS

/401013	Zorbit™ energy absorber only
7401031	Zorbit™ energy absorber, 2 shackles, bolts, nuts
7401032	Zorbit [™] energy absorber, with 2 shackles, bolts, nuts, turnbuckle
7401033	Zorbit [™] energy absorber, with 2 shackles, bolts,

7401033 Zorbit™ energy absorber, with 2 shackles, bolts, nuts, turnbuckle, thimbles, cable clips

7600580 Zorbit™ energy absorber, with 2 shackles, bolts, nuts, turnbuckle, thimbles, cable clips with wedge grip, two o-rings

7608008 Wedge grip horizontal lifeline termination

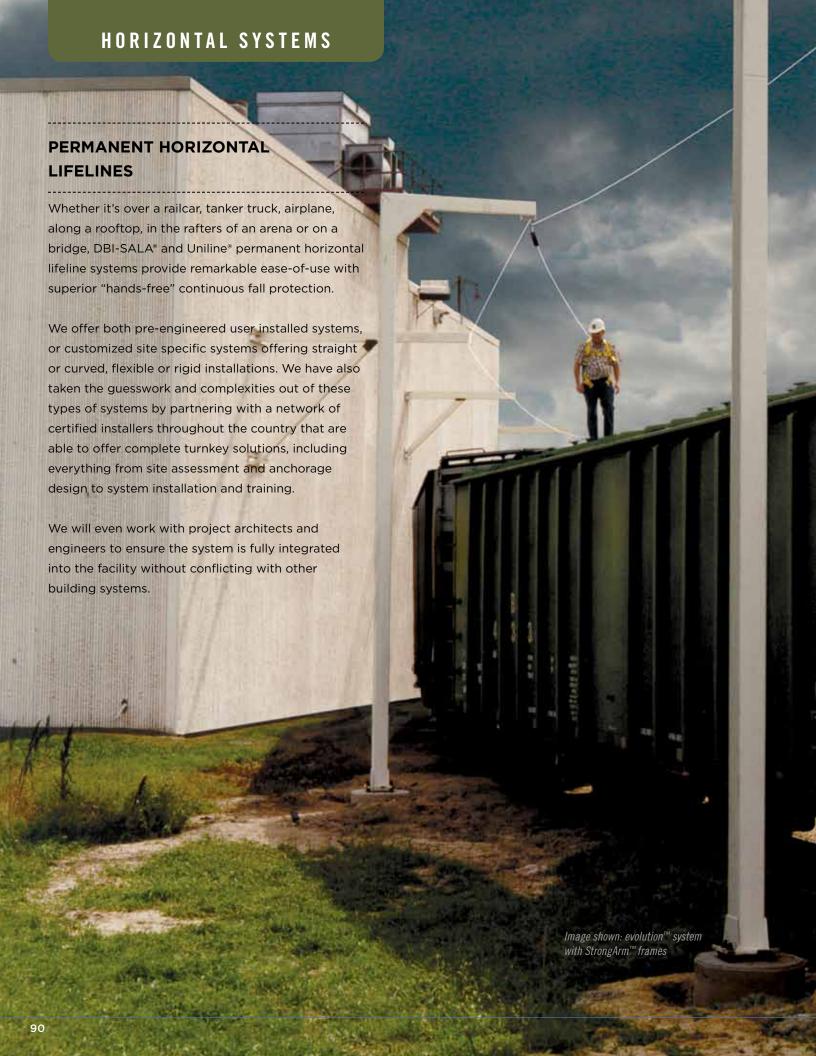







SAYFLINE™ MULTI-SPAN HORIZONTAL LIFELINE SYSTEMS

The Multi-Span Sayfline[™] system is a simple and safe "off-the-shelf" permanent horizontal lifeline system designed for user installation. It is completely customizable, including span length, total system length and even final installation position.

- Provides 100% continuous protection for two workers
- Unique one-piece sleeve bypasses intermediates hands-free
- Customize to suit jobsite, 180 ft. (54.9 m) max length, 30 ft. (9.1 m) max span
- Unique brackets can be installed above, even with or below the user
- System includes lifeline, intermediate bracket (one per 30 ft. span), termination hardware, tensioner and two Zorbit™ energy absorbers. Order sleeve and additional intermediates separately.


SAYFLINE™ ACCESSORIES

7608001 Intermediate bracket, multi-span system

7608002 Sayflink™ sleeve for Sayfline™ multi-span system

SAYFLINE™ MULTI-SPAN HLL SYSTEMS

40 ft.	60 ft.	80 ft.	100 ft.	120 ft.	140 ft.	160 ft.	180 ft.
(12.2 m)	(18.3 m)	(24.4 m)	(30.5 m)	(36.6 m)	(42.7 m)	(48.8 m)	(54.9 m)
7603040	7603060	7603080	7603100	7603120	7603140	7603160	7603180

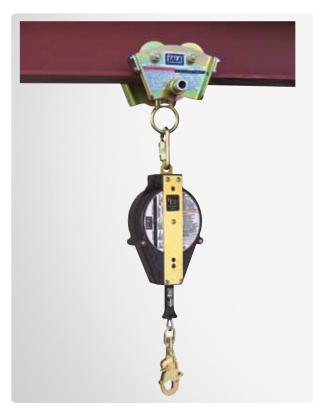

I-BEAM AND TROLLEY SYSTEM

Our man-rated trolleys provide continuous horizontal mobility on I-beams. Used in conjunction with a self retracting lifeline,

the system provides fall protection with horizontal and vertical mobility. These systems can often be used on existing overhead I-beams, and they're sometimes the only choice when it is not possible to accommodate



the loads generated by a cable type multi-span horizontal lifeline system. In addition, rigid systems eliminate sag and deflection, reducing the overall fall clearance needed below the work area. See page 95 for further details on the trolley.



Capital Safety's Uniline® range of horizontal fall protection products was developed to provide a choice of solutions that allow our customers to most effectively resolve the risks associated with work at height in a wide range of applications, and comply with workplace safety regulations. Regardless of your situation, you benefit from the same high standards of service, technical support and product quality.

UniRail™ is ideal for building projects—particularly internal and external façade access, inspection and maintenance including walkways, and suspended gantries. It's also ideal for suspended rope access work, as it meets the requirements of both abseil and fall protection standards.

- 6000 Series Aluminium Alloy components ensure a quality safety system that will withstand harsh environments
- A discrete design and range of fixing brackets ensure design flexibility and offer concealed fixing solutions to complement building aesthetics
- UniRail™ can span up to 10 ft.
 (3 m) between structural support brackets, using a range of anchorage brackets which adapt to site conditions —and the system can be fitted to steel beams, concrete and brickwork
- UniRail™ can accommodate virtually any building design or structure, thanks to its capacity to navigate corners and contours in the building





UniRail™



Uni-8[™] is best suited to modern building projects and refurbishments but can also be used for industrial safety applications. Minimal moving parts and high grade materials ensure long life expectancy, low cost of ownership and add up to a sound investment.

Uni-8[™] can be fitted to steel beams, concrete and brickwork and is suited for use on older roof constructions in conjunction with fabricated anchor points.

- High quality 316 stainless steel cable fall protection system offers excellent freedom of movement
- Navigates corners and building contours
- In-line energy absorbers protect buildings and

structures


- Spans up to 39.36 ft. (12 m) between intermediate supports
- Supports multiple workers for both fall arrest and work restraint applications
- Anchor conforms to EN 795, OSHA, ANSI, AUS/NZ standards and has been tested to both EN795 Class A and C standards

The Uni-8™ Overhead fall protection system was primarily developed to meet the needs of transport and industrial customers including lorries, trains and aircraft, crane walkways and loading bays.

The system has also solved access and safety problems in the entertainment and arena industry. This quality safety solution can support heavy fall arrest and controlled rate descent devices, and ensures free and unhindered movement for the worker when carrying out work at height.



- Electro-polished components and 1" x 19" stainless steel cable provide long-term corrosion resistance
- Free-running attachment carriage ensures complete freedom of travel and movement for the user
- In-line energy absorbers reduce load transfer to the structure in the event of a fall
- Available as a single or multi-span system

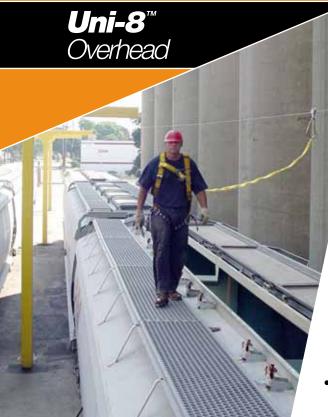



RoofSafe[™] Lo-Profile Rail is a quality extruded aluminum rail system, which provides a high level of user safety combined with an aesthetically pleasing appearance. Specifically designed for use on jet bridges, this system permanently attaches and allows the jet bridge to expand and collapse with no need to remove or retention.

- High capacity shock absorbing lanyard included is ideal for tying off at feet—twin-leg design provides continuous protection and mobility when moving from one jet bridge section to another
- High performance rail shuttle provides smooth operation with ultra-efficient movement along the rail providing hands-free protection
- Low profile rail design will pass under jet bridge structure when it is expanded and collapsed, so there is no need to remove or retention the system



RoofSafe Rail

RoofSafe[™] Rail is a quality extruded aluminium rail system, providing a high level of user safety combined with a discreet, aesthetic appearance. It offers excellent functionality through its free-flowing attachment carriage and, with no brackets to pass over, the user enjoys a truly hands-free experience.

- Roofsafe[™] Rail is the only direct-to-roof rail system that can facilitate changes in direction and roof slopes, ensuring continuous, safe roof access
- Roofsafe™'s low profile and discreet design is unobtrusive—building appearance won't be compromised by anchors and cables
- Four-wheel attachment carriage runs effortlessly along the extruded aluminium rail, making the system user-friendly
- System can be fitted to built-up metal profiled roofs and standing seam roofs—and can support multiple workers for both fall arrest and work restraint applications






The Uniline RoofSafe[™] Anchor from Capital Safety is designed to eliminate or substantially reduce the risk of injury or death to operators working at height—while ensuring the integrity of the structure to which it's attached.

- NEW SpiraTech™ Force Management technology provides the lowest distributed load to the roof system
- Maximum end load in a multiuser fall will be less than 6kN.
- NEW Toggle fitting system, for a faster, more cost effective installation and improved thermal efficiency
- The RoofSafe[™] Anchor to be installed on a wide variety of old and new roof types without risk to structural integrity
- Can be installed on standing seam, composite and built-up roofing systems, and multiple flat roofing and membrane roofing systems
- System can be used for either work restraint or fall arrest applications
- Anchor conforms to EN 795, OSHA, ANSI, AUS/NZ, standards and tested to both EN795 Class A and C Standards







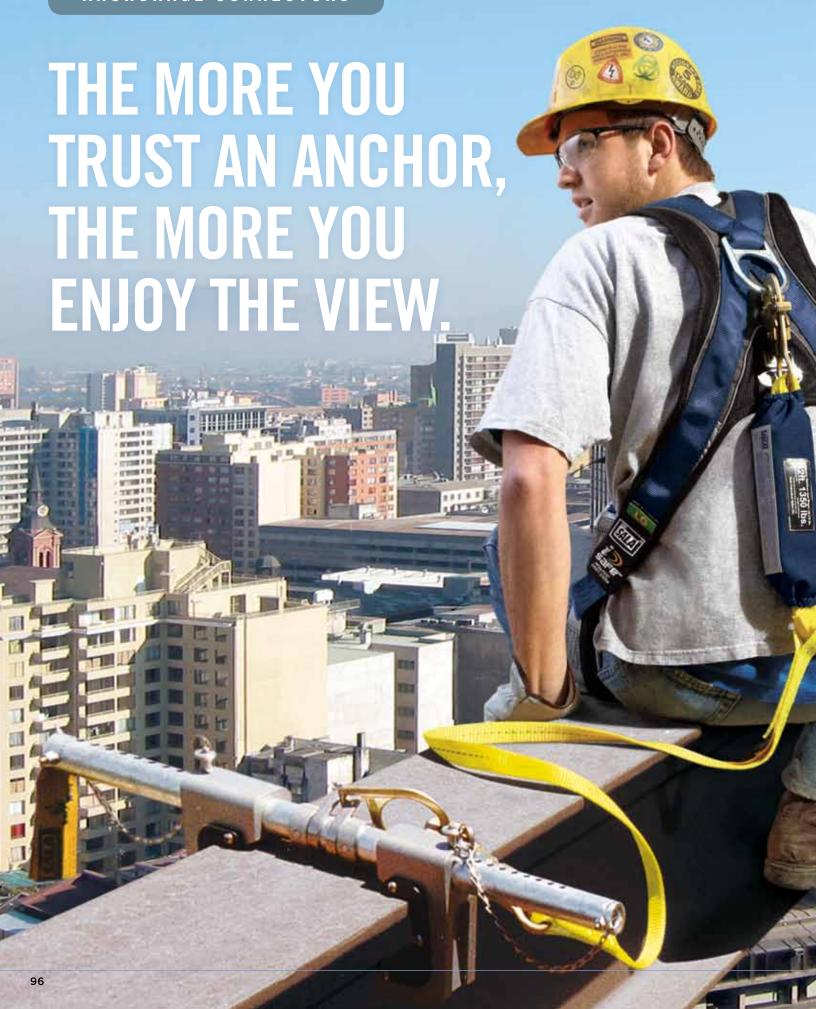



ANCHORAGE CONNECTORS

TYPES OF ANCHORS

Your choice of anchor depends on the type of work being done. Anchorages are sold by what they connect to (general/all purpose, steel, concrete, roof or specialty), whether they are fixed or mobile, and whether they are permanent or portable. They all must provide a secure point of attachment for a complete personal fall arrest system, and must be capable of supporting a load of 5,000 lbs. (22kN) or of meeting OSHA's criteria of a 2-to-1 safety factor.





Portable anchors used in a variety of applications. Many are "choker" style, designed to provide a safe and easy way to anchor a fall protection device to an overhead location that is beyond normal reach.

STEEL

Our anchors for steel are lightweight and easily installed. A variety of portable, permanent, mobile and fixed anchors are available for connection to I-beams and other steel structures.

CONCRETE

These rugged and extremely abrasive resistant portable and permanent anchors are specifically designed to be attached to concrete structures including walls, floors, decks and columns.



A variety of portable and permanent roof anchors for residential and commercial, as well as for flat or sloped roofs, are available. These specialized anchors will keep you safe without causing damage to the structure.



SPECIALTY

Specifically designed to attach to challenging anchorage structures, these devices are unique. If you can't find a suitable anchor for your application, call us and we'll work together to provide a solution.

GENERAL

Extremely versatile anchors are simply choked-off to the anchorage structure, to provide a fast and safe 5,000 lb. (22kN) tie-off point for your personal fall protection system.

1003000

WEB TIE-OFF ADAPTOR

Pass thru design. 1-3/4" polyester strength member with 3" wide polyester wear pad x 3 ft. (0.9 m).

1003006 Web tie-off adaptor, pass thru type x 6 ft. (1.8 m)

1002103 Adjustable web tie-off adaptor, pass thru type x 3 ft. (0.9 m)

1002106 Adjustable web tie-off adaptor, pass thru type x 6 ft. (1.8 m)

1002202

KEVLAR® TIE-OFF ADAPTOR

Kevlar® web is ideal for high heat environments, pass-thru type with 1-3/4" polyester strength member x 6 ft. (1.8 m).

1002200 Kevlar® tie-off adaptor, pass thru type x 3 ft. (0.9 m)

1002201 Kevlar® tie-off adaptor, pass thru type x 4 ft. (1.2 m)

5900550

CABLE TIE-OFF ADAPTOR

Pass thru design, 7x19-3/8" (9.5mm) stainless steel cable with 0-rings x 4 ft. (1.2 m).

5900551 Cable tie-off adaptor, pass thru type x 6 ft. (1.8 m)

1201390

WEB SCAFFOLD CHOKER

Choker style attaches to 3" (76 mm) diameter anchorage. 1" (25 mm) polyester strength member x 17" (43 cm).

1201391 Web scaffold choker x 24" (61 cm).

SAFLOK™ CARABINERS

Saflok[™] carabiners are the unsung heroes of most safety systems. They securely attach one component to another and offer maximum strength -5,000 lb. (22kN) minimum breaking strength and 3,600 lb. (16kN) gate strengths. Designed for easy securing, they are self closing and self locking to keep all components of your safety system firmly attached, including you!

2000112

SAFLOK™ CARABINER

Steel carabiner with 3,600 lb. (16kN) self closing/locking gate, 11/16" (17.5 mm) opening.

2000113

SAFLOK™ CARABINER

Steel carabiner with 3.600 lb. (16kN) self closing/locking gate, 1-3/16" (30 mm) opening.

2000114

SAFLOK™ CARABINER

Steel carabiner with 3,600 lb. (16kN) self closing/locking gate, 2-3/16" (55.5 mm) opening.

2000200

SAFLOK™ CARABINER

Stainless steel carabiner with 3,600 lb. (16kN) self closing/locking gate, 11/16" (17.5 mm) opening.

2000300

SAFLOK™ CARABINER

Steel carabiner with 3,600 lb. (16kN) self closing/ triple-action locking gate, 2" (50.8 mm) opening.

2000301

SAFLOK™ CARABINER

Stainless steel carabiner with 3.600 lb. (16kN) self closing/triple-action locking gate,







ANCHORAGE CONNECTORS

STEEL ANCHORAGE CONNECTORS

Extremely versatile anchors for steel are lightweight and compact, providing an easy to install and safe 5,000 lb. (22kN) tie-off point for your personal fall protection system.



GLYDER™ 2 SLIDING BEAM ANCHOR


Provides complete horizontal mobility on I-beams, attach overhead or at your feet (use with $Force2^{TM}$ shock absorbing lanyard when used at your feet).

- Wear pads eliminate metal-to-metal contact, for smooth operation
- Integrated ratcheting adjustment system for easy installation
- Dual beam grip adjustment prevents twisting and turning
- Extremely lightweight at only 3.7 lbs. (1.66 kg)
- User capacity of 420 lbs. (189 kg)
 Fits flange 3-1/2" to 14" wide and up to 1-1/4" thick

2110941

GLYDER™ SLIDING BEAM ANCHOR

The original Glyder^m has most of the features of Glyder^m 2, except the adjustment system is detent pin type and fits larger beam sizes. Fits flange 6"-18" wide and up to 2-1/2" thick.

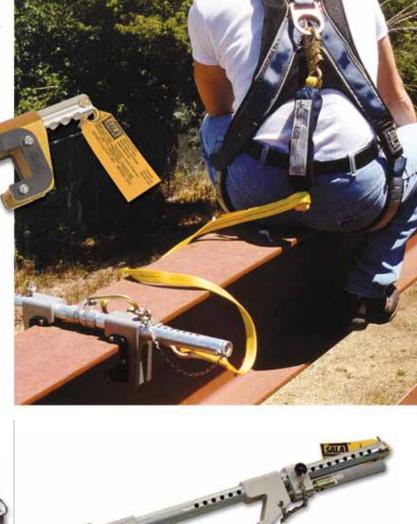

2108406

TIVED DEAM ANOUGD

FIXED BEAM ANCHOR

It installs in seconds to the beam structure in any orientation, with final tightening using a built-in adjustment handle. Ideal as a single-person anchor point or as end-anchors for a Sayfline horizontal lifeline system. Fits up to 1-1/2" thick beam flange, 2-1/2" to 12" wide.

2108407 Fixed Beam Anchor, fits up to 1-1/2" thick x 2-1/2"-18" wide beam flange

2108408 Fixed Beam Anchor, fits up to 1-1/2" thick x 2-1/2" -24" wide beam flange

2108410 Fixed Beam Anchor, fits up to 1/2" to 2-1/2" thick x 12"- 36" wide beam flange

TROLLEY FOR I-BEAM

The trolley is for use with self retracting lifelines on horizontal beams and has been engineered for ease-of-use and superior performance. Glides effortlessly along the beam and provides horizontal mobility.

- Attachable anywhere along beam, including midpoint
- Non-corrosive double-shielded wheel bearings are maintenance free
- Trolley Guards protect the wheels from damage and keep beam clear of debris
- Fits 3" to 8" flange width thickness up to 11/16"

2103147 Trolley for I-Beam, all stainless steel, fits 3" to 8" flange width thickness up to 11/16"

2101630

D-RING ANCHORAGE PLATE

The D-ring anchorage plate can be bolted or welded to a structure, offering a compact, reliable connection point for your fall protection system.

- Two ½" diameter attachment holes
- Cadmium plated steel D-ring
- 304 stainless steel anchorage plate
- Plate size: 1/4" x 2" x 4-1/2"

2101634 D-ring Anchorage Plate with cadmium plated steel D-ring, raw steel anchorage plate

2101636 D-ring Anchorage Plate with 304 stainless steel D-ring and anchorage plate

2101638 D-ring Anchorage Plate with 316 stainless steel D-ring and anchorage plate

2104550

STEEL PLATE ANCHOR

This plate anchor offers a compact, reliable attachment to 3/8" to 1" thick plate steel for connecting your lanyard, vertical lifeline system or self retracting lifeline.

- Easy to use set-screw design ensures positive and safe connection
- Complete with integral D-ring tie-off point
- Durable, corrosion resistant zinc plated steel construction





CONCRETE

ANCHORAGE CONNECTORS

Extremely versatile anchors for concrete are lightweight and compact, providing an easy-to-install and safe 5,000 lb. (22kN) tie-off point for your personal fall protection system.

2100085

SAFLOK™ CONCRETE WEDGE ANCHOR

Portable and reusable concrete anchor installs quickly and easily using standard concrete tools, providing a fast and safe tie-off point.

- Exclusive quick-release button for fast removal
- Unique forged connection ring provides a compatible tie-off point
- Shielded load cable and chock release cables
- Exclusive pivoting easy-grip handle

2100101

SAFLOK™ TOGGLE ANCHOR

Portable and reusable anchor installs in just seconds to concrete or steel for horizontal, vertical, or overhead applications, providing a compatible, fast and safe tie-off point.

- Activator cable provides toggle mode selection (Open or Lock)
- Toggle position indicator visually notifies user if locked or unlocked
- Swiveling D-ring provides a compatible tie-off point

2100050

CONCRETE ANCHOR STRAP

Our disposable concrete anchor strap provides a temporary anchorage on concrete forms and is extremely easy to install and use.

- Loop slips over rebar, then concrete is poured over
- When no longer needed, simply cut strap and discard
- Durable 1-3/4" polyester construction x 3-1/2 ft. (1 m)
- Full length wear pad for abrasion resistance
- D-ring provides compatible tie-off point

2100053 Concrete anchor strap with D-ring, 48" (1.2 m)

2100061 Concrete anchor strap, no D-ring, 3-1/2 ft. (1 m)



2104560

CONCRETE D-RING ANCHOR

A simple, versatile and safe concrete anchor solution for use in temporary or permanent applications provides a safe tie-off point.

- Reusable D-ring assembly
- Rugged design for harsh environments
- Safe "hook-up" indicator notifies user of proper installation
- Install into 11/16", 18mm or 3/4" holes only standard drill bits needed

2104561 Concrete D-ring Anchor with 5 additional bolts

2104562 Concrete D-ring Anchor with 11 additional bolts

2100066 10-pack of replacement bolts for concrete D-ring anchor

2101004

CONCRETE DETENT ANCHOR

A versatile, simple and safe concrete anchor utilizing pre-installed sockets enables the user to connect and disconnect from the anchorage by simply pressing a button.

- Use for floor, wall or ceiling type applications
- Provides convenient tie-off points wherever needed
- Push-button operation for fast and easy operation
- Socket includes cover cap to hide recess, blending into the decor

2101000 Concrete detent socket and cap only

2101002 Concrete detent pin only







8523178

CONCRETE PARAPET ANCHOR

Portable anchorage connector developed for use in locations where a low parapet wall provides an anchor site for a shock absorbing lanyard or self retracting lifeline.

- Non-penetrating design eliminates site damage
- Adjustment range 1" to 14.5" wide
- No tools required for installation



1231305

SAFLOK MAX™ WEB ANCHOR

Anchor can be directly connected to many concrete wall forms to provide a tie-off point for your system. Web anchor strap with large opening, Saflok Max^TM hook at one end, D-ring at other x 1.5 ft. (45 cm).



ROOF ANCHORAGE CONNECTORS

When you're out on the wood or steel roof of a residential or commercial structure, whether flat or sloped, your fall protection system needs specialized components to keep you safe without causing damage to the structure. Our easy-to-use kits and anchorage devices provide the perfect solution and meet the latest OSHA and ANSI standards.

2104168

ROOFER'S FALL PROTECTION KIT

Complete fall protection system in a bag for convenient compliance and safety on the job. Kit includes:

- Reusable Roof Anchor (2103673)
- Full Body Harness (1103513)
- Rope Adjuster with Shock Absorbing Lanyard (1224005)
- Lifeline x 50 ft. (1202794)
- Counterweight (5901583)
- Carrying Bag (9511597)

2104169 Roofer's Fall Protection Kit with 2103676 Roof Anchor

7611907

TWO-PERSON ROOFER'S FALL PROTECTION KIT

Complete fall protection system in a bag for convenient compliance and safety on the job. Kit includes:

- Two Delta[™] Full Body Harnesses (1103513)
- 50 ft. Sayfline[™] HLL System with Two 2103673 Reusable Roof Anchors (7600511)
- Two Rope Adjusters with Shock Absorbing Lanyards (1224005)
- Two 50-ft. Lifelines (1202794)
- Two Counterweights (5901583)
- Two Carrying Bags (9511597 / 9506162)

7611904 One-Person 50-ft. Sayfline™ HLL System, rope adjuster with shock absorbing lanyard, two reusable roof anchors and carrying bag.

7600511 50-ft. Sayfline™ HLL System with two reusable roof anchors and bag onlyfor two people.



2105683

REUSABLE SWIVELING ROOF ANCHOR

Provides 360 degrees of mobility and protection on sloped or flat wood and metal decking. For use with 30 ft. 3504430 or 50 ft. 3504450 Ultra-Lok™ SRL (order separately). May also be used as end-anchors for horizontal



3505694

REUSABLE SWIVELING ROOF ANCHOR

Provides 360 degrees of mobility and protection on sloped wood roofs. Includes 30 ft. 3504430B Ultra-Lok™ SRL.



2103673

PORTABLE REUSABLE ROOF ANCHOR

For use on flat or sloped wood roofs. Installs with twelve 16D nails or six 1/4" x 2-1/2" bolts. Can be used with horizontal lifeline systems for added versatility.



2103676

PORTABLE REUSABLE ROOF ANCHOR

For use on flat or sloped wood roofs. Installs with 20 ea. 16D nails. Simple hinge style design is extremely easy to transport, install, dismantle and store.



2103677

PORTABLE REUSABLE ROOF ANCHOR


For use on flat or sloped wood roofs. Installs with three grade 5, 5/16" x 3" min. lag screws. Compact design is extremely easy to transport, install, dismantle and store.



2104541

DETACHABLE ROOF ANCHOR WITH FLASHING

Removable D-ring assembly allows you to leave behind the clamp assembly and then shingle over it, reusing the D-ring at another location. Fits 2x6 to 2x8 roof truss, joist or rafter.





2103670

PERMANENT ROOF ANCHOR WITH **FLASHING AND CAP**

Clamps onto roof truss up to 2x8 size and comes complete with flashing to prevent leakage and D-ring cap for aesthetics. Provides fall protection during initial construction as well as for future homeowner.



2103671 Permanent Roof Anchor with Flashing and Cap, fits 2x10 to 2x12

2103675

PORTABLE/REUSABLE STANDING SEAM ROOF ANCHOR


Attaches to sloped or flat structural standing seam roofs. Telescoping adjustment fits 24", 30", 32" and 36" seam spacing. Swivels 360 degrees and designed for use with Ultra-Lok™ Leading Edge SRL (order SRL separately).



7255000

FREESTANDING COUNTERWEIGHT ANCHOR

Freestanding system is easily placed



7200439 45 lb. (20 kg) Single Replacement Counterweight

2100139

ROOF TOP ANCHOR FOR MEMBRANE TYPE ROOFS

All assembled kits include a baseplate and an integrated anchorage point for one user fall arrest. Permanent anchor assembly fastens through the membrane (up to 12", 300 mm), insulation and into the metal sheathing, wood sheathing or concrete.

2100140 Anchor for PVC Roofs

2100142 Anchor for Bitumin Roofs

2100133

ROOF TOP ANCHOR WITH EXTRA LARGE BASEPLATE FOR METAL. CONCRETE AND WOOD

All assembled kits include an extra large baseplate and an integrated anchorage point for one user fall arrest. Permanent anchor assembly is designed for 26 gauge or thicker corrugated metal decking with ribs 10" (254 mm) to 20" (508 mm) apart, 5/8" (16 mm) CDX plywood or concrete.

2100138

STANDING SEAM ROOF ANCHOR

Kit includes a baseplate and an integrated anchorage point for one user fall arrest. Permanent anchor assembly designed specifically for standing seam roofs.



NOTE: A supplement of fasteners, clamps and rivets are readily available for installation on a variety of roofing profiles.

SPECIALTY

ANCHORAGE CONNECTORS

These specialty anchors combine ease-of-use and strength to provide fall protection safety to match the task. They all have been rigorously tested to meet or exceed industry standards.

MOBI-LOK™ SELF CONTAINED VACUUM ANCHOR SYSTEMS

Provides a tie-off point on virtually any smooth, non-porous surface simply by flipping a switch and waiting for the green light.

- Fall arrest tested and approved, meeting OSHA, CE and AS/NZS
- Lightweight design (under 20 lbs.) for easy transport
- Fail-safe back-up systems with audio alarms and vacuum level indicator
- Rubber seals secure anchor without damaging surface
- Can be used with horizontal lifeline systems for added mobility for two workers

2200095

MOBI-LOK™ FOR GENERAL INDUSTRY

Self-contained vacuum anchor assembly with bottle attachment and carrying case. It is powered up with a single, on-board 48-cubic-inch compressed gas bottle (order separately) or a large capacity detached bottle, or shop air. Unit can also power one additional secondary pad.

2200094 Mobi-Lok™ general industry self contained vacuum anchor without bottle attachment

2200096 Mobi-Lok™ general industry self contained vacuum anchor secondary pad

2200108

MOBI-LOK™ FOR AVIATION INDUSTRY

Self-contained vacuum anchor assembly with bottle attachment and carrying case. It is powered up with a single, on-board 48-cubic-inch compressed gas bottle (order separately) or a large capacity detached bottle, or shop air. Unit can also power one additional secondary pad.

- EPDM rubber seals are Skydrol resistant.
- Aviation rated electronics are intrinsically safe.

2200107 Mobi-Lok™ aviation industry self-contained vacuum anchor without bottle attachment

2200109 Mobi-Lok™ aviation industry self-contained vacuum anchor secondary pad

Mobi-Lok $^{\rm M}$ 4-man 100 ft. (30 m) and 150 ft. (45 m) systems also available featuring twin horizontal lifeline systems.

turing twin horizontal lifeline systems. MOBI-LOK™ ACCESSORIES

2200078 Compressed

Compressed gas cylinder



2200086

Fill station, fills compressed gas cylinder 2200078 from bulk nitrogen cylinder.



2200130

Secondary pad hose x 50 ft. (15 m). For connecting secondary pads to self-contained vacuum anchor.



1225013

FORCE2[™] shock absorbing lanyard with web loop choker at one end, aluminum carabiner at other x 6 ft. (1.8 m).



2200400

2200108

Sayfline[™] horizontal lifeline system x 40 ft. (12 m). For connection between two or more pads to create continuous protection for two workers.









SAFLOK™ WOOD POLE AND STEEL STRUCTURE ANCHOR SYSTEMS

2104801

Provides wood pole climber with 100% fall protection, allowing installation of anchor and lifeline to top of pole from the ground. Quickly and safely climb prior to connecting work positioning system.

• Compatible with most hot stick poles

- Includes anchor tube with installation/removal tool
- dielectric rope and two carabiners
- Rope grab with shock absorbing lanyard
- Chain tensioner, web loop and carrying bag



2104810 Saflok™ Steel Structure Fall Arrest System with anchor tube, installation/removal tool, 80 ft. (24 m) 5/8" (16 mm) high dielectric rope, carabiner, rope grab with shock absorbing lanyard, rescue loop sling and carrying bag.

FIRST-MAN-UP REMOTE **ANCHORING SYSTEM**







2104527

Provides a safe means to anchor a fall protection device to an overhead location beyond normal reach.

- Pole adjusts from 6 to 12 ft. (1.8 to 3.6 m)
- Tie-off adapter tool for installation of anchorage device
- Hook attachment tool for installation of 3,600 lb. gated snap hooks
- Tie-off adapter x 3 ft. (0.9 m) and carrying bag

2104528 First-Man-Up[™] System with 8-16 ft. (2.4-4.8 m) adjustable pole

2104529 Snap hook connector tool for 3,600 lb. gated hooks

2104530 First-Man-Up[™] System, 6-12 ft. (1.8-3.6 m) adjustable pole with original and 3,600 lb. gated hook tools

2104531 First-Man-Up[™] System, 8-16 ft. (2.4-4.8 m) adjustable pole with original and 3,600 lb. gated hook tools



Freestanding, non-penetrating anchor is ideal for concrete decking construction and provides overhead anchorages for up to 2 users.

- Large foam filled trailer tires won't go flat and will provide easy movement
- Rotating 7.5 ft (2.3 m) mast and anchorage arm for added freedom of movement
- Pre-drilled holes for accessory rescue winches or jobsite boxes
- Additional weights and taller mast can be added for jobsite flexibility

ANCHORAGE CONNECTORS

2100080

DOOR/WINDOW JAMB ANCHOR

Non-penetrating anchor is lightweight and portable, requiring no tools for attachment. Adjustable opening ranging from 21.5" to 51.5" (54.6 cm to 130.8 cm). Rated for 3,600 lbs. (16kN).



2100091 9-1/2 ft. mast for perimeter limiter





DBI-SALA® has created a proven process for developing unique solutions. Whether it's an existing or modified product, or an entirely new design, DBI-SALA® always meets the requirements of your specific application.

Each custom solution is driven by our customers' needs and is dependent on the industry, environment and specific design constraints, including government standards. Give DBI-SALA® a call today. We may already have an existing system that will meet your needs. If not, our experts will walk you through a simple 3-step process to assure you receive the right product for your application.



STEP 1: DESIGN

A custom access concept rendering is created, based upon your specific application.



STEP 2: ENGINEERING

Engineers structurally analyze and produce drawings to exact specifications for your approval.



STEP 3: FABRICATION

Expert welders and fabricators bring your project to life. And we deliver your custom access solution.

Contact DBI-SALA® today. We'll demonstrate just how effective it can be to partner with an organization that truly understands your need for safe and reliable custom access solutions.




CUSTOM ACCESS SOLUTIONS

FLEXIGUARD™ A-FRAME RAIL FAS

The FlexiGuard™ A-Frame Rail Fall Arrest System (FAS) provides a secure anchor point, in a portable structure, for increased worker mobility and protection. Depending on the configuration, this system has the capacity to provide fall protection for up to 4 workers and can be easily moved from jobsite to jobsite. It provides safe and reliable fall protection where you need it, when you need it.



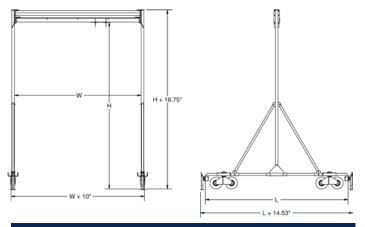

STANDARD SYSTEM DIMENSIONS

W	Maximum Width	up to 34 ft. (10.36 m)
Н	Maximum Height	up to 30 ft. (9.14 m)
L	Maximum Length	up to 19 ft. (5.8 m)
	Maximum Number Of Users	4

 $\label{lem:measurements} \textbf{Measurements above are for standard systems} \textbf{—} \textbf{custom systems also available}.$



DURABLE

- Powder coated T 6061 lightweight aircraft aluminum and steel
- Rigid gusseted support for extra tall and wide applications
- Wheels: Heavy-duty urethane or foam filled pneumatic (won't go flat)
- Rail: Maintenance free extruded aluminum rail for free gliding trolleys

PORTABLE

- Lightweight design—easily moved by two people
- Indoor and outdoor use
- Heavy-duty stabilization jacks
- Visual level indicators (vertical uprights)

FLEXIBLE


- Dual enclosed fall arrest rails allow for bypass of workers
- Fixed height or adjustable height systems available
- Capacity for up to 4 workers depending on configuration
- Wide user footprint with overhead rails 34' (10.36 m) wide
- High clearance for tall work surfaces, 30' (9.14 m) anchor height
- Mobile anchor point can be relocated

- Custom designs available to meet your specific requirements
- Specialized installation, supervision and training are available with every solution
- Call DBI-SALA® for custom product details

FLEXIGUARD™ BOXED-FRAME RAIL FAS

The FlexiGuard™ Boxed-Frame Rail Fall Arrest System (FAS) provides a convenient means of securing a rigid rail in areas with limited space or inadequate overhead structure. These frames can be custom built to accommodate a specific area or piece of equipment. Permanent mounted and portable systems are available depending on your application needs.





STANDARD SYSTEM DIMENSIONS

W	Maximum Width	up to 24 ft. (7.32 m)
Н	Maximum Height	up to 25 ft. (7.62 m)
L	Maximum Length	up to 60 ft. (18.29 m)
	Maximum Number Of Users	4

DURABLE

- Powder coated T 6061 lightweight aircraft aluminum and steel
- Rigid gusseted support for extra tall and wide applications
- Wheels: Heavy-duty urethane or foam filled pneumatic (won't go flat)
- Rail: Maintenance free extruded aluminum rail for free gliding trolleys

PORTABLE

- Lightweight design—easily moved by two people
- Ability to reposition with forklift or overhead crane
- Heavy-duty stabilization jacks
- Visual level indicators (vertical uprights)

VERSATILE


- Indoor and outdoor use
- Portable or fixed solutions available
- Multiple overhead anchor points
- Systems can be combined to cover larger work area
- Rail runs parallel to a load, giving a larger area of coverage
- Minimal fall clearance required with SRL and rigid rail design

- Custom designs available to meet your specifications
- Specialized installation, supervision, and training are available with every solution
- Call DBI-SALA® for custom product details

FLEXIGUARD™ C-FRAME RAIL FAS

The FlexiGuard™ C-Frame Rail Fall Arrest System (FAS) is a versatile solution for working at heights. It's designed to be moved manually or with use of a tow bar and service vehicle. The C-Frame Rail FAS will require some clearance under the equipment being accessed, to accommodate for outrigger supporting legs.



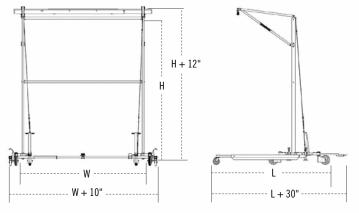

Typical Dimensions (Height x Length x Width)

- Standard rail widths of 10' (3.05 m), 15' (4.57 m), and 20' (6.10 m)
 Custom widths are also available
- Height adjustable options from 12' (3.66 m) to 18' (5.49 m), 16' (4.88 m) to 26' (7.93 m) and 20' (6.10 m) to 34' (10.36 m)
- \blacksquare Fixed Height anchorage options up to 28' (8.53 m) also available

STANDARD SYSTEM DIMENSIONS						
W	Maximum Width	up to 20 ft. (6.1 m)				
 Н	Maximum Height	up to 34 ft. (10.36 m)				
L	Maximum Length	up to 18 ft. (5.49 m)				
	Maximum Number Of Users	2				

Measurements above are for standard systems—custom systems also available.



- Powder coated T 6061 lightweight aircraft aluminum and steel
- Rigid gusseted support for extra tall and wide applications
- Wheels: Heavy-duty urethane or foam filled pneumatic (won't go flat)
- Rail: Maintenance free extruded aluminum rail for free gliding trolleys

PORTABLE

- Lightweight design—easily moved by two people
- Tow bar option allows for repositioning by forklift or other service vehicle
- Heavy-duty stabilization jacks
- Visual level indicators


VERSATILE


- Indoor and outdoor use
- Portable or fixed solutions available
- Adjustable or fixed height designs available
- Multiple overhead anchor points
- Rail runs parallel to a load, providing a large working area
- Numerous wheel options available for varying work surfaces
- Minimal fall clearance required with SRL and rigid rail design

- Custom designs available to meet your specifications
- Specialized installation, supervision and training are available with every solution
- Call DBI-SALA® for custom product details



The FlexiGuard™ Counterweight Rail Fall Arrest System (FAS) is designed to use a FlexiGuard™ or customer-specified counterweight to extend an anchor point over a work surface. As a result, the system can be positioned close to equipment or structure without obstructing access.

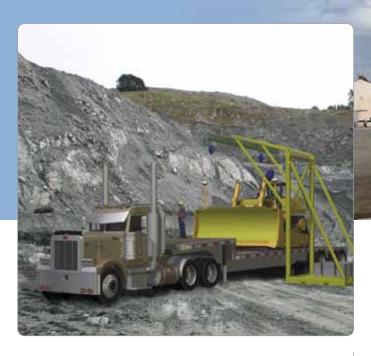



Typical Dimensions (Height x Length x Width)

- Unit base sizes dependent on length and width of rails. Bases can be as small as 6' (1.83 m) by 6' (1.83 m) to as large as 24' (7.32 m) by 8' (2.44 m).
- Custom trailer mounted systems can be as long as 52' (15.85 m).

STA	STANDARD SYSTEM DIMENSIONS						
W	Maximum Width	up to 52 ft. (15.85 m)					
Н	Maximum Height	up to 25 ft. (7.62 m)					
L	Maximum Length	up to 40 ft. (12.19 m)					
	Maximum Number Of Users	2					

Measurements above are for standard systems—custom systems also available.

DURABLE

- Powder coated T 6061 lightweight aircraft aluminum and steel
- Rigid gusseted support for extra tall and wide applications
- Wheels: Heavy-duty urethane or foam filled pneumatic (won't go flat)
- Rail: Maintenance free extruded aluminum rail for free gliding trolleys

PORTABLE

- Ability to reposition with forklift
- Trailer mounted designs for easy mobility

VERSATILE

- Indoor and outdoor use
- Portable or fixed solutions available
- Multiple overhead anchor points
- Leveling pads for uneven surfaces
- Rail runs parallel to a load, giving a larger area of coverage
- Does not require engineered piles or costly foundation installation
- Standard counterweights available
- Additional length can be added by joining multiple systems

- Customer specified counterweight options
- Custom designs available to meet your specifications
- Specialized installation, supervision and training are available with every solution
- Call DBI-SALA® for custom product details

FLEXIGUARD™ CUSTOM RAIL FAS

The FlexiGuard™ Custom Rail Fall Arrest System (FAS) is a rigid system that eliminates sag and deflection. It's an ideal solution for applications with minimal fall clearances and reduces the chance of multiple chain reaction falls sometimes associated with flexible cable horizontal lifeline systems. The Custom Rail FAS

provides a large working area for multiple operators, while minimizing costs.



NUMBER OF USERS / WORKING LOAD

Span	1 USER 1800 lbs (816 kg)	2 USERS 3,600 lbs (81,633 kg)	3 USERS 5,400 lbs (2,449 kg)	4 USERS
8 ft. 2.44 m				Call DBI-SALA®
16 ft. 4.88 m			1	for details
24 ft. 7.32 m	/		s must be capable times safety fact	



- Shock absorber and/or SRL required
- Safety Factor: 2:1 Minimum
- Consult the manufacturer for more details

DURABLE

- Maintenance free shielded rail design
- Weather resistant anodized extruded aluminum
- Built-in trolley glides effortlessly along rail for smooth operation

VERSATILE


- Junction box allows for directional change at any angle with multiple rails
- Unlimited length of continuous rail with sufficient support
- Can be mounted to wall, ceiling or various other overhead structures
- Trolleys can work with carabiners or snap hooks
- Rail can be mounted in any direction
- Rated for multiple users
- For outdoor or indoor use
- Minimal training required
- Rigid rail has no deflection or sag, reducing fall clearance requirements

- Custom designs available to meet your specifications
- Specialized installation, supervision and training are available with every solution
- Call DBI-SALA® for custom product details

FLEXIGUARD™ LADDER FAS

The FlexiGuard Ladder Fall Arrest System (FAS) combines easy access to elevated work areas, with 100% fall protection. Operators are protected from the ground up, for the duration of the work being performed. System configurations may include, but are not limited to, guardrails, SRLs, or confined space equipment.









Tanker system which requires supporting work surface for fall arrest loads

STANDARD SYSTEM DIMENSIONS

W	Maximum Width	up to 20 ft. (6.10 m)
Н	Maximum Height	up to 39 ft. (11.90 m)
L	Maximum Length	up to 18 ft. (5.49 m)
	Maximum Number Of Users	2

Measurements above are for standard systems—custom systems also available.

DURABLE

- Powder coated T 6061 lightweight aircraft aluminum and steel
- Foam protected non-slip platform
- Wheels: Heavy-duty urethane or foam filled pneumatic (won't go flat)
- 100% fall arrest rated tie-off from the ground up

PORTABLE

- Quick assembly and positioning allows for utilization across facility
- Towable design for easy mobility
- Lightweight design is easy to move by hand
- Heavy-duty stabilization jacks

VERSATILE

- Indoor and outdoor use
- Portable or fixed solutions available
- Multiple overhead anchor points based on design
- Collapsible design for storage or transportation
- Adjustable handrails
- Several standard height options available

- Various guardrail configurations available
- Custom designs available to meet your specifications
- Specialized installation, supervision and training are available with every solution
- Call DBI-SALA® for custom product details





When it comes to confined space entry/rescue, it is essential that equipment operates perfectly and quickly. DBI-SALA® has an extensive line of rescue and retrieval systems with decades of proven field service.

Safety engineers and site directors trust DBI-SALA® for the type of high quality, rugged systems that will ensure top performance when it is needed the most. Our systems meet applicable industry standards. We also customize solutions to suit customer needs. Call DBI-SALA® today.

WHAT TO LOOK FOR IN A CONFINED SPACE RESCUE SYSTEM:

EASE-OF-USE

Your systems must provide you with the ability to handle a crisis simply, flawlessly and immediately. During an emergency, time is of the essence.

MECHANICAL SYSTEMS

Lifeline type and length are just a few of the options your system may need. In some situations, a back-up system may be required.

DURABILITY

All system components must be made from quality materials strong enough to endure rough handling and exposure to the elements.

VERSATILITY

Your system should be adjustable and adaptable to extreme environments and uneven terrain.

A modular design is also helpful, allowing you to add to the system over time.

STRENGTH

Your system must be rated for your application, such as fall arrest, rescue, man-riding or material handling. Choose one that maximizes strength and minimizes weight.

PORTABILITY

Your system should be lightweight, easy to transport, set-up and store. Remember in an emergency situation, every second counts.





CONFINED SPACE RESCUE **BUILT-IN PULLEYS** Route lifelines of two mechanical devices for smooth, efficient VARIABLE OFFSET MAST = operation. Adjustable length of davit ensures ADVANCED DAVIT ARM lifelines are always centered over confined space. SYSTEM COMPONENTS **FALL ARREST ANCHORAGE** Up to a 5,000 lb. (22kN) rated anchor point for Variable offset davits are designed for use where multiple offset masts fall arrest device. are required. The variable offset masts may be equipped with front mounted and/or back mounted winches or SRLs and feature an anchor point rated up to 5,000 lbs. (22kN) depending on pin position. For applications with overhead clearance restrictions, the adjustable height of the variable offset masts can eliminate the need for custom length masts and mast extensions. Quick connect/release pins allow for fast and easy set-up, dismantle and transport. WINCH Davits can be equipped with both primary and secondary (back-up) mechanical devices for added flexibility. **ADJUSTABLE HEIGHT** Eliminates the need for custom length masts and extensions. QUICK-MOUNTING BRACKETS Simple detent style winch mounting brackets make installation fast and efficient. (See page 134 for options.) **LOWER MAST EXTENSIONS** 3-WAY SRL Allow the user to increase the overall Davits can be equipped with both primary anchorage height of the system. and secondary (back-up) mechanical devices for added flexibility. - BASE OPTIONS Several portable and fixed base options are available for complete versatility.



ADVANCED ONE-PIECE ADJUSTABLE OFFSET DAVIT MASTS

ADJUSTABLE OFFSET DAVIT MAST	66" to 76" (167.6 cm to 193 cm)	78" to 88" (198.1 cm to 223.5 cm)	90" to 100" (228.6 cm to 254 cm)	69.5" to 87.5" (176.5 cm to 222.2 cm)	81.5" to 91.5" (207 cm to 232.4 cm)	93.5" to 111.5" (237.5 cm to 282.2 cm)
11-1/2" to 27-1/2" (29.2 cm to 69.8 cm)	8518382	8518383	8518384			
23-1/2" to 42-1/2" (59.7 cm to 108 cm)				8518385	8518386	8518387

ADVANCED TWO OR THREE-PIECE ADJUSTABLE OFFSET DAVIT MASTS & LOWER MAST EXTENSIONS

Customize either one of these davit masts with up to (2) lower mast extensions. The extensions provide the flexibility to change the overall mast height of your system. Custom lengths are also available. Call for details.



8518001

11-1/2" TO 27-1/2" ADJUSTABLE OFFSET DAVIT MAST (INCLUDES WINCH MOUNT BRACKET)


Combine this one-piece davit mast with any two (2) lower mast extensions to increase the anchorage height.



8518006

23-1/2" TO 42-1/2" ADJUSTABLE OFFSET DAVIT MAST (INCLUDES WINCH MOUNT BRACKET)

Combine this one-piece davit mast with any two (2) lower mast extensions to increase the anchorage height.



8518509 21" (53.3 cm) Advanced lower mast extension

8518002 33" (83.8 cm) Advanced lower mast extension

8518003 45" (114.3 cm) Advanced lower mast extension

8518004 57" (144.8 cm) Advanced lower mast extension

ADVANCED BAGS AND ACCESSORIES



8518501

CARRYING BAG

Bag with protective plastic liner for advanced adjustable offset davit masts.

8513564 Bag with protective plastic liner for advanced adjustable offset davit mast, with lower mast extension.

119



ADVANCED HOIST SYSTEMS

The Advanced Series Hoist Systems are designed for manhole and confined space entry/retrieval applications. These units are constructed of lightweight materials including high-strength aluminum. The davit pivots for ease-of-rescue and has adjustment for overhead clearance restrictions. The lower base adjusts to fit most standard entries. Many other portable and fixed bases are available to suit any jobsite need. If additional height is required, check out our lower mast extensions. If you don't see what you need, please call for your customized solution.



8518000

ADVANCED 5-PIECE HOIST SYSTEM

Davit arm and base system includes 11-1/2" to 27-1/2" (29.2 cm to 69.8 cm) adjustable offset upper mast (8518001), 33" (83.8 cm) lightweight lower mast (8518002) and 3-piece lightweight base (8518005). Includes winch mounting bracket. Order winch and SRL separately.

Weight: 100 lbs. (45.5 kg)

ADVANCED BAGS AND ACCESSORIES




8518270

ADVANCED 5-PIECE **EQUIPMENT CART**


Transport the advanced 5-piece system with maximum ease over smooth or rough terrain. Ideal for tight storage situations.

8518513 Set of 2 carrying bags for 8518000 Advanced 5-Piece Hoist System

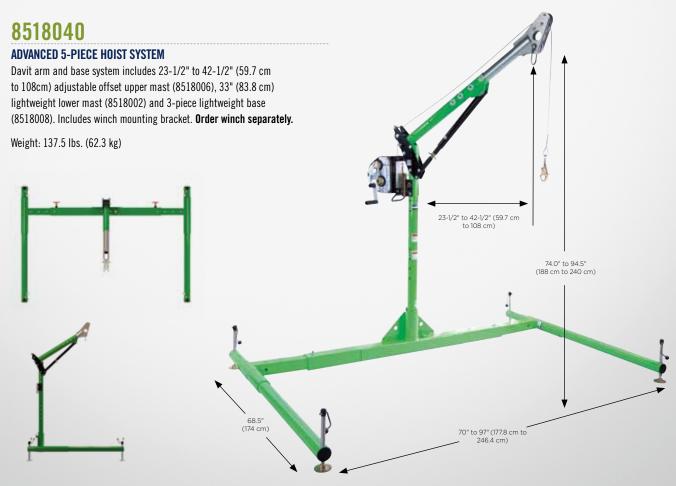

ADVANCED PORTABLE BASES

Advanced Portable Bases work with a variety of Advanced Davit Arm and Mast Extensions. Portable bases are ideal when you need to move and access various confined space areas. These bases are lightweight, easy to transport, set-up and use.

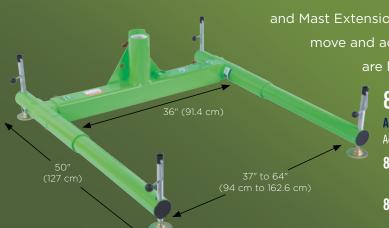

8518005

ADVANCED 3-PIECE PORTABLE BASE


Adjustable base for 27-1/2" (69.8 cm) maximum offset davit mast.

8518008 ADVANCED 3-PIECE PORTABLE BASE

Adjustable base for 42-1/2" (108 cm) maximum offset davit mast.

8513565 CARRYING BAG

Bag with protective plastic liner for 8518005 3-piece davit base.




8519377

EXTERNAL TANK COVER

Comes with Adjustable Sleeve Assembly (8511232). Used on manways with a flange structure that the unit may be secured onto. This collar can clamp onto 6" (15.2 cm) max thick flange.

Weight: 82 lbs. (37.2 kg)




8519378

INTERNAL TANK COVER

Comes with Adjustable Sleeve Assembly (8511232). Mounted to the inside of a manway. This collar may be used with sleeve assemblies and masts or for vertical entries.

Weight: 61 lbs. (27.7 kg)



8510568

FORKLIFT BASKET

Designed to convert your forklift into a versatile confined space and fall arrest work platform. Add a davit mast and winch/SRL to the basket and you're ready to go. Lightweight aluminum construction and tool-less assembly makes set-up, transport and storage convenient. Durable powder coated finish with anti-slip finish on walking surfaces. Includes spring-loaded gate.

Weight: 215 lbs. (98 kg)


8510323

BARREL MOUNT SLEEVE WITH 3.5" (89 MM) OPENING

Mild steel construction. Eight independent clamping screws allow temporary installations over edges of

installations over edges of shoring cans, walls and other structures. Comes with PVC inner liner. Custom fit openings available.

8510429 Barrel Mount Sleeve with 3" (76.2 mm)
Opening - Stainless Steel



8512285

ADJUSTABLE BARREL MOUNT SLEEVE


Designed for shoring, wall and parapet applications. Standard unit accommodates wall thicknesses up to a maximum of 24" (60.9cm), with shorter or longer adjustment tubes available on request. Anodized, welded aluminum with zinc plated steel hardware with inner sleeve.

8510715 Adjustable barrel mount sleeve for 0"-12" opening

ADVANCED MANHOLE COLLARS



8510501	17.5" (44.5 cm) Manhole Collar, fits 18"-20" (45.7 cm-50.8 cm) diameter. Provides a portable davit base by simply fitting within manhole opening. Powder coated aluminum construction with PVC sleeve liner.
8510520	19.5" (49.5 cm) Manhole Collar fits 20" - 22" (50.8 cm - 55.8 cm) diameter
8510457	21.5" (54.6 cm) Manhole Collar fits 22" - 24" (55.8 cm - 60.9 cm) diameter
8510163	23.5" (59.7 cm) Manhole Collar fits 24" - 26" (60.9 cm - 66 cm) diameter
8510633	25.5" (64.7 cm) Manhole Collar fits 26" - 28" (66 cm - 71.1 cm) diameter
8510632	27.5" (69.8 cm) Manhole Collar fits 28" - 30" (71.1 cm - 76.2 cm) diameter
8510546	29.5" (74.9 cm) Manhole Collar fits 30" - 32" (76.2 cm - 81.2 cm) diameter
8512994	33.5" (83.1 cm) Manhole Collar fits 34" - 36" (86.3 cm - 91.4 cm) diameter

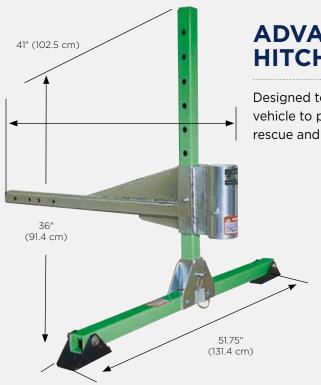

ADVANCED VEHICLE HITCH MOUNT SLEEVE

Designed to install into a 2" (51 mm) hitch receiver on an attendant vehicle to provide a portable anchor point for confined space entry, rescue and fall arrest systems.

8510140

VEHICLE HITCH MOUNT SLEEVE

Assembly for a maximum 27.5" (69.8 cm) offset davit mast.

8514461

VEHICLE HITCH MOUNT SLEEVE

Assembly for a maximum 42-1/2" (108 cm) offset davit mast.

ADVANCED VEHICLE HITCH SLEEVE EXTENSIONS

A maximum of one extension can be used with a hitch mount and a bumper attachment.



8514503	2' (0.61 m) Vehicle Hitch Mount Sleeve Extension	Weight: 17 lbs. (7.7 kg)
8512829	4' (1.21 m) Vehicle Hitch Mount Sleeve Extension	Weight: 27.8 lbs. (12.6 kg)
8511384	6' (1.83 m) Vehicle Hitch Mount Sleeve Extension	Weight: 39 lbs. (17.6 kg)

ADVANCED BUMPER ATTACHMENT OPTIONS

8511401

UNIVERSAL JOINT ASSEMBLY

Installs between the $8510140\,\mathrm{Hitch}$ Mount Sleeve or extension and the vehicle to compensate for uneven ground conditions.

Weight: 10 lbs. (4.5 kg)

8520886

UNIVERSAL HITCH BALL COUPLER

Designed to secure to a ball hitch on a vehicle (universal size).

Weight: 16 lbs. (7.6 kg)

ADVANCED COUNTERWEIGHT SYSTEMS

The Advanced Counterweight System is composed of a central base unit to accommodate a variety of anchoring options, positioning and adjustment legs, and extension assemblies. Anchoring options include a weight rack for counter balanced applications, and a wheel pad assembly to allow counter balance of the unit with an attendant vehicle.

NOTE: Individual weight plates sold separately.

8512894

ADVANCED COUNTERWEIGHT SYSTEM

 $\label{lem:counterweight} \mbox{Counterweight System Base with Pole Leg Assembly}.$

Weight: 199 lbs. (90.2 kg)





8514496

ADVANCED COUNTERWEIGHT SYSTEM

 $\label{lem:counterweight} \mbox{Counterweight System Base with Screw Leg Assembly}.$

Weight: 192 lbs. (87.1 kg)

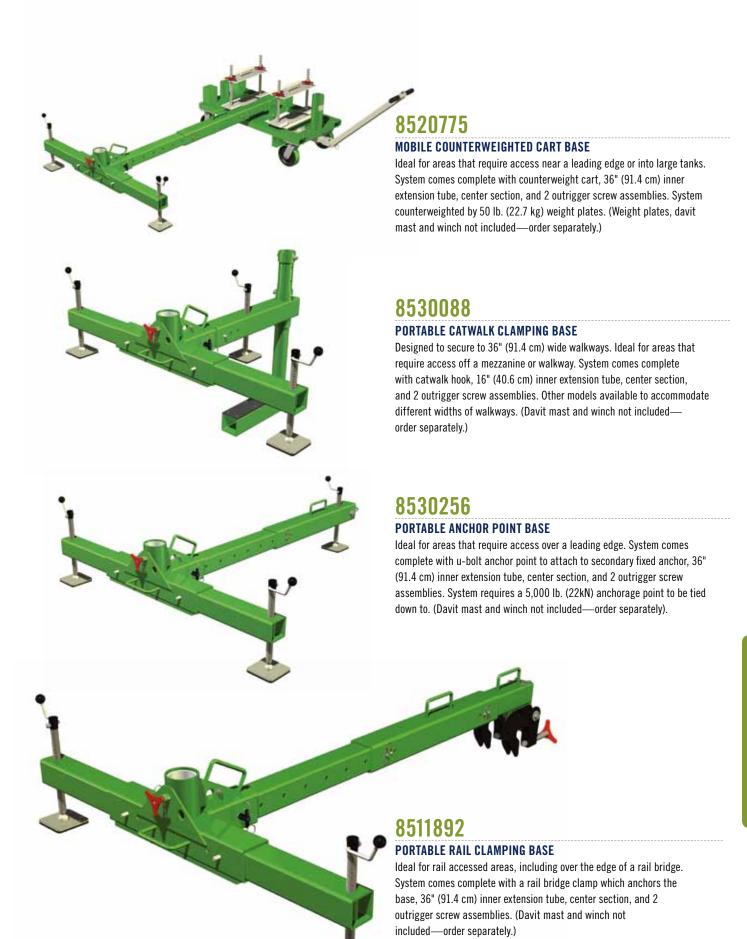

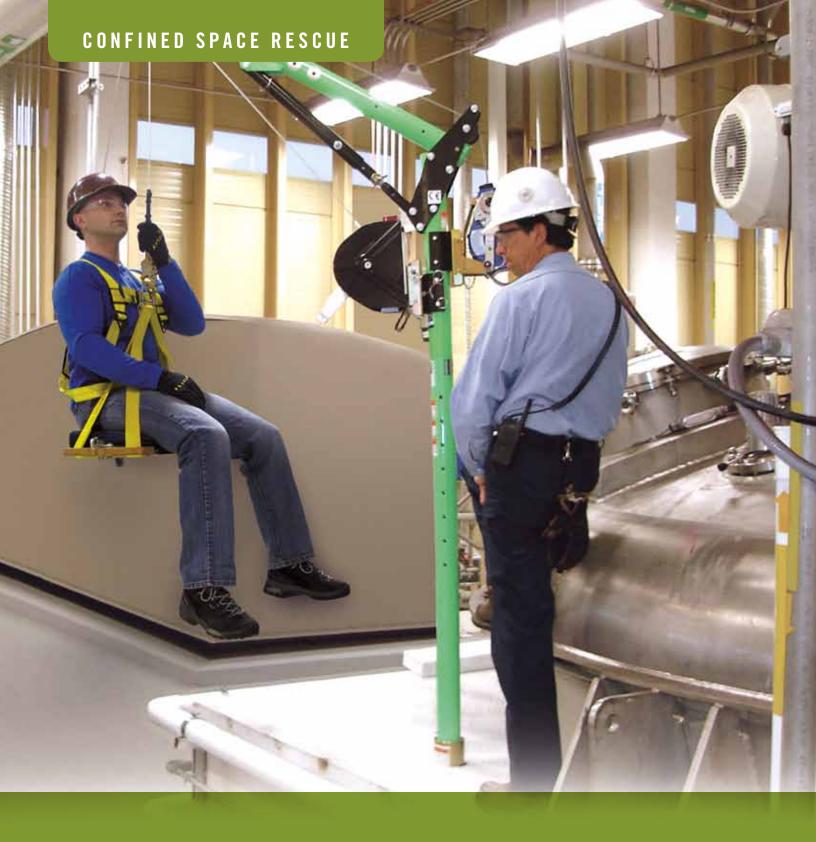

ADVANCED FIXED BASES

Advanced Fixed Bases work with a variety of Advanced Davit Arm and Mast Extensions. Fixed bases are ideal for work areas where frequent set-up and tear-down is required and a base can be permanently installed to an existing structure.




FLOOR MOUNT SLEEVE

Zinc plated mild steel construction. Mounts to horizontal concrete or steel structure. Comes with PVC sleeve liner.

Weight: 13 lbs. (5.9 kg)

8518347 Floor Mount Sleeve
Stainless steel construction



CORE MOUNT SLEEVE

Zinc plated mild steel construction. Designed for slip-in installation into 4" (10.1 cm) core hole in concrete or in an existing steel structure. Comes with PVC sleeve liner.

Weight: 8 lbs. (3.6 kg)

8510110 Core Mount Sleeve

Stainless steel construction




CENTER MOUNT SLEEVE

Zinc plated mild steel construction. Mounts to existing steel by welding or bolting. Comes with PVC sleeve liner.

Weight: 13 lbs. (5.9 kg)

8516563 Center Mount Sleeve

Stainless steel construction




DECK MOUNT SLEEVE

Zinc plated mild steel construction. Designed to slip into a 4" (10.1cm) hole in existing flooring. Flush mount design allows passage of traffic and eliminates trip hazards when not in use. Comes with PVC sleeve liner, plastic stopper and mounting hardware — mounts to thicknesses from 1/4" to 2" (6.4 mm-50.8 mm).

Weight: 17 lbs. (7.7 kg)

8515834 Deck Mount Sleeve

Stainless steel construction



8518348

WALL MOUNT SLEEVE 304 STAINLESS STEEL

304 stainless steel construction. Compact design creates minimum intrusion into work space. Mounts to vertical concrete or steel structures. Comes with PVC sleeve liner.

Weight: 12 lbs. (5.5 kg)

8516191 Wall Mount Sleeve

Zinc plated mild steel construction



8510316

FLOOR MOUNT SLEEVE

Mild steel construction. Recessed fastener pockets allow for bolt-in installation into existing concrete or steel structure. Flush mount design allows passage of traffic and eliminates trip hazards when not in use. Comes with PVC sleeve liner.

Weight: 21 lbs. (9.5 kg)

8512827 Flush Floor Mount Sleeve

Stainless steel construction



8510311

FLUSH FLOOR MOUNT SLEEVE

Mild steel construction. Comes with pins for fresh concrete and cast-in-place concrete anchors for new construction or renovation. Flush mount design allows passage of traffic and eliminates trip hazards when not in use. Comes with PVC sleeve liner.

Weight: 21 lbs. (9.5 kg)

8512828 Flush Floor Mount Sleeve Stainless steel construction



8510827

HEAVY DUTY SLEEVE CAP

Stainless steel construction, used with permanent mounted sleeves when installed in high traffic or other severe service locations.

Weight: 1.2 lbs. (0.54 kg)

8510826 Heavy Duty Sleeve Cap Zinc plated mild steel construction

CONFINED SPACE RESCUE

ADVANCED TRIPODS

Advanced Tripods are constructed of lightweight tubular aluminum with a rugged steel head assembly. The UCT series tripods can be combined with up to three pulleys to accommodate a variety of winches and fall arrest devices to meet a wide range of confined space entry/retrieval and rescue requirements. Quick release pins positively locate components at all adjustment points for tool-less set-up and adjustment.

TOP MOUNTED PULLEY SYSTEM

Mount up to three pulleys to route mechanical device lifelines for smooth operation.

SECONDARY ANCHOR POINT

5,000 lb. (22kN) anchor point for secondary fall arrest system on 7 ft. models—11,000 lb. (49kN) rating on 10 ft. models.

ALUMINUM CONSTRUCTION

Extremely lightweight yet durable construction for ease-of-use and longevity.

TELESCOPING LEGS

Provide fast adjustment and cannot disengage, for added worker satisfaction.

QUICK CONNECT BRACKET

Allows fast and easy attachment of mechanical devices.

- SAFETY CHAIN

Provides added support and strength for demanding confined space applications.

ADJUSTABLE HEIGHT LEGS

Fast and easy detent pin style adjustment allows for precise height setting.

INNER LEG LINERS

Allow for smooth positive connection and operation of leg adjustment.

8513159

ADVANCED UCT-1000 10' (3.05 m) TRIPOD

With adjustable locking legs, safety chains, top pulley and winch bracket.

Weight: 68 lbs. (30.8 kg)

MECHANICAL DEVICES

Can support up to 3 winches

or SRLs for complete flexibility.

Note: Winch not included—please order separately.

FOOT PADS -

Include sharp points for biting into soft ground and/or uneven terrain.



8513158

ADVANCED UCT-300 7' (2.13 m) TRIPOD

- Lightweight, durable aluminum construction with powder coat finish
- Includes guick connect winch mount bracket can accommodate up to three brackets
- Includes top mounted pulley system can accommodate up to three pulleys
- Telescoping adjustable locking legs for easy set-up
- Fast detent pin style adjustment and locking
- Inner plastic liners provide smooth adjustment
- Foot pads include sharp points for biting into soft ground and/or uneven terrain
- Safety chain for added support, strength and safety
- 5,000 lb. (22kN) built-in head-mounted anchor point

Winch and SRL not included—please order separately.



WINCH/SRL MOUNTING BRACKET **FOR 8513159 TRIPOD**

Attaches to the leg tube with quick-release pins for tool-less set-up and adjustment.

Weight: 5.2 lbs. (2.4 kg)



8510224

WINCH/SRL MOUNTING BRACKET **FOR 8513158 TRIPOD**

Attaches to the leg tube with quick-release pins for tool-less set-up and adjustment.

Weight: 3 lbs. (1.4 kg)

NOTE: Also see accessories on page 134 for additional bracket options.



8000000

ADVANCED 7' (2.13 m) ALUMINUM TRIPOD

- Lightweight, durable aluminum construction
- Includes quick connect winch mount bracket
- Includes top mounted pulley system
- Telescoping adjustable locking legs for easy set-up
- Fast detent pin style adjustment and locking
- Rubber safety shoes with spiked edges for different terrains
- Safety chain for added support, strength and safety
- 5,000 lb. (22kN) built-in head-mounted anchor points

Winch not included—please order separately.

8000010 9 FT. (2.7 M) ALUMINUM TRIPOD

With adjustable locking legs, safety chains, top pulley and winch bracket.

Winch not included - please order separately.

ADVANCED ACCESSORIES



8513329 Carrying bag for 7' (2.1 m) 8513158 tripod with protective plastic liner

8513330 Carrying bag for 10' (3 m) 8513159 tripod with protective plastic liner

9503094 Carrying bag for 7' (2.1 m) 8000000 tripod

9503095 Carrying bag for 9' (2.7 m) 8000010 tripod



8512293

TOP PULLEY ASSEMBLY FOR **UCT SERIES TRIPODS**

Pulleys are mounted on top of the head assembly to route mechanical device's lifeline over and into confined space area.

Weight: 1.6 lbs. (.73 kg)

CANTILEVER RESCUE SYSTEM

The Cantilever Rescue System Kit quickly and easily converts the 8513159 10 ft. (3.05 m) tripod into a versatile piece of equipment for high-angle rescue operations over roof edges, parapets, guard rails, cliffs, bridges or other situations. Using the rigid wheel pad supplied with the kit, the cantilever system may be anchored with a service vehicle's weight, weight rack or with a single anchor point.



ALUMINUM CONSTRUCTION

Extremely lightweight yet durable construction for ease-of-use and longevity.

QUICK MOUNT BRACKET

Allows fast and easy attachment of mechanical devices.

ADJUSTABLE HEIGHT LEGS

Fast and easy detent pin style adjustment allows for precise height setting.

TELESCOPING LEGS

Provide fast adjustment and cannot disengage, for added worker satisfaction.

LEG SUPPORT SYSTEM

Provides tripod leg support to use in cantilever rescue configuration.

- WHEEL PAD

Provides easy means to anchor system with service vehicles weight or weight rack kit.

8530257

CANTILEVER RESCUE SYSTEM

Complete with 8513159 10 ft. (3.05 m) tripod, 8515620 rigid wheel pad and attachment hardware, 8515631 weight rack kit, 8514540 leg support system and 8515150 top mount pulley. Winch not included, must order separately.




8515150

TOP MOUNT PULLEY FOR CANTILEVER SYSTEM

Allows system to handle two mechanical devices (winch and SRL).

Weight: 3.4 lbs. (1.5 kg)



8515631

CANTILEVER WEIGHT RACK KIT

Use the weight rack in conjunction with the 8512297 cantilever rescue system if there is not sufficient space for the attendant vehicle. Fifty pound weight plates sold separately.

Weight: 36 lbs. (16.3 kg)

ADVANCED BASIC HOIST


The Advanced Basic Hoist is the most efficient and economical confined space entry/retrieval alternative to a tripod. This lightweight aluminum structure assembles and adjusts without tools. The Advanced Basic Hoist features a collapsible base to reduce storage and transport space. A standard tie-off point provides a convenient 5,000 lb. (22kN) anchor point for fall arrest devices where required. All hardware is zinc plated for corrosion resistance.

NOTE: First-time setup requires some tools and assembly.

88" to 91"

(223.5 cm - 231.2 cm)





6" Min to 20" Max Width

POLE HOIST SYSTEM

The Advanced Pole Hoist attaches with a carabiner on the universal bracket to a suitable anchor point, allowing you to work in any direction from any angle. It has a unique swivel head that rotates 360 degrees, providing flexibility in both vertical and horizontal confined space entries. Two systems that adjust from either 4 ft. to 7 ft. (1.2 m - 2.1 m) or 6 ft. to 10 ft. (1.8 m - 3 m) are available for jobsite flexibility and to better position the attendant in close working quarters. Custom lengths are also available. Please call for details.



Note: Winch not included-please order separately.

8530252

EXTENDABLE POLE HOIST - 4-7 FT. (1.2-2.1 m)

Extension with swivel head and winch mounting bracket, T-bar leg assembly and hardware/fasteners.

Weight: 12 lbs. (5.4 kg)

8530253

EXTENDABLE POLE HOIST - 6-10 FT. (1.8-3 m)

Extension with swivel head and winch mounting bracket, T-bar leg assembly and hardware/fasteners.

Weight: 14 lbs. (6.4 kg)

POLE HOIST ACCESSORIES



8520777


CLAMP-ON ANCHOR FOR POLE HOIST

Designed to secure to a vertical or horizontal flange up to 6" (15.2 cm) thick and provide an anchorage point to connect a pole hoist device to.

8513329 Carrying Bag for 4 ft.-7 ft. Pole Hoist

8513330 Carrying Bag for 6 ft.-10 ft. Pole Hoist


TANK POD SYSTEM



8513700

The Tank Pod is designed to mount to tank manways with existing hardware for securing hatch covers. It mounts to manway flanges on bolt circle diameters from 19" to 36" (48.2 cm - 91.4 cm), with studs from 1/2" to 3/4" (1.2 cm - 1.9 cm) national coarse type. Three independently adjustable legs accommodate flange inclinations to a maximum of 45 degrees. The unit can be set up in an overhead clearance of only 25" (63.5 cm). It can be fitted with a variety of winches, ladder systems and fall arrest devices to meet application requirements.

Note: Winch not included—please order separately.

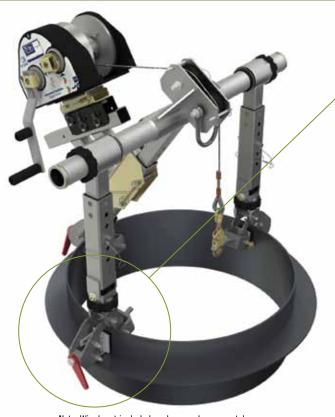

Note: Winch not included—please order separately.

TANK POD MOUNTING OPTIONS

8525274

TANK POD CLAMP-ON ADAPTERS

Set of 3 clamp-on adapters designed to secure to a vertical flange of a vessel and provide a means of attaching the tank pod 8513700 without welding or bolting. Stainless steel construction, accommodates tank flange thickness of up to 1.25". Requires at least a 3" tall flange for proper connection.

8515299 Mounting Stud Extension Adaptor (3-pack) 1/2" NC - 5/8" NC (12.7 mm - 15.8 mm)

8515300 Mounting Stud Extension Adaptor (3-pack) 5/8" NC - 5/8" NC (15.8 mm - 15.8 mm)

8515301 Mounting Stud Extension Adaptor (3-pack) 3/4" NC (19 mm - 15.8 mm)

8515981 Stainless Steel Multiple Angle 3/4" (19 mm) Weld-On Studs (3-pack)

TANK POD ACCESSORIES

8515982 Wheel Cart for Tank Pod

8516012 Tank Pod Mast Extension (12.7 mm - 15.8 mm)










8516012

8515981

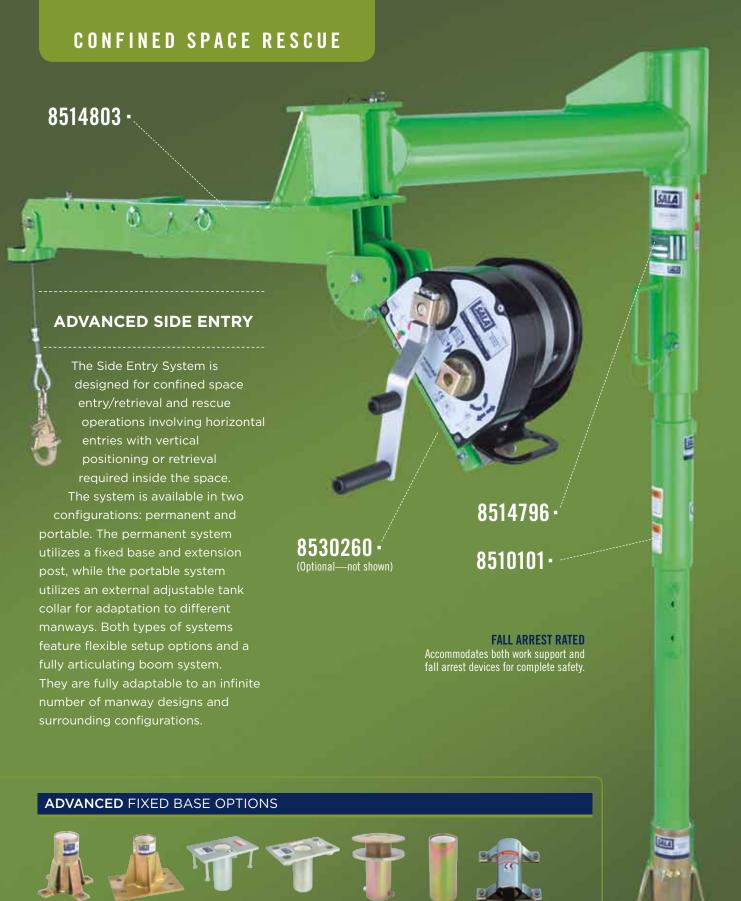

The Advanced Side Entry System for Permanent Mount applications can be used with a variety of fixed bases. Please see page 120-121 for more information.

Note: Shown with winch and fixed base these items must be ordered separately.

8514803

ARM ASSEMBLY

Side Entry System for permanent mount applications. System includes arm assembly and winch mount bracket. Order winch and fixed base separately. (shown)

Weight: 44 lbs. (19.9 kg)

8514796

SUPPORT POST

 $38\mbox{"}$ to $53.5\mbox{"}$ (96.5 cm - 135.9 cm). (shown)

Weight: 35 lbs. (15.8 kg)

MAST EXTENSION OPTIONS

8510100 15" (38.1 cm) Mast Extension **Weight:** 16 lbs. (7.2 kg)

8510101 24" (61.0cm) Mast Extension (shown) **Weight:** 19 lbs. (8.6 kg)

Weight: 13 mg. (o.0 kg)

8510102 36" (91.4 cm) Mast Extension **Weight:** 23 lbs. (10.4 kg)

8510103 48" (121.9 cm) Mast Extension

Weight: 27 lbs. (12.2 kg)



SECONDARY WINCH MOUNT BRACKET

Allows you to mount your digital winch underneath, opening up the top winch mount location for a 3-way SRL. Includes 8511832 winch mount bracket, 8510207 winch/SRL adaptor and fastener hardware.



ADVANCED PORTABLE FALL ARREST POST

The Advanced Portable Fall Arrest Post provides protection and complete mobility for three workers on top of transformers or other types of vertical platforms with potential fall hazards. Its compact and lightweight design of only 38 lbs. (17.2 kg) makes the post very easy to transport and put in place. The system features a telescopic design and 3 swiveling anchor points providing up to 3 workers with 360 degrees of protection and mobility. Portable and fixed bases provide complete jobsite versatility.

8516691

ADVANCED PORTABLE FALL ARREST POST

- 3 independent swiveling tie-off points
- 360 degrees of protection for 3 workers
- Telescopic design; 32.75" (83.2 cm) to 46" (116.8 cm) to 57.25" (145.4 cm)
- Lightweight and durable aluminum construction
- Leveling screws plumb system on inclines up to 15 degrees
- Built-in anchor ring for horizontal lifeline attachment
- Portable and fixed bases provide complete jobsite versatility

Weight: 38 lbs. (17.5 kg)





Telescoping design: Overall height can be adjusted from 32.75" (83.2 cm) to 57.25" (145.4 cm)

8516996

14 FT. (4.2 m) Uni-anchor fall Arrest post

The 14 ft. Uni-Anchor Fall Arrest Post mounts using Uni-Anchor plates and extends up to 14 ft. (4.2 m) to provide a 1-man-rated fall-arrest anchor point.

Weight: 71 lbs. (32.3 kg)

8516692

14" (356 mm) ANCHOR POST EXTENSION

Provides option to tie-off one worker at an increased height of 68.5" (174 cm).

Weight: 5 lbs. (2.2 kg)

ACCESSORIES



HLL 57.25" (145.4 cm)

8517565

CARRYING BAG

Heavy duty carrying bag for Portable Fall Arrest Post.

ADVANCED PORTABLE FALL ARREST POST RESCUE DAVIT ARM

8516693

RESCUE DAVIT ARM FOR ADVANCED PORTABLE FALL ARREST POST

The optional Rescue Davit Arm assembles easily to the Portable Fall Arrest Post, providing simple and efficient rescue and material handling capabilities. It's made with lightweight aluminum materials for easy transportation and setup.

Weight: 20.5 lbs. (9.3 kg)

NOTE: 8516691 post not includedplease order separately.





ANCHOR BASES FOR PORTABLE FALL ARREST POST



8517412

BARE STEEL UNI-ANCHOR WITH TIE-OFF ANCHORS

For use in closed environments without chemical or moisture exposure.

Weight: 11.6 lbs. (5.3 kg)



8510816

WELD-ON MOUNTING PLATE Unplated mild steel construction.

Weight: 11.6 lbs. (5.3 kg)



8517413

INCLINE ADAPTOR PLATE WITH TIE-OFF ANCHOR

Permanently weld to inclined surface.

Weight: 24 lbs. (10.9 kg)



8516997

UNI-ANCHOR I-BEAM BASE

Portable anchor clamps to I-beams.

Weight: 56 lbs. (25.5 kg)





SALALIFT™ II WINCHES

- Man rated 350 lb. (159 kg) capacity
- Overload clutch
- Gear ratio of 6:1
- Free-wheel mode
- Shielded ball bearings
- Lengths from 60 ft. to 120 ft. (18 m-36.5 m) available
- Cable and rope lifelines with swiveling snap hook and impact indicator
- Carrying handle for easy transport
- Corrosion resistant construction
- Quick-mount bracket and carrying bag



WINCHES

DRIVE TYPE	LIFELINE TYPE	MOUNTING BRACKET	WINCH BAG	ADVANCED DIGITAL WINCH	SALALIFT" II WINCH	50 ft. (15.2 m)	60 ft. (18 m)	90 ft. (27 m)	120 ft. (36.5 m)	140 ft. (42 m)	190 ft. (58 m)	240 ft. (73 m)	290 ft. (88 m)
	GALVANIZED STEEL			-			8518567	8518568		8518588	8518589	8518610	8518611
POWER DRIVE	STAINLESS STEEL			-			8518565	8518566		8518586	8518587	8518608	8518609
	TECHNORA ROPE			-			8518571				 	 	
	GALVANIZED STEEL			-			8518560	8518561		8518581	8518582	8518603	8518604
		-	-		-		8102001	8102009	8102005				
REMOVABLE	STAINLESS STEEL -			-			8518558	8518559		8518579	8518580	8518601	8518602
HANDLE		-	-		-		8102003	8102011	8102007				
				-			8518564					*	†
	TECHNORA ROPE	•	•		-	8102050						+	†
		CAI	BLE MC	DEL W	EIGHT	_	30.5 lbs. (13.8 kg)	32.5 lbs. (14.7 kg)	38.5 lbs. (17.5 kg)	40 lbs. (18.4 kg)	43 lbs. (19.5 kg)	50 lbs. (22.6 kg)	53.5 lbs. (19.5 kg)
				HNORA DEL W		27 lbs (12.2 kg)	27 lbs (12.2 kg)						

Note: Advanced Digital Winch includes a mounting bracket. The Salalift™ II Winch includes a mounting bracket and carrying bag.





3-WAY SELF RETRACTING LIFELINES

	WORKING LENGTH						
CABLE TYPE	30 ft. (9.1 m)	50 ft. (15.2 m)	85 ft. (25.9 m)	130 ft. (39.6 m)			
GALVANIZED STEEL	3400853	3400923	3400311	3400509			
STAINLESS STEEL	3400857	3400924	3400309	3400508			
WEIGHT	25 lbs. (11.3 kg)	34 lbs. (15.4 kg)	59.4 lbs. (27 kg)	82.8 lbs. (37.5 kg)			

Note: All of the 3-way SRLs above also include a mounting bracket and carrying bag.

WINCH BRACKETS AND ACCESSORIES



8518506

ADJUSTABLE LADDER BRACKET

Designed to allow use of the ladder section(s) 8518507 with various base, sleeve and mast options. Installs over mast/extension.



8516491

30 DEGREE INCLINE WINCH/SRL ADAPTER BRACKET

To attach winch/SRL to 11-1/2" - 27-1/2" offset upper mast.

8516480 40 Degree Incline Winch/SRL Adapter Bracket To attach winch/SRL to 23-1/2" - 42-1/2" inch offset upper mast.



8516824

QUICK RELEASE MOUNTING BRACKET

For Advanced Upper and Lower Masts.



8510207

WINCH/SRL ADAPTER WITH FLAT BACK

To attach DBI-SALA® winch/SRL to structures.

8518507

8 FT LADDER SECTION

Complete with connector channels and positive pin locks. Can be connected to additional ladders (up to 5 sections) for a maximum length of 32 ft. (9.75 m).

8518508 4 ft. ladder section



8517567

PADDED CARRYING BAG

For digital winch.



8512936

OVERLOAD PROTECTION CLUTCH

Features a maximum working load of 450 lbs.

8512935 Overload Protection Clutch

Features a maximum working load of 250 lbs.



1001210

RETRIEVAL WRISTLETS

Rescue/retrieval design is ideal for connection to victims wrists for narrow extractions. Yoke wristlets attached to Y-lanyard with D-ring at end x 2 ft (0.6 m).



1231460

Rescue/retrieval design ideal for use with harness incorporating shoulder D-rings. Spreader bar with snap hooks at ends, D-ring at center x 2 ft. (0.6 m).

1231470 Y-Lanyard without spreader bar x 2 ft. (0.6 m)

CUSTOM SOLUTIONS

Unique situations call for special solutions. DBI-SALA® designed and built the systems below, for use in one-of-a-kind applications. If you do not find a solution within this catalog, contact us today and we'll work together to solve the challenge. We never compromise on rescue—neither should you.

CUSTOM SOLUTION EXAMPLES



STRAP MOUNTED DAVIT BASE

Custom base with tie-down straps provides anchorage point for davit system on raised manways and smaller storage tanks.

I-BEAM MOUNTED DAVIT BASE AND ARM

Custom base attaches to I-beams, providing an anchorage point for a basic davit arm.



BOLT-ON SIDE ENTRY SYSTEM

Custom designed to bolt onto a flanged side entry manway to provide an anchorage for a winch or 3-way SRL.



BOLT-ON DAVIT BASE

Custom designed to bolt onto a flanged manway to provide an anchorage for a davit arm system.



CONCRETE PARAPET CLAMP DAVIT BASE

Custom designed to attach to a concrete edge to provide an anchorage for a davit system.

CALL DBI-SALA® TODAY TO GET
STARTED ON YOUR CUSTOM SOLUTION
PERFORMANCE-DESIGNED FOR
CRITICAL EMERGENCY SITUATIONS.



When things get real hairy, real fast, you can rely on DBI-SALA®. That's because we have the most complete line of safe and effective rescue and retrieval gear in the industry. Our Rollgliss™ systems meet applicable industry standards.

Safety engineers and site directors trust us for our rugged, quality systems that operate fast and flawlessly. Often, a DBI-SALA® system has made the difference between life and death. Remember, during an emergency when quick escape or rescue is vital, every second counts.

CHOOSING RESCUE AND DESCENT SYSTEMS

The type of jobsite, anchor location, working load and limit, and ease of use are some important considerations when choosing the appropriate rescue and descent system. A single rescue system cannot efficiently handle every scenario, performing well for one application but not another. Some rescue systems are easy to use for one application, while others require more skill but can be adapted for use in multiple situations. Please refer to the chart below and the following pages to assist you in choosing the proper system.

Rescue and Descent Scenario	Rollgliss™ Rescumatic™	Rollgliss™ Descender	Rollgliss™ RPD	Rollgliss™ R250	Rollgliss™ R350	Rollgliss™ R500	Rollgliss™ Self Rescue	Rollgliss™ Fisk Descender™
Evacuation/Emergency Escape	•	-	•	N/A		•	-	•
Automatic Controlled Descent	•	•	N/A	N/A	N/A	•	N/A	N/A
Work Positioning	N/A	N/A	•	N/A	•	N/A	N/A	•
User Controlled Ascent (Self Rescue)	N/A	N/A	•	N/A	•	N/A	N/A	N/A
User Controlled Descent (Self Rescue)	•	•	•	N/A	•	•	•	•
Co-Worker Controlled Ascent (Assisted Rescue)	N/A	N/A	•	•	•	•	N/A	N/A
Co-Worker Controlled Descent (Assisted Rescue)	•	•		•	•	•	N/A	
Can Be Used Over a Leading Edge	N/A	N/A	N/A	N/A	N/A	•	N/A	N/A
Capable of Doing Pick-Offs	N/A	N/A	•	N/A	•	•	N/A	N/A
Rescue Retrieval Pole Capable	N/A	N/A	_	•	_	_	N/A	N/A
Maximum Height of Operation (Feet)	1000	200	450 (3:1)	99	330 (3:1)	1083	55	Unlimited
Lifeline Needed per ft. of Rescue Height	1	1	3-4	1	2-5	1	1	1
Maximum Number of Users (Emergency Use	1	1	2	1	2	2	1	1

- Minimal training, primary use of device
- Moderate training, secondary use of device
- Requires additional training

N/A Not applicable

Some Models Equipped with





=rollgliss =

R500 RESCUE AND DESCENT DEVICE

The Rollgliss™ R500 offers the choice of controlled descent rescue.

evacuation or the versatility of assisted rescue with lifting capabilities. This fully automatic

controlled descent feature, at 2-3 ft. per/second (0.6-0.9 m), sets new standards of performance and safety. Ideal for rescue and evacuation from heights

one user 310 lb. (140 kg) or 330 ft. (100 m) for two users totaling 550 lbs. (248 kg). Unique bidirectional design allows one end of the lifeline to descend while the other ascends, ready





Protects the rescue line from contact with sharp edges and helps to reduce friction.



Used to anchor the device with either a carabiner or sling.

LIFTING HANDLE

Provides added leverage during assisted rescue, and stows away for storage.

RESCUE HUB

Used during assisted rescue to slightly raise the fallen worker to disengage primary fall protection system, so descender can lower the victim to the ground. (Optional)

ALUMINUM HOUSING

Reduces overall weight and helps to dissipate heat during descent for better performance.

LADDER BRACKET

Quickly and easily attaches device to the rungs of a fixed ladder. (Optional)

PIGTAIL

Provides added control during one or two user rescue operations.



Model Shown

3320100

Used in conjunction with the Pigtail to lock-off the device and stop or hold the victim during rescue.

LIFELINE HOOK

Patented self locking snap hook is industry preferred and compatible with our First-Man-Up™ System for remote rescue capabilities.







Rescue Hub	Ladder Bracket	Humidity Case	100 ft. (30 m)	200 ft. (61 m)	300 ft. (91 m)	400 ft. (122 m)	500 ft. (152 m)
•	•	٠	3324100	3324200	3324300	3324400	
•	•		3320100	3320200	3320300	3320400	3320500
•		•	3323100	3323200	3323300	3323400	
•			3321100	3321200	3321300	3321400	3321500
			3322100	3322200	3322300	3322400	3322500

- All Models above also include the following: 3 ea. Anchor Slings, 3 ea. Carabiners, 1 ea. Pulley, 1 ea. Edge Protector, 1 ea. Rope Grab, 1 ea. Carrying Bag
 Other lengths available in 25 ft. (7.5 m) increments.
- If you already own a Rollgliss™ R500 and want to add a Ladder Bracket, order 3322002.











HUMIDITY RESISTANT CASE

Fully sealed case provides 10 year minimum storage life, substantially reducing inspection and maintenance costs. Fits up to a 400 ft. (152.5 m) system. External humidity indicator allows user to inspect the seal without opening case. (Optional)

■ If you already own a Rollgliss™ R500 and want to add a Humidity Case, order 9505615.

=rollgliss =

R350 RESCUE SYSTEMS

The Rollgliss™ R350 system provides efficient hauling, but more importantly, very controlled lowering (a finger and thumb are all that is required to hold a load). This system also allows you to change the hauling ratios on the fly with quick release pulleys, allowing custom rigging for different applications and jobsites.

- Interchangeable pulley system with a 3:1 ratio standard (optional ratios of 2:1 to 5:1 available)
- Includes everything you'll need for efficient rescue
- Rope retention bar does not allow rope to twist or overlap
- Visual and audible function controls
- Static kernmantle rope for optimum performance
- Quick connect system allows fast insertion of various pulleys



ROLLGLISS™ R350 RESCUE AND DESCENT

8902004 Rollgliss™ R350 Rescue System, 50 ft. travel / 200 ft. of 3/8" rope (15.25 m / 61 m), 3:1 ratio with pulleys, rope control device, anchor strap, carabiner and carrying bag.

8902006 Rollgliss™ R350 Rescue System, 100 ft. travel / 400 ft. of 3/8" rope (30.5 m / 122 m), 3:1 ratio with pulleys, rope control device, anchor strap, carabiner and carrying bag.

NOTE: Other lengths available in 10 ft. (3 m) increments. Accessories including 2:1, 4:1 and 5:1 pulleys are also available.

ROLLGLISS™ RPD RESCUE POSITIONING SYSTEM

This system provides a safe, simple rescue system with features for raising, lowering and positioning during normal work activities. The RPD unit includes a speed sensing lock for added safety and allows you to manually lock off the device once you reach a work level. It's ideal for servicing buildings, bridges and dams, as well as within confined spaces. It may be operated by the user or a second standby worker.

- Pre-rigged for quick and easy installation and use
- No special tools, power source or extensive skills needed
- Built-in brake stops a fall should user lose control
- Lock-out mechanism allows user to stop/start anywhere
- 3:1 or 4:1 lifting ratio configurations available
- Durable, corrosion resistant construction

3600050 Rollgliss[™] Rescue Positioning Device, 50 ft. travel / 210 ft. of 3/8" rope (15.25 m / 64 m), 3:1 ratio with pulleys, rope anchor straps, two carabiners and carrying bag.

3600100 Rollgliss™ Rescue Positioning Device, 100 ft. travel / 410 ft. of 3/8" rope (30.5 m / 125 m), 3:1 ratio with pulleys, rope anchor straps, two carabiners and carrying bag.

3602050 Rollgliss™ Rescue Positioning Device, 50 ft. travel / 260 ft. of 3/8" rope (15.25 m / 79.3 m), 4:1 ratio with pulleys, rope anchor straps, two carabiners and carrying bag.

3602100 Rollgliss[™] Rescue Positioning Device, 100 ft. travel / 510 ft. of 3/8" rope (30.5 m / 155.5 m), 4:1 ratio with pulleys, rope anchor straps, two carabiners and carrying bag.





DESCENDER

The Rollgliss® Descent Device will get personnel down safely from high places when quick escape is vital. Either vertical or sloped descent models are available to provide complete

versatility and flexibility for any job site or work environment.

- Simple design for easy installation and use
- No power source or special skills or tools required
- Simply connect to harness and step off structure for evacuation
- Use repeatedly without factory servicing after user inspection
- Corrosion resistant construction for maximum durability
- Wire rope lifeline for added durability in extreme environments



DESCENT TYPE	LIFELINE MATERIAL	AUTOMATIC OR MANUAL RETRACTION	LOW OR HIGH SPEED	115 ft. (35 m)	200 ft. (61 m)
	GALV	Auto	Low	3303000	
VERTICAL	UALV	Manual	Low		3303017
VERT	SS	Auto	Low	3303002	
		Manual	Low		3303018
	GALV	Auto	Low	3303001	
		Manual	High		3303015
SLOPED		Auto	Low		3303003
IS	SS	Manual	Low		3303019
		IVIAIIUAI	High		3303016

NOTE: Sloped low speed models also include linkage, guide cable sleeve and suspension bars. Sloped high speed models include linkage, braking trolley and suspension bars.

ROLLGLISS™ RESCUMATIC™ AUTOMATIC DESCENT CONTROLLER

Provides safe, automatic controlled descent from overhead cranes, towers, buildings or other heights. The system safely lowers the endangered worker, or workers, at a controlled rate of 3 ft. (0.9 m) per second.



- Pre-rigged for quick and easy installs and use
- No power source or special skills or tools required
- Simply don body support and step off structure for evacuation
- Bidirectional design, one end of lifeline descends while other ascends
- Galvanized wire core polyester rope for added strength

3300050	50 ft. (15.2 m) Rollgliss™ Rescumatic™ system with body support, anchoring carabiner, rope spool and bag
3300100	100 ft. (30.5 m) Rollgliss [™] Rescumatic [™] system with body support, anchoring carabiner, rope spool and bag
3300150	150 ft. (45.7 m) Rollgliss™ Rescumatic™ system with body support, anchoring carabiner, rope spool and bag
3300200	200 ft. (61 m) Rollgliss™ Rescumatic™ system with body support, anchoring carabiner, rope spool and bag

Other lengths available—please call for details.

RESCUE AND DESCENT



3304001

ROLLGLISS™ SELF RESCUE DEVICE

Ideal for use in bucket trucks, you simply connect the system to an anchorage point

capable of supporting 1,500 lbs. and you're ready to go. Then don the body support and simply throw the small bag with the lifeline webbing over the edge and begin your descent. As you adjust the hand-lever up or down, you can control the speed of your descent. An added bonus is that the system can be used by two workers in an assisted descent situation.

- Compact, simple and reusable design
- Installs in seconds
- Hand-lever provides complete control of descent rate
- Permanently attached support slings
- Non-conductive/corrosive construction



ROLLGLISS™ FISK DESCENDER™

The Rollgliss™ Fisk Descender™ is a simple, effective descent control system designed for durability, thermal capacity and smooth flow. During descent, the operators can tie off the system and position themselves at a specific work level. It is also very reliable, requiring minimal maintenance and can be used in a variety of applications, including window washing, tower and turbine work.

- Gentle flow for 19" (48.3 cm) of lifeline to pass through the descender
- Large radius for smoother descent and less wear to lifeline
- Reduction in rope hockling and torsional twist
- Durable 304 stainless steel construction



= rollgliss =

3604100

ROLLGLISS™ SRL RESCUE DEVICE

This system is designed to rescue a worker who has fallen while using a cable self retracting lifeline. Utilizing either the chain or cable grab that comes with the system, it can be anchored to a separate structure, around the SRL housing or in-line with the SRL cable. Once anchored, it takes seconds to complete the installation and begin the rescue procedure.

- Simplistic design makes rescue of fallen personnel fast and efficient
- System can be installed and ready for use in under a minute for added safety
- Fits SRL cable sizes from 5/32" (4 mm) to 5/16" (8 mm)
- Lifting ratio of 6:1 victim raised about 5" (12 cm) per stroke for rapid rescue
- 420 lbs. (190 kg), single user capacity for jobsite flexibility





=rollgliss"=

8900292

ROLLGLISS™ R250 RESCUE KIT

The system is simple, yet completely safe and efficient. It enables the rescuer to remove a person from danger without putting themselves at risk by descending to them.

- 33 ft. (10 m) travel length
- Kit is easily transported in backpack type bags
- Takes only a few minutes to set up and perform a rescue
- Rescue is performed safely from above victim
- Kit includes all necessary components for safe rescue

8900293

Rollgliss $^{\text{\tiny{TM}}}$ Rescue Kit with 66 ft. (10 m) travel length

8900294

Rollgliss™ Rescue Kit with 99 ft. (30 m) travel length

= rollgliss" =

8516294

ROLLGLISS™ RESCUE LADDER

The Rollgliss™ ladder provides a way to assist rescue after a fall has occurred. It can be anchored to a structure and dropped down to the victim's level, so they can climb either up or down to safety. The ladder can be used by any able-bodied victim not incapacitated by the fall.

- Available in 8 ft. (2.4 m) sections
- Extra sections can be added together for longer length
- Includes three carabiners for attachment

8516316

ROLLGLISS™ RESCUE LADDER ANCHOR

Accessory plate for mounting rescue ladder to a davit arm or single anchorage point.



5900177


TENSION LIMITER

Unique device attaches to man-riding system in-line between the person and the raising/lowering line to warn operator and limit forces on an entangled worker.

- Limits loading on person to 400 lbs. (182 kg) to prevent severe injury when entangled
- High visibility line is easy to see should deployment occur
- Portable and lightweight for easy transport and quick set up
- System is easily reset in the fieldd
- One time use

NOTE: Always use a separate back up fall protection device with this system.



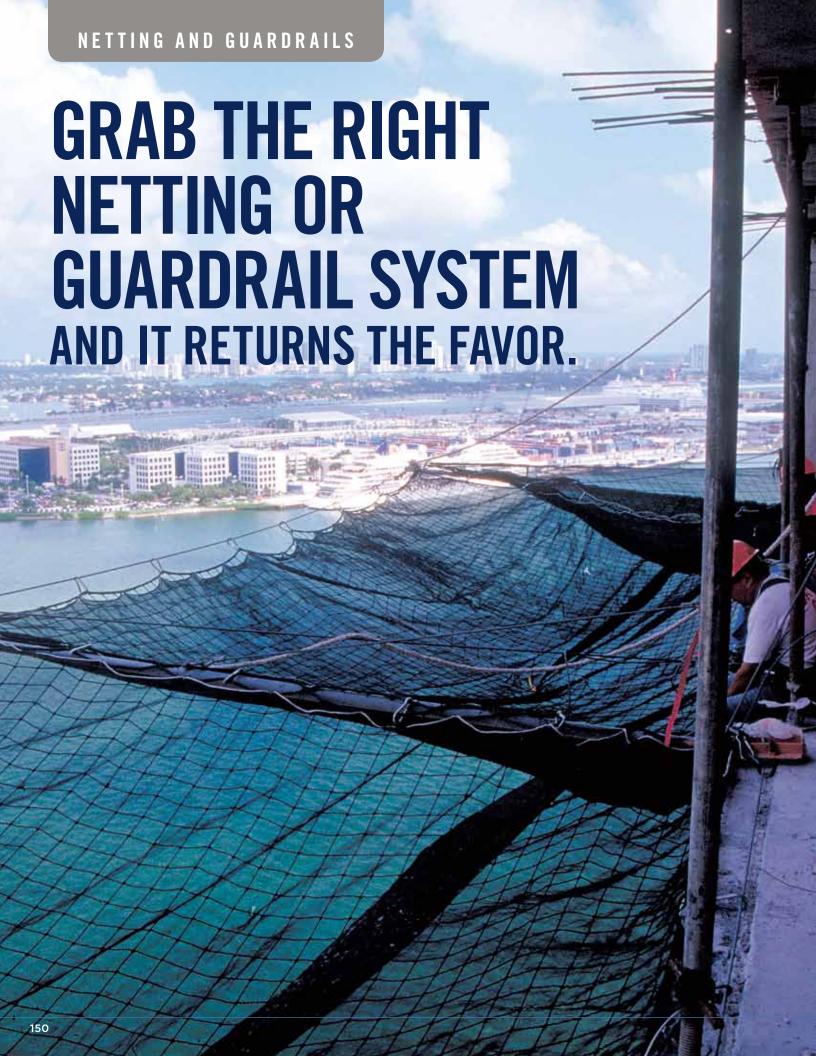





TYPES OF NETTING AND NETTING SYSTEMS

Nets and netting systems are designed to do three things: catch debris, catch personnel or a combination of both. Nets with a wide mesh (holes) are primarily used to catch people. Nets with a smaller mesh can handle both. And some wide mesh personnel nets are available with liners so they double as debris nets. All meet strict OSHA and ANSI regulations.

QUALITY MATERIAL

DBI-SALA® netting is rot proof, mildew proof and has UV protection for longer lasting service. Typical netting materials are polypropylene and nylon. We use nylon. It's 47% stronger than polypropylene, provides a softer catch and resists chafing and abrasion. Flame retardant protection can be applied at the factory for added safety and long wear.

ADJUSTABILITY

The patented Adjust-A-Net $^{\text{m}}$ is the only personnel net on the market that can be adjusted to fit the work area.

MESH SIZES AND LINERS

Meshes are available in many sizes and strengths, depending on the job. Some nets come with liners, so they catch both personnel and debris. The most common debris net mesh size is 1/8" (3 mm). A typical personnel net mesh size is 3-1/2" (87.5 mm). The diamond-shaped design dissipates strain throughout the net.



ANCHORING POINTS AND EASE OF INSTALLATION

DBI-SALA® netting systems are available with the related cable and hardware for installation to steel or concrete. They're lightweight and easy to handle for fast, safe installation and shifting from floor to floor.

SNAP HOOKS

DBI-SALA® netting systems feature a staggered system of lashed-in snap hooks, allowing the net to be quickly and easily connected.



Border Guard[™] Stanchion

PERSONNEL/ DEBRIS NETS

If you were to envision and create the ideal netting solution, your system would likely be designed to reliably catch both falling personnel and debris. DBI-SALA® has developed the technology to provide you with a single solution for both personnel and debris; because we all know that falls of either type can be detrimental to a project and a company.

SINCO™ BORDER GUARD™

Border Guard[™] is a DBI-SALA® exclusive. It's the first lightweight debris/personnel system made for rigging nets around the perimeter of new concrete buildings. Border Guard[™] is a convenient, economical way to ensure protection, confidence and productivity at your building site. It allows single floor attachment for closer protection at the pour level. Unlike alternative systems, Border Guard[™] comes in convenient units and installs with sturdy hardware that's half the weight of the old style net systems.

- Meets ANSI and OSHA standards for debris containment and for falls by personnel of 10 ft. or less
- Easily installed, from one level without a crane or special equipment
- Non-destructive floor clamps easily attach to concrete slabs
- Nets extend 10' (3 m) out from floor edge

PERIMETER DEBRIS/PERSONNEL NET SYSTEMS

4100151 BORDER GUARD™ STARTER KIT

1 ea. $10' \times 30'$ (3 m x 9 m) net, 4" (10 cm) black mesh with 1/8" (3.2 mm) debris liner and snap hooks, 2 ea. floor clamps, 2 ea. 10' (3 m) arms, 2 ea. 1/2" (12.7 mm) shackles, 8 ea. bolts, 6 ea. cable assemblies, 2 ea. straps with cam buckles.

4100153 BORDER GUARD™ ADD-ON KIT

1 ea. 10° x 30° (3 m x 9 m) net, 4° (10 cm) black mesh with $1/8^{\circ}$ (3.2 mm) debris liner and snap hooks, 2 ea. floor clamps, 1 ea. 10° (3 m) arm, 1 ea. $1/2^{\circ}$ (12.7 mm) shackle, 4 ea. bolts, 3 ea. cable assemblies, 1 ea. strap with cam buckle.

4100005 BORDER GUARD™ CORNER KIT

1 ea. 12' x 12' x 17' (3.6 m x 3.6 m x 5.2 m) net, 4" (10 cm) black mesh with 1/8" (3.2 mm), debris liner and snap hooks, 1 ea. cable assembly.

Additional size configurations, hardware kits and accessories are available.

PERSONNEL NETS

Personnel nets are designed to catch workers in unprotected areas such as bridges, buildings, towers, dams, silos, atriums, shafts, stairwells and skylights.



SINCO™ ADJUST-A-NET™ with Optional Debris Liner

Four basic Adjust-A-Net[™] models fit any size or shaped work spaces. You can shrink one down for compact areas, reduce one side or the other for long, narrow applications or snap two together for the largest areas. Adjust-A-Net™ must be erected so that workers can never fall more than 25' (7.5 m).

- Adjustable straps allow 50% reduction of its original size
- 3-1/2" (8.75 cm) provides better protection
- Special coating protects from UV light, resists abrasion, bonds all convergent points
- Built-in test cords allow evaluation of integrity
- Rugged steel snap hooks placed every 48" (1.2 m)
- Available attached debris liner with 1/8" (3.2 mm) mesh
- Long-wearing, high-tenacity nylon, tested to 17,500 lb. (70kN)

ADJU	ADJUST-A-NET™ PERSONNEL NETS							
DEBRIS Liner	10' x 5' (3 x 1.5 m)	10' x 10' (3 x 3 m)	10' x 15' (3 x 4.5 m)	15' x 30' (4.5 x 9 m)	20' x 40' (6 x 12 m)	25' x 50' (7.5 x 15 m)	30' x 60' (9 x 18 m)	
				4100100	4100101	4100102	4100103	
•	4100406	4100405	4100404	4100400	4100401	4100402	4100403	



SINCO™ FLYING FORM NET

Flying Form nets are made for today's multi-story buildings that use "flying forms" to construct concrete floors. Even though there are no tie-off anchorages above, it protects workers while they're placing the forming deck.

- One time installation
- UV protected nylon mesh
- Passive fall arrest and debris retention

4102003 Flying Form Netting System (specify custom size)



SINCO™ POUR-IN-PLACE NET

Pour-In-Place netting provides personnel fall protection on unprotected floor openings. It's designed to cover small voids such as stairwells, mechanical chases or elevator shafts, by being poured into the concrete. Custom sizes are available.

- Passive fall arrest and debris retention
- Durable nylon mesh
- Fast, easy removal

4102001

Pour-In-Place net, 8' x 50' (2.4 m x 15.4 m), no border, black

4102002 Pour-In-Place net, 8' x 100' (2.4 m x 30.5 m), no border, black

DEBRIS NETS

Debris nets catch lightweight construction debris, tools and building materials. They prevent injury to workers, pedestrians, structures and materials below. Unlike hard hats, which protect only the head, Debris Nets offer protection from falling objects for the whole person. Perimeter debris nets meet OSHA and ANSI standards.

SINCO™ VERTICAL DEBRIS NET

Its highly visible, bright orange mesh protects workers near building edges as a guardrail, and replaces mid-rail and toe boards, making it less expensive and easier to install. Designed for use with traditional cable set-ups, the nets are easy to remove, relocate, handle and store. Snap-on cable clips are available for easy attachment to the cables. The bottom edge of the net is quickly secured using a power tool that fires a nail into the tie-down plate.

- UV resistant, fire retardant
- Exceeds OSHA's 200 lb. (90 kg) strength requirements and New York City construction codes

VERTICAL NET DEBRIS SYSTEM						
NET COLOR	ATTACHMENT KIT 48" x 100'		66" x 100'			
Orango		4100200	4100201			
Orange	•	4100300	4100301			
Blue		4100204	4100205			
Diue	-	4100304	4100305			

4100003 Attachment Kit Only - 55 zip clips and 22 tie-down plates 4100275 25-pack of cable ties, 20" nylon, 250 lb.



SINCO™ FLOOR-TO-CEILING DEBRIS NET

Our floor-to-ceiling panels provide complete containment of project debris and are strong enough to meet guardrail requirements for personnel. Debris panels are easily connected to a top and bottom cable and are reusable throughout the life of the project. Multiple floors can be protected, prior to clean up, and then nets can be rotated upward, ahead of the cladding or glazing operations.


FLOOR-TO-CEILING DEBRIS NETTING SYSTEM

4102000 Floor-to-Ceiling Vertical Net System
3-layer netting, with snap hooks, 9'6" tall x 30'
(2.9 m x 9.15 m)

4195436 Floor-to-Ceiling Fastener Plates, 16-pack

Custom sizing available—please call.



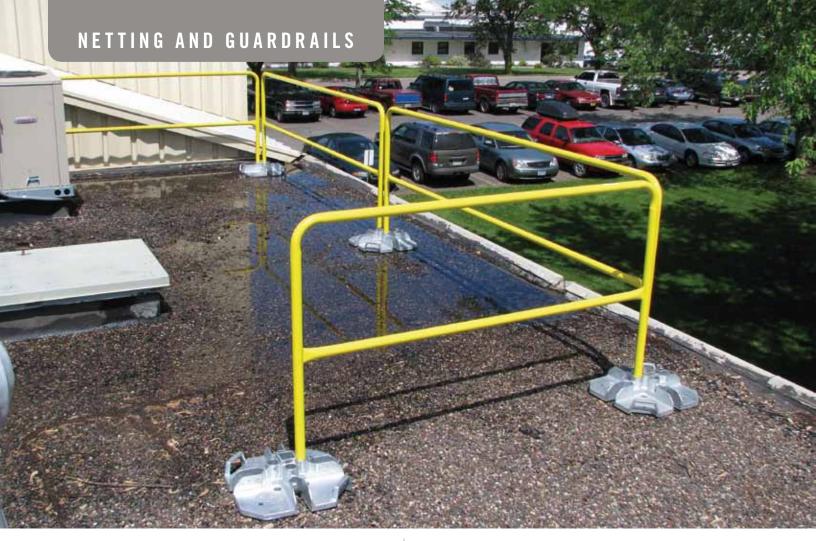

PORTABLE GUARDRAIL SYSTEM

This system acts as a barrier preventing personnel from falling to lower levels, thus eliminating the fall hazard. This system can protect employees with little or no training, special maintenance or gear.

- Free-standing system eliminates surface penetration
- Built-in rail and toe board receptacles allow for infinite configurations
- Rubber pad provides skid resistance and protects the roof surface
- Ergonomic handles allow for easy transportation and set-up
- Fast and easy set-screw installation, insert rail and tighten
- Corrosion resistant construction for longevity



6 ft. (1.8 m) guardrail section, steel, powder coated.

7900062 8 ft. (2.4 m) guardrail section

7900063 10 ft. (3 m) guardrail section



7900060

GUARDRAIL BASE

Galvanized base assembly for guardrail system, 70 lbs. (32 kg).



7900005

GUARDRAIL SPLICE KIT

Powder coated steel splice kit allows user to connect customized shortened rail sections together.



7900007

GUARDRAIL GATE

Powder coated steel swing gate, adjustable from 23"- 38" (58.4 cm-96.5 cm).

GUARDRAIL ACCESSORIES

790008 Guardrail Roof Hatch Kit, includes: (4 ea.) 7900060 Guardrail Bases, (1 ea.) 7900007 Guardrail Gate, (3 ea.) 7900005 Guardrail Splice Kits, (3 ea.) 7900061 6 ft. (1.8 m) Rails

7900054 Guardrail Base Transport Cart, accommodates 4 bases (not shown)





INNOVATION THAT BRINGS WORKERS AT HEIGHT HOME SAFELY.

Capital Safety is a global company solely dedicated to fall protection and rescue. Our focus is razor sharp.

And it continually drives us to design and manufacture the safest possible height safety gear.

We understand the industries we serve and listen to the workers in the field. We employ the best engineers to create innovative solutions and patent the products that keep workers safe at heights around the world. Capital Safety has the best quality and largest range of fall protection products in the industry. But we're more than a product company.

We take an innovative approach in bringing our products to the field. We have created international partnerships and a vast network of authorized distributors, certified installers and service centers. We offer on-site and in-house training.

And we're ISO 9001-2000 certified for customer service, as well as manufacturing and engineering.

Capital Safety is one of the world's leading manufacturers of fall protection and rescue equipment, with decades of experience and a legacy of innovation. Look for complete solutions in our extensive line of DBI-SALA®, Uniline® and Protecta® products.

